



Extract from our online catalogue:

crm+600/IU/TC/E

Current to: 2016-11-18



Wear-resistant PEEK film protects the sensor membrane from chemicals, contamination and caking.

HIGHLIGHTS

- › Ultrasonic transducer protected by PEEK film › for simple cleaning and high resistance to wear
- › Stainless-steel housing
- › Digital display with direct measured value output in mm/cm or %
- › Numeric configuration of the sensor using digital display › permits the complete advance configuration of the sensor
- › Automatic synchronisation and multiplex operation › for simultaneous operation of up to ten sensors in close quarters

BASICS

- › 1 or 2 switching outputs in pnp variant
- › Analogue output 4–20 mA and 0–10 V › with automatic switching between current and voltage outputs
- › 5 detection ranges with a measurement range of 30 mm to 8 m
- › microsonic Teach-in using T1 or T2 buttons
- › 0.025 mm to 2.4 mm resolution
- › Temperature compensation
- › 9–30 V operating voltage
- › LinkControl › for configuration of sensors from a PC

Description

Sensor membrane with wear-resistant protective film


In many filling processes, spray on the sensor membrane simply cannot be avoided. These sprays often harden so that after longer periods of operation contamination can only be removed from the sensor membrane by mechanical means. The new protective film of the crm+ sensors now makes it easy to remove caked-on soiling, such as hardened casting compound and cement spatter.

The protective film is also highly resistant to corrosive media. The threaded sleeve is made of 1.4571 stainless steel.



TouchControl with LED display - Wear-resistant PEEK protective film

There are three output stages available for all five detection ranges:

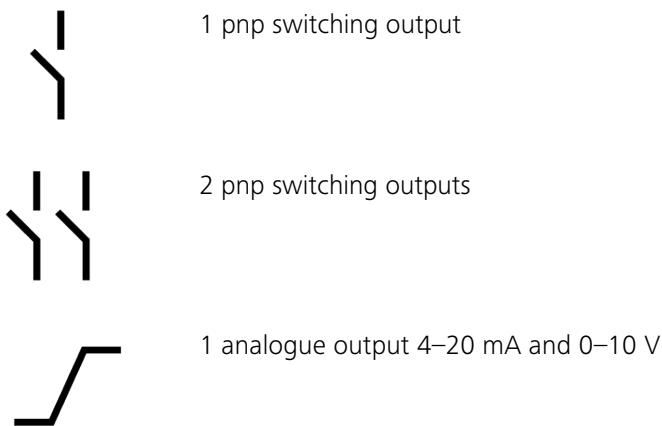

The crm+ sensors with switching output have three operating modes:

- › Single switching point
- › Two-way reflective barrier
- › Window mode

With TouchControl

all configuration can be done right at the sensor. The easily legible three-digit LED display continually shows the current

distance value and automatically switches between millimetre and centimetre displays.


Setting a switching or analogue output

can optionally be carried out by numeric input of the desired distance values, or using a teach-in procedure. This permits the user to select the configuration method preferred.

The crm+ sensors support synchronisation and multiplex operation and have extensive parameterisation options via LinkControl. For detailed information, please see at [mic+ sensors](#) .

LinkControl


consists of the LinkControl adapter and the LinkControl software and facilitates the configuration of the crm+ sensors via a PC or laptop with any conventional Windows® operating system.

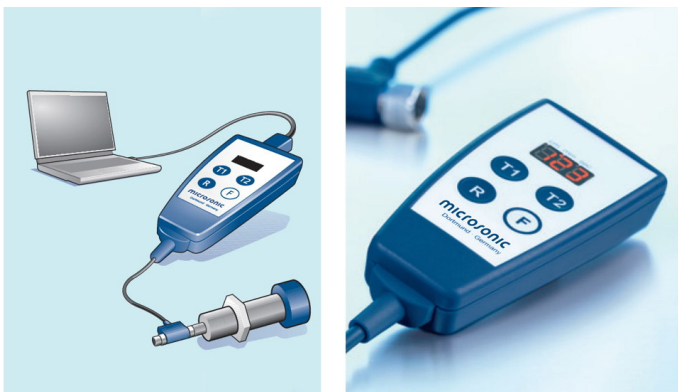


Sensor connected to the PC via LCA-2 for programming

crm+600/IU/TC/E

scale drawing

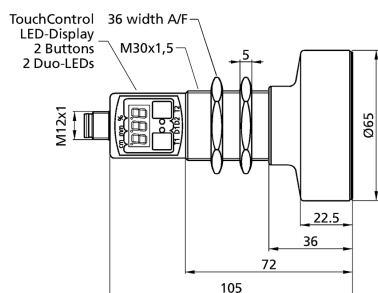

detection zone

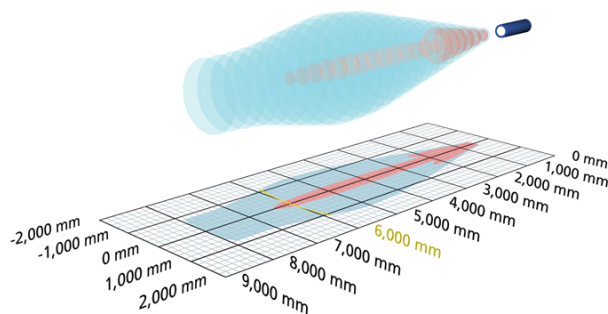

1 x analogue 4-20 mA + 0-10 V



8,000 mm

| | |
|-----------------|--|
| operating range | 600 - 8.000 mm |
| design | cylindrical M30 |
| operating mode | analogue distance measurements |
| particularities | high chemical resistance stainless steel version display |

ultrasonic-specific

| | |
|--------------------------|--|
| means of measurement | echo propagation time measurement |
| transducer frequency | 80 kHz |
| blind zone | 600 mm |
| operating range | 6,000 mm |
| maximum range | 8,000 mm |
| resolution/sampling rate | 0.18 mm |
| reproducibility | ± 0.15 % |
| accuracy | ± 1 % (temperature drift internally compensated) |

electrical data

| | |
|-----------------------------|--|
| operating voltage U_B | 9 - 30 V d.c., reverse polarity protection |
| voltage ripple | ± 10 % |
| no-load current consumption | ≤ 80 mA |
| type of connection | 5-pin M12 initiator plug |

crm+600/IU/TC/E

outputs

| | |
|-----------------------------|--|
| output 1 | analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling |
| response time | 240 ms |
| delay prior to availability | < 450 ms |

inputs

| | |
|---------|------------------------------------|
| input 1 | com input synchronisation input |
|---------|------------------------------------|

housing

| | |
|---------------------------------|--|
| material | stainless steel, plastic parts: PBT, TPU |
| ultrasonic transducer | coated with PEEK film, PTFE O-ring |
| class of protection to EN 60529 | IP 67 |
| operating temperature | -25°C to +70°C |
| storage temperature | -40°C to +85°C |
| weight | 210 g |
| further versions | cable connection (on request) |


technical features/characteristics

| | |
|--------------------------|---|
| temperature compensation | yes |
| controls | 2 push-buttons + LED display (TouchControl) |
| scope for settings | Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl |
| Synchronisation | yes |
| multiplex | yes |
| indicators | 3-digit LED display, 2 x three-colour LED |
| particularities | high chemical resistance stainless steel version display |

crm+600/IU/TC/E

[documentation \(download\)](#)

pin assignment

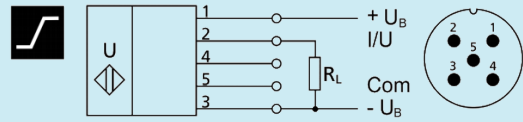

order no.

crm+600/IU/TC/E