


# PCI EXPRESS® JUMPERS

(1.00 mm) .0394" PITCH • PCIEC SERIES

14  
Gbps

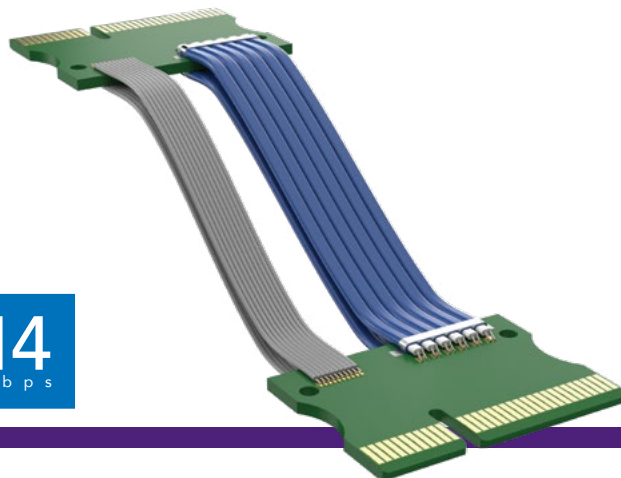

## PCIEC

Mates:  
PCIE, PCIE-LP

### SPECIFICATIONS

**Cable:**  
Eye Speed® 30 AWG twinax or  
Eye Speed® 32 AWG twinax;  
30 AWG insulated ribbon

**Operating Temp:**  
-25 °C to +105 °C

**Contact:**  
Phosphor Bronze

**Plating:**  
Au or Sn over 50 μ" Ni

**Performance:**  
Supports PCIe® Gen 2 & 3

**Bend Radius:**  
(3.18 mm) .125"

**-EM Connector:**  
Black Nylon

**Card Insertion Depth:**  
(8.00 mm) .315"


PCIEC	NO. OF POSITIONS	WIRE LENGTH	END NO. 1	END NO. 2	CABLE OPTION	IMPEDANCE
	-036 (x1), -064 (x4), -098 (x8), -164 (x16)	- "XXXX" = Wire Length in millimeters 0050 mm minimum	-EC = Edge Card	-EC = PCIe® Edge Card  -EM = PCIe® Edge Mount Connector	Specify CABLE OPTION from chart	Leave blank for 100 Ω  -85 = 85 Ω

CABLE OPTION	IMPEDANCE	
	85 Ω	100 Ω
BLANK	32 AWG TAPED SHIELD	NOT AVAILABLE*
-C (No Power Lines)	NOT TOOLED*	30 AWG TAPED SHIELD
-CP (With Power Lines)	NOT TOOLED*	30 AWG TAPED SHIELD
-P (With Power Lines)	32 AWG TAPED SHIELD	NOT AVAILABLE*

\* Contact [hdr@samtec.com](mailto:hdr@samtec.com) for information

### APPLICATIONS

Loop back Extender (From one PCIe® slot to another PCIe® slot)  
Ser-Des Physical Extender (From one PCIe® slot to another PCIe® Ser-Des)  
Physical Extender for easy troubleshooting of PCIe® card debug and analysis  
(PCIe® slot to Emulator or Analyzer)

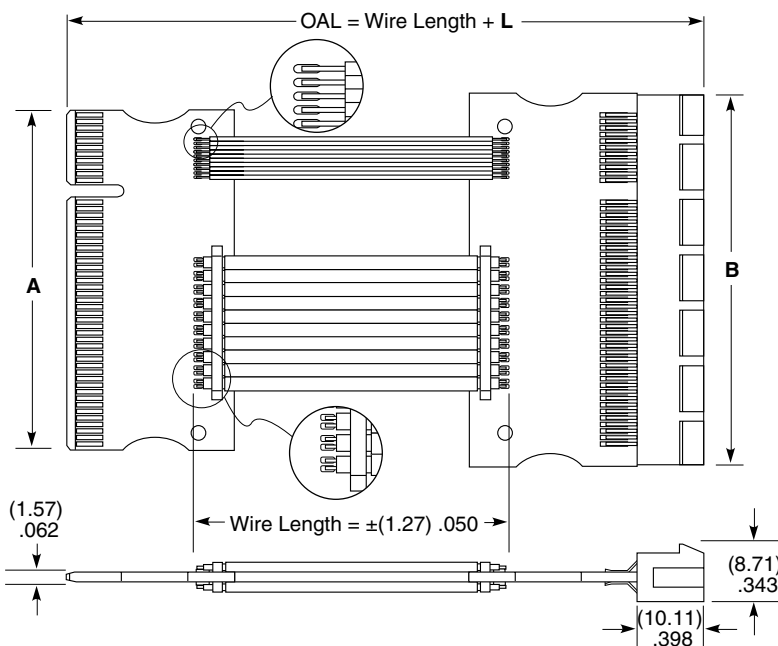

END TO END	L
-EC to -EC	(39.6) 1.56
-EC to -EM	(49.6) 1.95

NO. OF POSITIONS	A	B
-036 (x1)	(20.30) .800	(25.40) 1.00
-064 (x4)	(34.30) 1.35	(39.40) 1.55
-098 (x8)	(51.30) 2.02	(56.40) 2.22
-164 (x16)	(84.30) 3.32	(89.40) 3.52

**Notes:**  
Cable lengths longer than  
40.00" (1 meter) are not  
supported with S.I. test data.

Design your full cable  
assembly with Samtec's  
High-Speed Cable Builder at  
[www.samtec.com/cablebuilder](http://www.samtec.com/cablebuilder)

PCI-SIG®, PCI Express® and  
the PCIe® design marks are  
registered trademarks and/or  
service marks of PCI-SIG

This Series is non-standard,  
non-returnable.