


Midi Industrial Relay Type RMI. 2-10 10A Monostable

CARLO GAVAZZI

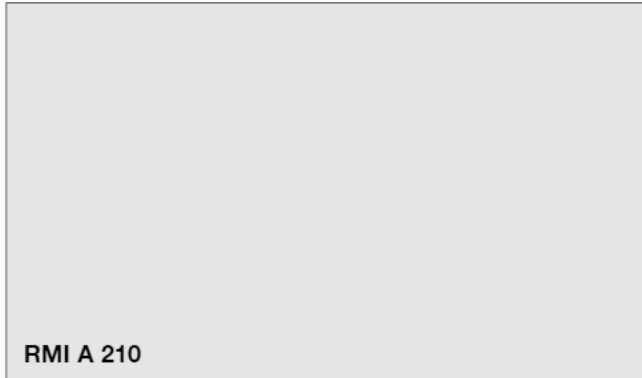

- High switching power
- Small size
- 2 poles configuration
- AC coils 6 to 230VAC
- DC coils 5 to 110VDC
- 3750VAC dielectric coil to contacts
- Standard with LED, Push with arm and Flag
- IP 40
- Compliant with the CE low voltage directive
- TÜV, UL, CSA, IMQ approved

Product Description

The RMI relay (relay mini-industrial) can be used for a wide range of industrial applications.

Available in 2 change-over contact configuration. PCB, solder and plug-in terminals.

Approvals



Ordering Key

RMI A 210 12DC /1

Type _____
 Terminal version _____
 Contact code _____
 Coil code _____
 Options _____

Terminal version: A = Soldering terminals
 B = PCB terminals

Box content: 25 relays
 Box size: (W 125 x D 165 x H 50) mm Weight: 850g
 (W 4.92 x D 6.50 x H 1.97) inches Weight: 29.98oz

Type Selection

Contact configuration	Contact rating	Contact code
2 change over contacts (DPDT {2-form C})	10A	210

Coil Characteristics, DC 0.9W


Coil Code	Nominal voltage VDC	@ +20°C (+68°F)		Coil resistance Ω
		Pick-up voltage VDC	Drop-out voltage DVC	
5VDC	5	4.0	0.5	27.5 ±10%
6VDC	6	4.8	0.6	40.0 ±10%
12VDC	12	9.6	1.2	160.0 ±10%
24VDC	24	19.2	2.4	650.0 ±10%
48VDC	48	38.4	4.8	2600.0 ±15%
60VDC	60	48.0	6.0	11000.0 ±15%
110VDC	110	88.0	11.0	11000.0 ±15%

Coil Characteristics, AC 1.2VA

Coil Code	Nominal voltage VAC	@ +20°C (+68°F)		Coil resistance Ω
		Pick-up voltage VAC	Drop-out voltage VAC	
6VAC	6	4.8	1.8	40.0 ±10%
12VAC	12	9.6	3.6	160.0 ±10%
24VAC	24	19.2	7.2	650.0 ±10%
48VAC	48	38.4	14.4	2600.0 ±10%
115/120VAC	110-120	96.0	36.0	11000.0 ±15%
230VAC	220-240	176.0	66.0	11000.0 ±15%

Options

Nil = Standard with Push Arm -LED (A1+) (A2-) - Flag
 /0 = Diode against polarity reverse + free-wheeling Diode (A1+) (A2-)
 /1 = Without LED
 /2 = Without Flag
 /3 = Without Push Arm
 /4 = Plated Contacts Au > 5µm
 /5 = Flash Gilded Contacts Au > 1µm
 /6 = Free-Wheeling Diode (A1+) (A2-)
 /7 = Free-Wheeling Diode (A1-) (A2+)

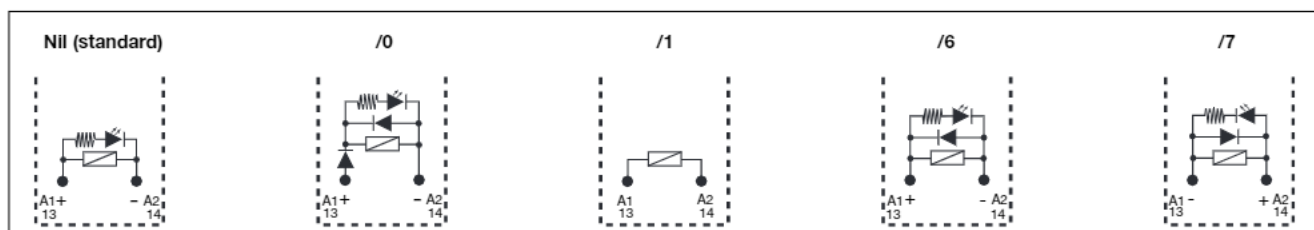

Contact Characteristics

Contact rating (with resistive load)	10A - 250VAC / 30VDC	Minimum Current	5mA @ 12VDC
UL rating	10A - 250VAC / 30VDC 1/3HP @ 240VAC	Min. applicable load /4 and /5 versions	1mA @ 6VDC
Max. rating	10A - 250VAC / 30VDC	Max. switch. voltage	250VAC / 30VDC @ 10A
Material	AgCe	Max. switch. power	2500VA / 300W @ 10A
Initial contact resistance	50mΩ (@ 1A 6VDC)	Life	1x10 ⁵ cycles (1800 Ops/h)
		Electrical life	1x10 ⁷ cycles (1800 Ops/h)
		Mechanical life	


Insulation

Test Voltage (1 min.)	3750VAC Vr.m.s	Insulation according to EN61810-5	250V
Between coil and contacts	750VAC Vr.m.s	Rated insulation voltage	3.6kV
Between open contacts	1250VA Vr.m.s	Impulsive insulation voltage	2
Contact/Contact	1.000MΩ - 500VAC	Pollution degree	III
Initial insulation resistance		Overvoltage category	


General Data

Nominal coil power	0.9W DC / 1.2VA AC	Shock resistance	100m/s ² / 10g 11ms
Operating time (At nominal voltage)	20ms max.	Functional	1000m/s ² / 100g
Release time (At nominal voltage)	20ms max.	Destructive	
Ambient temperature	-55° to +70°C (-67° to +158°F)	Humidity	35% to 95% RH non-condensing
Vibration resistance	10 to 55Hz 1.0mm (0.04")	Terminals	PCB or Soldering Lugs (Plug-in)
Construction	Dust cover	Weight	~37g (~1.30oz)


Pin View mm/inches

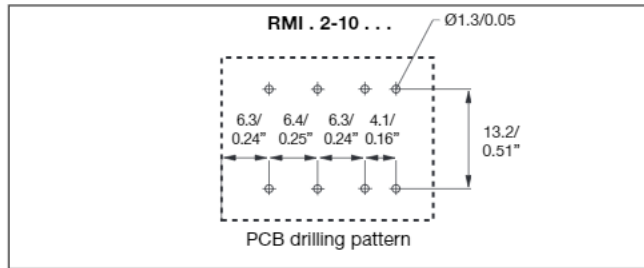

Wiring Diagram

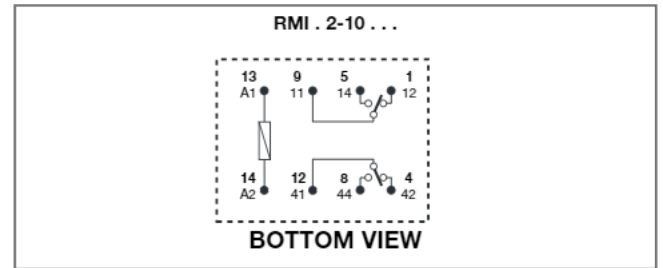


Dimensions mm/inches

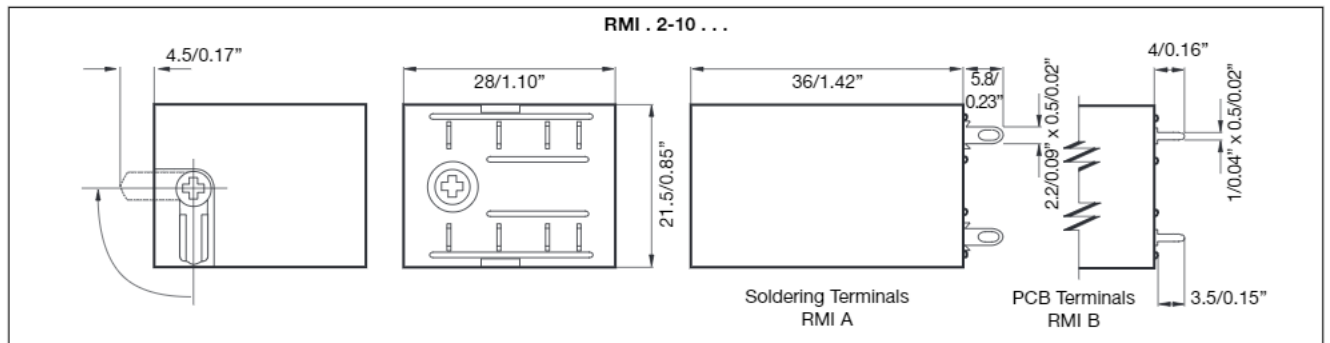


Diagrams



1 Coil Operating Range

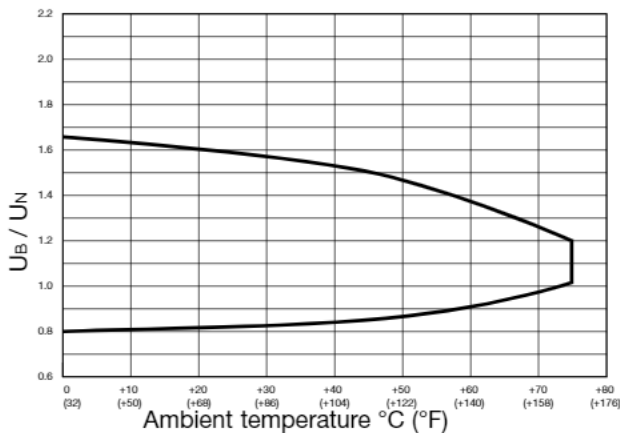

2 Max. DC load breaking capacity

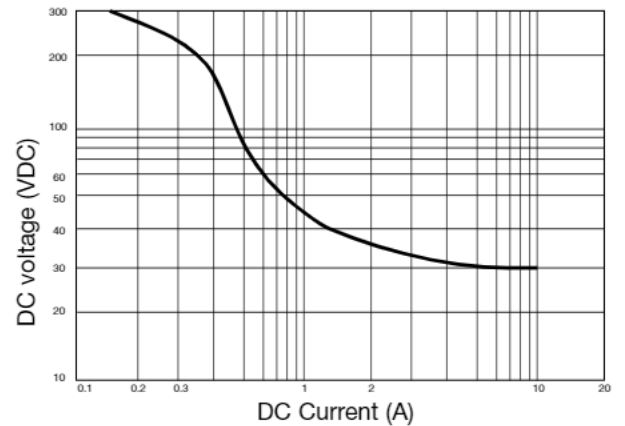

3 Electrical life

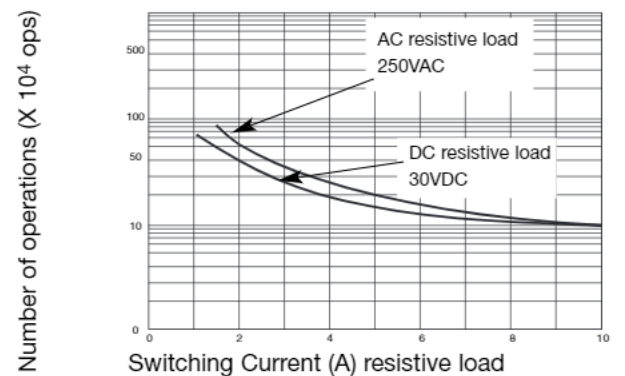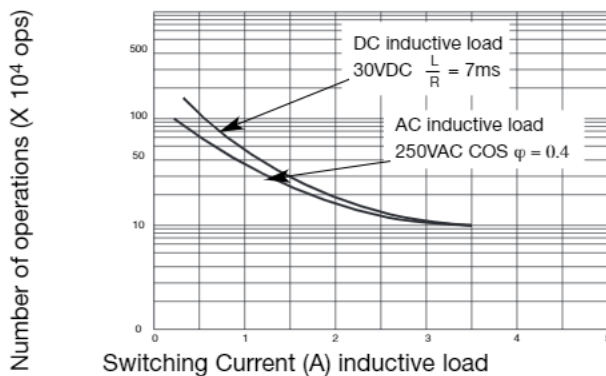

Bases and Sockets

DIN rail sockets codes are ZMI2NA, ZMI4NA, ZMI2SA, ZMI4SA, ZMI2GA, ZMI4GA, ZR08 and ZDM14A details and specifications from page 45 to 49 of industrial relays catalogue.

PCB sockets codes are ZC15/2A, ZC15/4A, ZC15/2 and ZC15/4 details and specifications on page 51 of industrial relays catalogue.

Specifications are subject to change without notice. Pictures are just an example. For special features and/or customization, please ask to our sales network