




Fuses for Semiconductor Protection
North American and European Standard Type SQB

Size **SQB1** Rated Voltage **AC 600-690/700 V** Standard **DIN 43653 / 80 mm Fixing**

Rated Current [A]	Part No.	UL Rec.	Rated Voltage [V]	Weight [kg/1]	Pack
63	20 610 31.63	✓	690/700	0.51	3
80	20 610 31.80	✓	690/700	0.51	3
100	20 610 31.100	✓	690/700	0.51	3
125	20 610 31.125	✓	690/700	0.51	3
160	20 610 31.160	✓	690/700	0.51	3
200	20 610 31.200	✓	690/700	0.51	3
250	20 610 31.250	✓	690/700	0.51	3
315	20 610 31.315	✓	690/700	0.51	3
350	20 610 31.350	✓	690/700	0.51	3
400	20 610 31.400	✓	690/700	0.51	3
450	20 610 31.450	✓	690/700	0.51	3
500	20 610 31.500	✓	690/700	0.51	3
550	20 610 31.550	✓	690/700	0.51	3
630	20 610 31.630	✓	690/700	0.51	3
700	20 610 31.700	✓	690/700	0.51	3
800	20 610 31.800	✓	690/700	0.51	3
900	20 610 31.900	✓	600	0.51	3

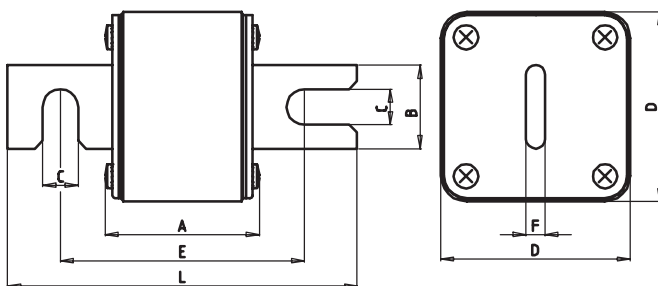

Techn. Data
Page URS 70

A	1.87" (47.5 mm)
B	1.02" (26 mm)
C	0.43" (11 mm)
D	2.00" (51 mm)
E	3.00" (76 mm)
F	0.24" (6 mm)
L	4.29" (109 mm)