




**Part Number: T80-14B**

Revision 20170912 - Generated 2017-Sep-20

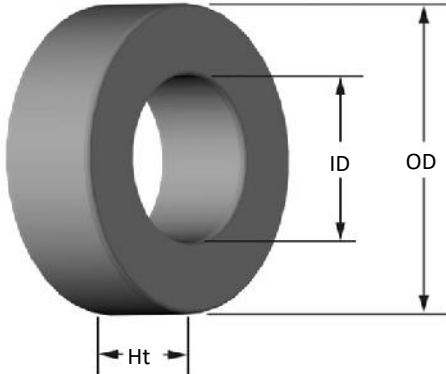

<b>OD</b>	(nom. - bare core)	20.19 mm	0.795 in
	(max. - after coating)	20.70 mm	0.815 in
<b>ID</b>	(nom. - bare core)	12.57 mm	0.495 in
	(min. - after coating)	12.07 mm	0.475 in
<b>Ht</b>	(nom. - bare core)	9.53 mm	0.375 in
	(max. - after coating)	10.16 mm	0.400 in
<b>Mass</b>	(approximate)	9.3 grams	
<b>Magnetic Dimensions</b>	$A_e$ - Eff. Mag. Cross Section	0.347 cm <sup>2</sup>	
	$L_e$ - Eff. Mag. Path Length	5.14 cm	
	$V_e$ - Eff. Core Volume	1.78 cm <sup>3</sup>	
	WA - Min. Eff. Window Area	1.14 cm <sup>2</sup>	
	sa - Surface Area	17.4 cm <sup>2</sup>	
	mlt - mean length per turn	3.50 cm	
	$\mu_i$ (reference)	14	
<b>Inductance</b>	$A_L$ value (nominal)	11 nH/N <sup>2</sup>	
	Test Winding	N=100, #28 AWG	
	Frequency	1 MHz	
	Voltage on Agilent 4284A	1.0 V	
	$A_L$ tolerance	±10%	
	$L_e$ tolerance	±10%	
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{B_{pk}^3 + B_{pk}^{2.3} + B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where $B_{pk}$ expressed in gauss, $f$ expressed in hertz, and: $a=4.00E+09$ , $b=3.00E+08$ , $c=2.70E+06$ , $d=1.92E-15$		
	$B_{pk}$	140 G	
	frequency	100 kHz	
	Core Loss (nominal)	18 mW/cm <sup>3</sup>	
Core Loss (maximum)	21 mW/cm <sup>3</sup>		
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.00E-02$ , $b=3.90E-07$ , $c=1.46$ , $d=0.00$		
	$H_{DC}$	200 Oe	
	Percent Initial Perm.(nom.)	91.8%	
Percent Initial Perm.(min.)	89.6%		
<b>Coating/Pkg</b>	Coating Type:	Black/Red Epoxy Paint	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	3 mA, 5 s	
	Package Quantity	1,250 Pcs/Box	

<b>Winding Table</b>	<b>Wire Size</b>	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	<b>Single Layer</b>	Turns	10	13	17	22	28	35	44	56	70	88	110
		Rdc(Ω)	1.1 m	2.4 m	4.9 m	10.1 m	20.5 m	40.7 m	81.5 m	164.9 m	327.8 m	655.4 m	1.3
<b>Full Winding</b>	Turns	9	14	22	34	53	82	127	197	305	472	731	
	Rdc(Ω)	1.0 m	2.5 m	6.4 m	15.6 m	38.8 m	95.5 m	235.1 m	580.0 m	1.4	3.5	8.7	

