

UFT75-12

12V 75AH
Front Terminal

Ultracell®

Quality in Every Language

UFT75-12



Physical Specification





Part Number	UFT75-12
Length	564 ± 2 mm
Width	114 ± 2 mm
Container Height	187 ± 2 mm
Total Height (with terminal)	187 ± 2 mm
Approx Weight	26 kg

Specifications

	Nominal Voltage	12V
	Nominal Capacity (10HR)	75AH
Terminal Type	Standard Terminal	F6
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	UL94-V0
Rated Capacity	20hr, 1.80V/cell, 25°C	82.5AH/4.12A
	10hr, 1.80V/cell, 25°C	77.9 AH/7.79A
	5hr, 1.75V/cell, 25°C	65.5 AH/13.1A
	3hr, 1.75V/cell, 25°C	59.4AH/19.8A
	1hr, 1.60V/cell, 25°C	53.3 AH/53.3A
Max Discharge Current	750A (5s)	
Internal Resistance	Approx 5.0m Ω	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C
		Charge: 0 ~ 40°C
		Storage: -15 ~ 40°C
	Nominal Operating Temp. Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 22.5A Voltage 14.4V ~ 15.0V Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V Temp. Coefficient -20mV/°C
Capacity affect by Temperature	40°C	103%
	25°C	100%
	0°C	86%
Design Floating Life at 20°C	12+ Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

F6 Terminal

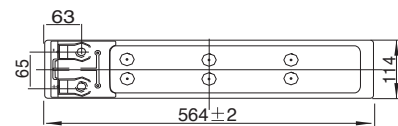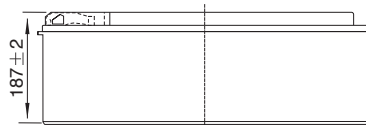


Constant Current Discharge (Amperes) at 20°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	130.4	108.7	93.3	73.2	56.8	46.1	27.5	19.8	15.9	13.2	11.5	8.92	7.44	3.94
1.80V/cell	147.9	121.2	103.3	80.1	61.1	49.2	29.0	21.1	16.7	13.9	12.0	9.38	7.79	4.12
1.75V/cell	162.3	131.1	110.2	84.2	63.4	51.0	29.6	21.4	17.2	14.2	12.2	9.49	7.88	4.19
1.70V/cell	173.6	138.1	114.7	86.6	64.8	51.7	30.0	21.6	17.3	14.3	12.4	9.62	7.95	4.22
1.67V/cell	179.6	141.6	117.0	87.7	65.1	51.9	30.1	21.8	17.4	14.4	12.5	9.75	8.03	4.24
1.60V/cell	188.8	147.0	122.3	89.9	66.8	53.3	30.6	22.2	17.8	14.8	12.8	9.98	8.18	4.26


Constant Power Discharge (Watts) at 20°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	243.6	205.1	177.8	140.9	110.2	89.9	54.0	39.0	31.4	26.1	22.8	17.8	14.9	7.89
1.80V/cell	272.9	225.5	193.9	151.9	117.7	95.5	56.6	41.3	32.9	27.3	23.8	18.6	15.5	8.24
1.75V/cell	294.7	241.1	204.9	158.3	121.0	98.4	57.4	41.8	33.6	27.8	24.1	18.8	15.7	8.35
1.70V/cell	308.2	250.4	211.6	162.1	123.3	99.4	58.1	42.1	33.8	27.9	24.4	19.1	15.8	8.41
1.67V/cell	317.7	255.6	215.1	163.8	123.4	99.6	58.2	42.3	34.0	28.2	24.6	19.3	16.0	8.44
1.60V/cell	324.8	260.2	221.6	165.7	125.3	101.2	58.7	42.8	34.5	28.8	25.0	19.7	16.2	8.47


Discharge Characteristics

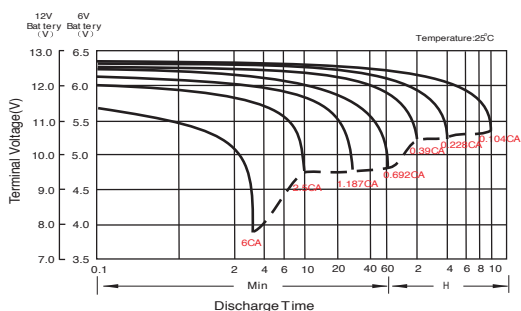


Float Charging Characteristics

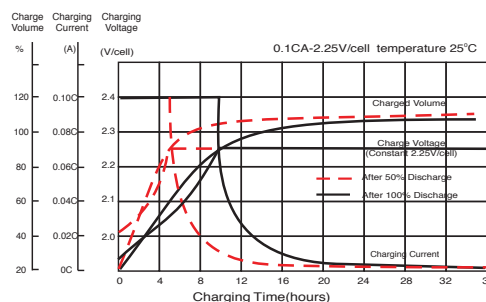


Temperature Effects in Relation to Battery Capacity

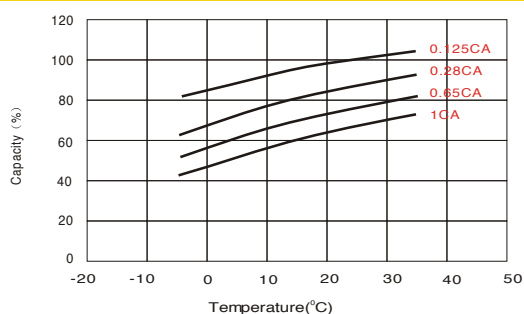

Effect of Temperature on Long Term Float Life

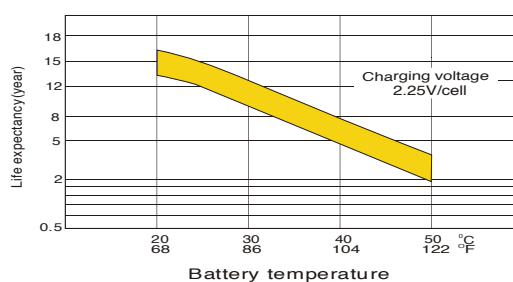

Self Discharge Characteristics

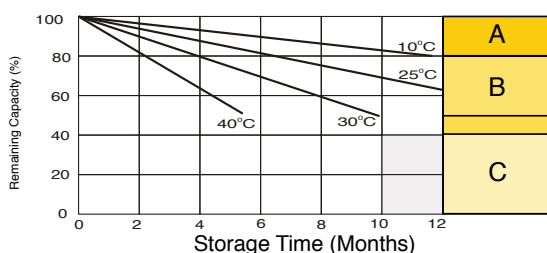

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8~10hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.