




**Type
190000**



**Zeit/Strom-Kennlinien
Time-Current Characteristics**

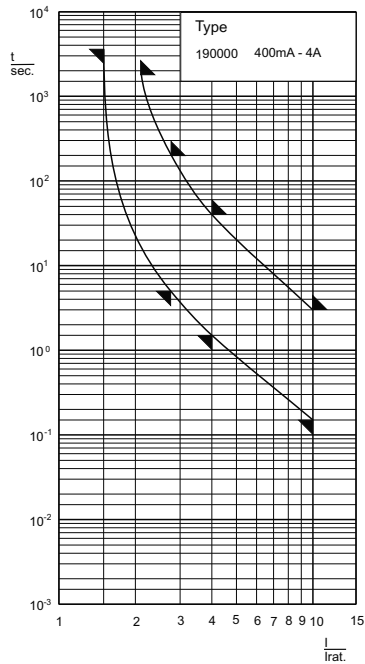

**Abmessungen
Dimensions**



Aufbau / Construction

Glasrohr / glass tube

durchsichtig / transparent

Kontaktkappen / end caps

Messing, vernickelt / brass, nickel-plated

Schmelzeitgrenzwerte / Fusing time limits

Bemessungsstrom Rated Current	1,5 I _n		2,1 I _n		2,75 I _n		4 I _n		10 I _n	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
400 mA - 4 A	1 h	30 min	5 s	200 s	1,5 s	40 s	150 ms	3 s		

Sondertyp Special type	5 x 20 mm	250 V	TT superträge time-lag
---------------------------	------------------	-------	------------------------------

Artikel-Nr. Article-no.	Bemessungs- strom Rated Current	Bemessungs- Ausschaltvermögen Rated Breaking Capacity	Spannungsfall Voltage Drop	Leistungsabgabe Power Dissipa- tion (@1,5 I _n) mW	Schmelz- integral I ² t _s Value A ² s	Approbationen Approvals
190000.0,4	400 mA	35 A @ AC 250 V	500 mV	0,3	2,5	
190000.0,5	500 mA	35 A @ AC 250 V	450 mV	0,3	4,6	
190000.0,63	630 mA	35 A @ AC 250 V	400 mV	0,3	10	
190000.0,8	800 mA	35 A @ AC 250 V	300 mV	0,4	15	
190000.1	1 A	35 A @ AC 250 V	250 mV	0,4	26	
190000.1,25	1,25 A	35 A @ AC 250 V	200 mV	0,4	37	
190000.1,6	1,6 A	35 A @ AC 250 V	200 mV	0,5	45	
190000.2	2 A	35 A @ AC 250 V	200 mV	0,6	72	
190000.2,5	2,5 A	35 A @ AC 250 V	150 mV	0,6	130	
190000.3,15	3,15 A	35 A @ AC 250 V	150 mV	0,6	230	
190000.4	4 A	40 A @ AC 250 V	100 mV	0,8	370	

Type	Abk. Abbr.	Beschreibung Description
190000	-	100 Stück / Pieces (10 x 10)
	IP	1.000 Stück Industrieverpackung / 1.000 pieces industrial packs
z.B./ e.g.	190000.ZIP	