

NEOZED-FUSE LINK 400V GL/GG,GR.D02, 40A,
COLLAPSIBLE BOX



Figure similar

Model		
product brand name		SENTRON
Product variations		Pack of 10
Design of the fuse link		NEOZED fuse links
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		D02
Operating class of the fuse link		gG
circuit-breaker / Design		5SE2
Supply voltage		
• with AC / Rated value	V	400
Protection class		
Protection class IP		IP20, with connected conductors
Switching capacity		
Switching capacity current / acc. to IEC 60947-2 / Rated value	kA	50
Dissipation		
Active power loss		
• for rated value of the current / with AC / in hot operating state / per pole	W	3.1
Electricity		
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	38
Current / with AC / Rated value	A	40
Appearance		

Color coding of the fuse link		black
-------------------------------	--	-------

Mechanical Design

mounting position		Any, preferably vertical
Net weight	g	13.4

Environmental conditions

Ambient temperature		
• minimum	°C	-5
• maximum	°C	40

General Product Approval



Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[other](#)

other

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SE2340>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE2340/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2340

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

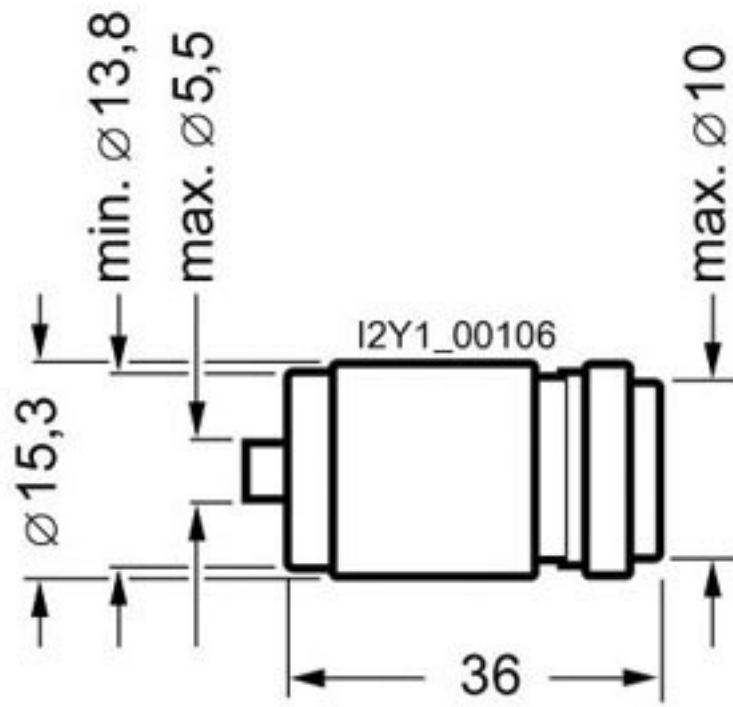

last modified:

05.05.2015