


Dual Battery lead

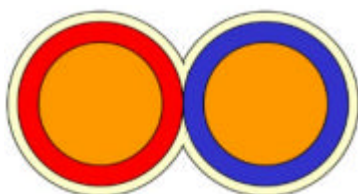

Type: **SKUB 2X35 Battransp**
 Article: **2261**

35 mm², extra flexible, Conductor acc. to IEC 60228,6		
Properties	Nominal value	Unit
Wires in conductor, bare	1029	Pcs.
Wire diameter	0,20	mm
Resistance, .max	0,554	Ω/Km
Copper weight	2*336	Kg/km

Insulation of 35 mm² acc. to HD21.3		
Properties	Nominal value	Unit
Material	PVC 70°C	-
Temperature range	-25 to +70	°C
Flame properties	Pass IEC 60332-1	
Wall thickness	1,40	mm
Outer diameter	10,8	mm
Colour	Customer's choice	

Outer sheet acc. to HD 603 S1, Crystal		
Properties	Nominal value	Unit
Material	Soft PVC 70°C	-
Temperature range	-35 to +70	°C
RoHS directive 2002/95/EC	Pass	
Flame properties	Pass IEC 60332-1	
Wall thickness	1,2	mm
Outer dimension W*H	27*13,5	mm
Colour	Transparent	