


## Dual Battery lead

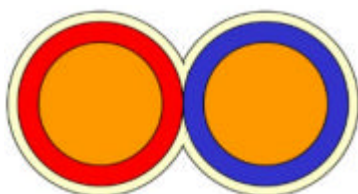

Type: **SKUB 2X6 Battransp**  
 Article: **2296**

<b>6 mm<sup>2</sup>, extra flexible, Conductor acc. to IEC 60228,6</b>		
<b>Properties</b>	<b>Nominal value</b>	<b>Unit</b>
Wires in conductor, bare	190	Pcs.
Wire diameter	0,20	mm
Resistance, .max	3,300	Ω/Km
Copper weight	2*57,6	Kg/km

<b>Insulation of 6 mm<sup>2</sup> acc. to HD21.3</b>		
<b>Properties</b>	<b>Nominal value</b>	<b>Unit</b>
Material	PVC 70°C	-
Temperature range	-25 to +70	°C
Flame properties	Pass IEC 60332-1	
Wall thickness	1,0	mm
Outer diameter	5,3	mm
Colour	Customer's choice	

<b>Outer sheet acc. to HD 603 S1, Crystal</b>		
<b>Properties</b>	<b>Nominal value</b>	<b>Unit</b>
Material	Soft PVC 70°C	-
Temperature range	-35 to +70	°C
RoHS directive 2002/95/EC	Pass	
Flame properties	Pass IEC 60332-1	
Wall thickness	1,0	mm
Outer dimension W*H	14,6*7,3	mm
Colour	Transparent	