


SLK425-L SLK425-L/N

Hoch flexible Messleitungen, beidseitig mit axialem Ø 4 mm-Lamellenstecker mit starrer Isolierhülse.

SLK425-L SLK425-L/N

Highly flexible test leads with in-line Ø 4 mm Multilam plug with rigid insulating sleeve on both ends.

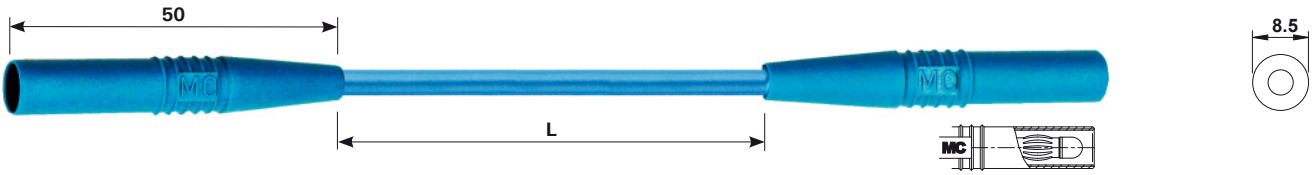


Typ Type	Bestell-Nr. Order No.	Bemessungsspannung/-strom Rated voltage/current	Leitungsquerschnitt Lead cross section		Längen L [cm] Lead lengths L [cm]	*Farben *Colours
SLK425-L	28.0103- □*	1000 V, CAT II / 32 A	2,5 mm ²	Au PVC CE	025 050 075 100 150 200	21 22 23 24 25 27
SLK425-L/N	49.0105- □*	1000 V, CAT II / 32 A	2,5 mm ²	Ni PVC CE	025 050 075 100 150 200	21 22 23 24 25 27

XKF-402

Hoch flexible Verlängerungsleitung. Eine Seite Ø 4 mm-Lamellenstecker mit starrer Isolierhülse, andere Seite starre Ø 4 mm-Buchse mit starrer Isolierhülse.

XKF-402

Highly flexible extension lead. One end with Ø 4 mm Multilam plug with rigid insulating sleeve, the other end with Ø 4 mm rigid socket with rigid insulating sleeve.

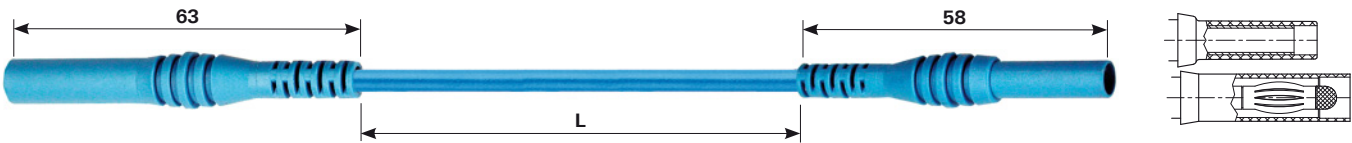

Typ Type	Bestell-Nr. Order No.	Bemessungsspannung/-strom Rated voltage/current	Leitungsquerschnitt Lead cross section		Längen L [cm] Lead lengths L [cm]	*Farben *Colours
XKF-402	66.9659- □*	1000 V, CAT II / 15 A	0,75 mm ²	Ni PVC CE UL	050 100 150 200	21 22 23

Beilegezzettel **RZ030**
www.multi-contact.com

RZ Sheet **RZ030**
www.multi-contact.com

