


LED Spacers


- temperature resistance of approx. 140°C
- material: PC-GV (polycarbonat) grey
- RoHS compliant

LED spacer \varnothing 3mm / \varnothing 5mm




5mm LED Spacers

Length (mm)	Part No.
3.0	546.71.03
4.0	546.71.04
5.0	546.71.05
6.0	546.71.06
7.0	546.71.07
8.0	546.71.08
9.0	546.71.09
10.0	546.71.10
11.0	546.71.11
12.0	546.71.12
13.0	546.71.13
14.0	546.71.14
15.0	546.71.15
16.0	546.71.16
17.0	546.71.17
18.0	546.71.18
19.0	546.71.19
20.0	546.71.20
21.0	546.71.21
22.0	546.71.22
23.0	546.71.23
24.0	546.71.24
25.0	546.71.25

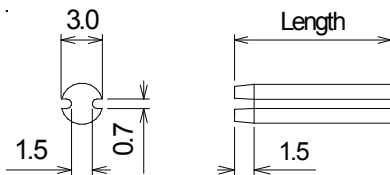

3mm LED Spacers

Length (mm)	Part No.
3.0	325.71.03
4.0	325.71.04
5.0	325.71.05
6.0	325.71.06
7.0	325.71.07
8.0	325.71.08
9.0	325.71.09
10.0	325.71.10
11.0	325.71.11
12.0	325.71.12
13.0	325.71.13
14.0	325.71.14
15.0	325.71.15
16.0	325.71.16
17.0	325.71.17
18.0	325.71.18
19.0	325.71.19
20.0	325.71.20
21.0	325.71.21
22.0	325.71.22
23.0	325.71.23
24.0	325.71.24
25.0	325.71.25



1. All dimensions are in millimetres
2. Tolerance is ± 0.1 mm unless otherwise specified
3. Specifications are subject to change without notice