

SVPD Series

Guaranteed at 125°C

Rated 35V max.

85°C×85% guaranteed, Rated 35V

The SVQP series guaranteed 125°C high voltage resistance was improved to a rated maximum of 35V. This product is very reliable, guaranteeing 85°C×85% performance. Suitable for use in smoothing circuits of vehicle-mounted equipment, industrial equipment, etc. This product can support lead free-reflow. (※2).



Specifications


Items	Conditions	Characteristics		
Category temperature range	—	-55°C to +125°C		
Tolerance on rated capacitance	120Hz	M : ±20%		
Tangent of loss angle	120Hz	Less than or equal to the value of Table3		
Leakage current ※1	After 2 minutes	Less than or equal to the value of Table3		
ESR	100KHz to 300KHz	Less than or equal to the value of Table3		
Characteristics of impedance ratio at high temp. and low temp.	Based the value at 100KHz, +20°C	-55°C	Z / Z 20°C	0.75 to 1.25
		+125°C	Z / Z 20°C	0.75 to 1.25
Endurance	125°C, 2,000h, Rated voltage applied	ΔC/C	Within ±20%	
		tanδ	2 times or less than an initial standard	
		ESR	2 times or less than an initial standard	
		Leakage current	Below an initial standard	
Damp heat (Steady state)	85°C, 85 to 90% RH, 1,000h, Rated voltage applied	ΔC/C	Within ±20%	
		tanδ	2 times or less than an initial standard	
		ESR	2 times or less than an initial standard	
		Leakage current	Below an initial standard	
Resistance to soldering heat ※2	VPS (230°C X 75s)	ΔC/C	Within ±10%	
		tanδ	1.3 times or less than an initial standard	
		ESR	1.3 times or less than an initial standard	
		Leakage current	Below an initial standard (after voltage processing)	

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 125°C.

※2 Refer to Page 14 for reflow soldering conditions.

Marking and dimensions

(unit : mm)

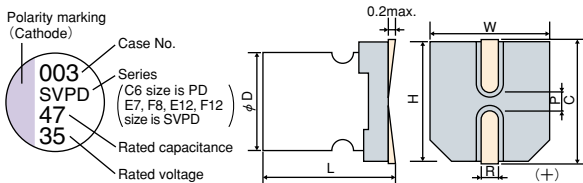

Size Code	φD±0.5	L +0.1 -0.4	W±0.2	H±0.2	C±0.2	R	P±0.2
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

Size List

RV : Rated voltage
(SV) : Surge voltage (125°C)

μF	RV (SV)	10.0 (12)	16.0 (18.4)	25.0 (29.0)	35.0 (40.0)
8.2					E7
10				C6	
18					F8
22				E7	E12
39				F8	
47				E12	F12
56		C6			
82			E7	F12	

※For the minimum packing quantity, please refer to page 57.

■Table3 SVPD Series Characteristics List


Size Code	Part Number	Rated voltage (V)	Rated capacitance (μF)	ESR 100kHz to 300kHz (mΩ) (max.)	Rated ripple current	Allowable ripple current	Tangent of loss angle (max.)	Leakage current (μA) (max.)※1
					100kHz (mArms) ※2			
					105°C < Tx ≤ 125°C	Tx ≤ 105°C		
C6	25SVPD10M	25	10	65	474	1500	0.10	50
	10SVPD56M	10	56	45	538	1700	0.12	112
E7	35SVPD8R2M	35	8.2	70	400	1300	0.10	57
	25SVPD22M	25	22	48	580	1835	0.10	110
	16SVPD82M	16	82	40	670	2120	0.12	262
F8	35SVPD18M	35	18	60	550	1800	0.10	126
	25SVPD39M	25	39	45	664	2100	0.10	195
E12	35SVPD22M	35	22	50	700	2300	0.12	154
	25SVPD47M	25	47	30	943	2980	0.12	235
F12	35SVPD47M	35	47	30	1150	3650	0.12	329
	25SVPD82M	25	82	28	1202	3800	0.12	410

※1 After 2 minutes

※2 Tx : Ambient temperature

SVPD

■Recommended land pattern dimension of PWB



(unit : mm)

Size Code	a	b	c
C6	2.1	9.1	1.6
E7	2.8	11.1	1.9
F8	4.3	13.1	1.9
E12	2.8	11.1	1.9
F12	4.3	13.1	1.9

Frequency coefficient for ripple current

Frequency	120Hz ≤ f < 1kHz	1kHz ≤ f < 10kHz	10kHz ≤ f < 100kHz	100kHz ≤ f ≤ 500kHz
Coefficient	0.05	0.3	0.7	1