


Wire Terminal

T-1 3/4 Wire Terminal

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
1	OL-1783	2.5	.20	.20	C-2R	500
2	OL-2169	2.5	.35	.21	C-2R	10,000
3	OL-1738	2.7	.06	.04	C-2R	6,000
4	OL-6130	3.0	.04	.03	C-2R	10,000
5	OL-2171	4.5	.12	.045	C-2V	25,000
6	OL-2208	5.0	.015	.002	C-2V	25,000
7	OL-6029	5.0	.02	.02	C-2V	10,000
8	OL-6134	5.0	.03	.03	C-2R	16,000
9	OL-6062	5.0	.04	.025	C-2R	50,000
10	OL-805	5.0	.06	.03	C-2R	200,000
11	OL-806	5.0	.06	.05	C-2R	100,000
12	OL-6083	5.0	.06	.15	C-2R	5,000
13	OL-6232	5.0	.075	.09	C-2R	40,000
14	OL-807	5.0	.115	.15	C-2R	40,000
15	OL-1083	5.0	.22	.60	C-2R	500
16	OL-1730	6.0	.04	.04	C-2V	10,000
17	OL-6225	6.0	.06	.13	C-2R	3,000
18	OL-1784	6.0	.20	.34@5V	C-2R	1,000
19	OL-2180	6.3	.04	.03	C-2V	50,000
20	OL-1739	6.3	.075	.23	C-2R	1,000
21	OL-6048	6.3	.15	.45	C-2R	3,000
22	OL-2181	6.3	.20	.40	C-2F	50,000
23	OL-2112	6.3	.20	.55	C-2R	5,000
24	OL-1869	10.0	.014	.004	C-2F	50,000
25	OL-6066	10.0	.027	.10	C-2V	3,000
26	OL-2107	10.0	.04	.08	C-2F	5,000
27	OL-2174	12.0	.04	.12	C-2F	10,000
28	OL-6037	12.0	.06	.15	C-2F	16,000

Lamp Design Characteristics

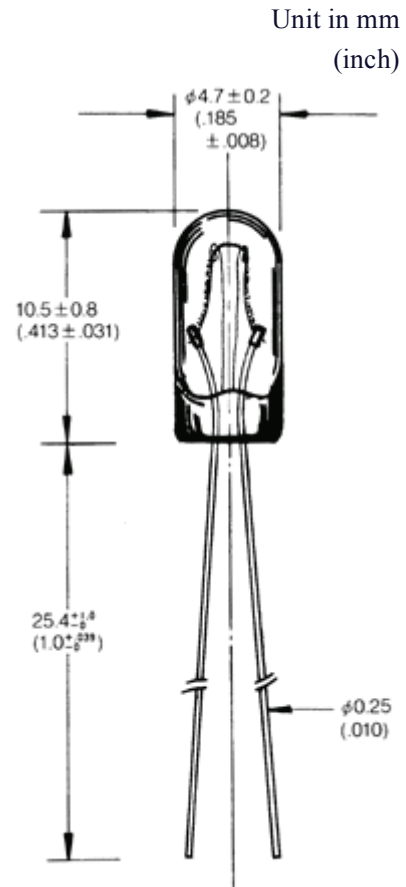



29	OL-2182	14.0	.08	.30	C-2F	50,000
30	OL-1705	14.0	.08	.50	C-2F	1,500
31	OL-1705L	14.0	.088	.50	C-2F	4,000
32	OL-2162	14.0	.10	.50	C-2F	10,000
33	OL-6002	15.0	.037	.075	C-2F	50,000
34	OL-2102	18.0	.04	.15	C-2F	10,000
35	OL-425	22.0	.04	.30	C-2F	2,000
36	OL-6004	24.0	.05	.50	C-2F	1,000
37	OL-6033	28.0	.024	.15	C-2F	5,000
38	OL-2185	28.0	.04	.20	C-2F	25,000
39	OL-2187	28.0	.04	.30	C-2F	7,000
40	OL-1764	28.0	.04	.34	C-2F	4,000
41	OL-1764LSV	28.0	.06	.34	C-2F	25,000
42	OL-361	28.0	.06	.60	C-2F	5,000
43	OL-6435	28.0	.065	.65	C-2F	10,000
44	OL-6234	32.0	.033	.34	C-2F	10,000

Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.



Groupe OSHINO



OSHINO LAMPS FRANCE
 Téléport 4 - ZT Pyrène Aéro Pôle - 65290 JUILLAN
 Tél: +33 (0)5 62 32 63 63 / Fax: +33 (0)5 62 32 63 65
 Email: info@oshino-lamps.fr / Site: www.oshino-lamps.com



FRANCE
200310775