

Digital universal time switches - tactic 372.1 plus

Item No 03.62.0002.1 / EAN Code 4010940038014



PRODUCT DESCRIPTION

APPLICATIONS

- ▶ Machinery control
- ▶ Heating systems control
- ▶ Devices, motors and pumps control

TECHNICAL DATA

Electrical Data	
Supply voltage	AC 230 V \pm 10% 50-60 Hz
Current output	Changeover, potential free
Current capacity - ohmic load	16 A / 250 V AC
Current capacity - inductive load cos.phi 0.6	2,5 A / 250 V AC
Switching capacity - minimal	100 mA / 20 V AC/DC
Load incandescent bulb	500 W
Current capacity - DC	1,3 A / 24 V DC
	0,7 A / 60 V DC
	0,3 A / 100 V DC
Power consumption	4,4 VA
Accuracy	\pm 1 Second /Day at 20°C
Power reserve	3 years
Operating specifications	
Manual switch	Automatic mode
	Fix ON/OFF
Channels	2
Program	Set individual days or weekday block formation
	Menu programming with free and fixed programs
	Daily program (ON/OFF)
	Weekly program (ON/OFF)
Memory lspaces	20
Display and format	
Time format	12-hour format (AM/PM)
	24-hour format
Shortest switching time	ON/OFF 1 minute
Summer/winter time	Manual summer/winter time change
Clock	Digital
Status indicator	Switch position display
Operating conditions	

Temperature (operation)	-10° C ... +55° C
-------------------------	-------------------

General specifications

Colour	Gray
Weight	190
Dimension	###
	###
	72 x 72 x 61 mm (H x B x T)
	42 mm (T) mounting depth


Compliance with standards

Approval mark	CE
Standards and guidelines	EN 60730-1
	EN 60730-2-7

Scope of delivery

Housing	Glass
	Terminal cover 2-channel
	Catch frame 2-channel
	Base 2-channel

DIMENSIONAL DRAWINGS

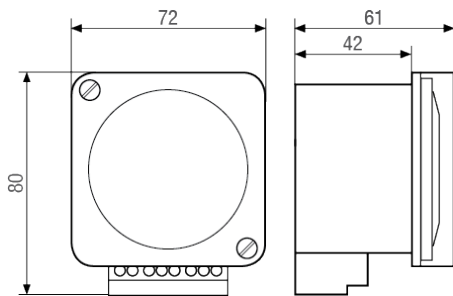

CIRCUIT DIAGRAMS

