

## EPIC® H-A 3 AGS

Innovative metal and plastic housing design  
Housing in plastic or metal version. For power supply in the smallest possible space



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Lightweight chemically resistant plastic housing

### Application range

Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

### Product features

Panel-mount base  
1 lever  
Angled version  
Included: flat gasket

### Technical Data

Material:

Housing: powder-coated zinc die-casting, grey  
Lever: zinc-plated steel  
Sealing: NBR  
Housing: grey thermoplastic, black  
Lever: zinc-plated steel  
Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:


-40°C to +100°C, short-term up to +125°C

VDE-tested:

Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

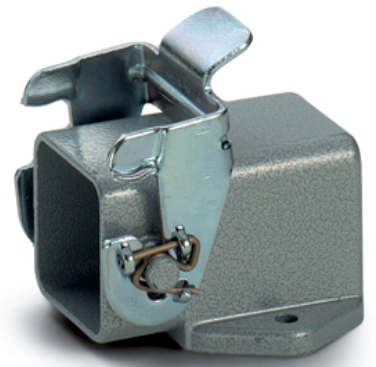

### Note

Photographs are not to scale and do not represent detailed images of the respective products.



**EPIC® H-A 3 AGS**

Part number	Article description	Colour	Material
H-A housing: panel-mount base (angled)			
10423500	H-A 3 Mags	grey	Zinc die-casting
10423100	H-A 3 Ags	black	Thermoplastic
10423000	H-A 3 Ags	grey	Thermoplastic

**EPIC® H-A 3 AGS**

