
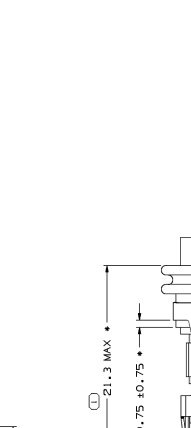
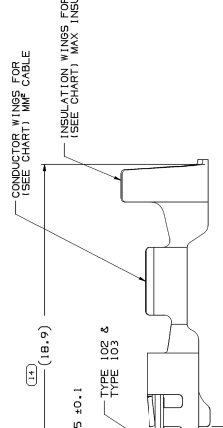


DATE	REV	SYMBOLS	DESCRIPTION	DRAWING NO.	REV	REV	REV	
							DATE	REV
		MISSING SYMBOLS	NO MISSING SYMBOL		20			
		TOTAL NO. OF INSPECTIONS REQUIRED						
		LAST NO. USED		19				
SYMBOL DEFINITION								
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.								
REV								
01	AP	0.35 X 27.38	0.35 ± 0.5	21.1	1.65	1.2	10.1	2.1
02	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
03	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
04	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
05	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
06	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
07	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
08	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
09	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
10	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
11	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
12	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
13	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
14	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
15	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1
16	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1

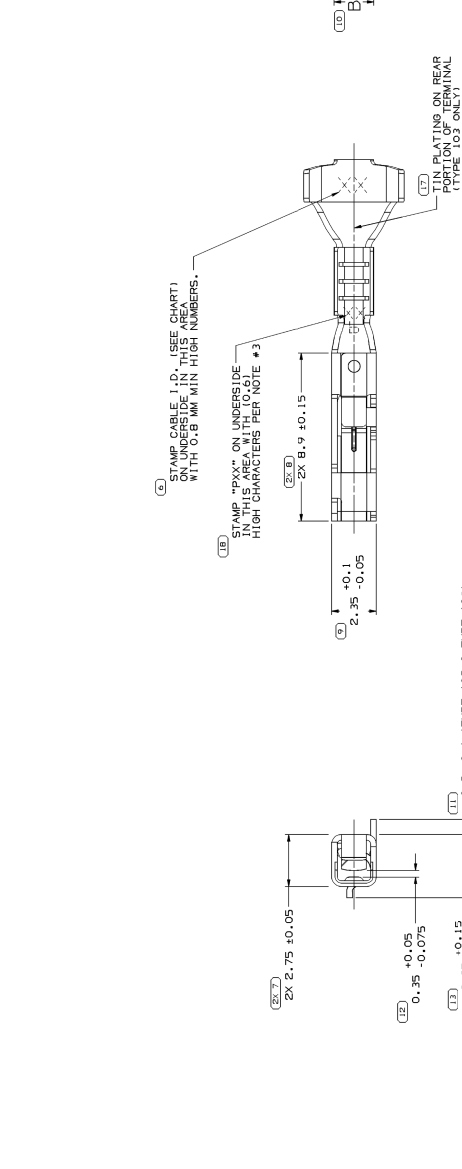

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- ** ** DENOTES DIMENSIONS MADE AT CUT-OFF AND CRIMP DIE.
- "PAX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE SERIES NUMBER (P01, P02, P03, ETC.) STAMP MAY BE IN ANY CONFIGURATION. (0.6) HIGH TRIANGULAR CONFIGURATION IS PREFERRED.
- REFERENCE MATING COMPONENTS OR EQUIVALENT: TERMINAL - 15304701
- DO NOT BRASS TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING GRAY MOVING PART) OF THE TERMINAL. SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.
- PLATING TYPE:
 I. RELEUM TIN 1.0 ± 0.2 MICROMETERS THICK WITH A COPPER UNDERLAY.
 II. MATE TIN ELECTROPLATE 1.0 ± 0.2 MICROMETERS THICK.
 III. 1.27 MICROMETERS (0.05 IN) GOLD-PALLADIUM/SILVER ALLOY.
 IV. NICKEL OVER 1.27 MICROMETERS THICK NICKEL UNDERLAY.
 PLATING REQUIREMENTS FOR CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.

PLATED	PART NO	REV IN/P	PREFERRED MAT'L	SIZE	(MM)	ID	O/A	TYPE	B,act	APPLICATION	OR EQUIVALENT	TYPICAL SEALING CAVITY CONFIG	RESTRICTED USAGE	REPLACED BY	POINTING TYPE	MAXIMUM TYPICAL USE	(SEE NOTE 6)
	15454820	01	AP	0.3 X 27.38	0.35 ± 0.5	21.1	1.65	1.2	10.1	2.1	SEALED (1150MP)	SEE TAXI 12010295	RESTRICTED				
	15454821	01	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1	SEALED (101)	SEE TAXI 12010295	RESTRICTED				
	15454822	01	AP	0.3 X 27.38	0.35 ± 0.5	15.1	1.45	1.2	10.1	2.1	SEALED (101)	SEE TAXI 12010295	RESTRICTED				
	15454823	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (150MP)	SEE TAXI 12010295	RESTRICTED				
	15454824	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (150MP)	SEE TAXI 12010295	RESTRICTED				
	12191819	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (GT)	SEE TAXI 12010295	RESTRICTED				
	12191820	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (GT)	SEE TAXI 12010295	RESTRICTED				
	12191821	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (GT)	SEE TAXI 12010295	RESTRICTED				
	12191822	01	AP	0.3 X 27.38	0.35 ± 0.5	17.1	2.25	1.2	10.2	2.1	SEALED (GT)	SEE TAXI 12010295	RESTRICTED				

APPROVED FOR ISSUE: _____ DATE: _____

DESIGNED BY: _____ DATE: _____

DRAWN BY: _____ DATE: _____

CHECKED BY: _____ DATE: _____

UNIT: TAXI TERM F 01 150

REVISED BY: _____ DATE: _____

12191815

10111 OF 15 R 21

