

MVP12, 4xM12, 5pole, M23 19pol. con. connector exit frontside

4-way, 5-pole
M23 plug connection
19-pole used

Image



Approvals





Contact layout

Contact 1	(+)	
Contact 2	(N/C)/(S2)	
Contact 3	(-)	
Contact 4	(N/O)/(S1)	
Contact 5	(Earth)	
LED display	LED (green): Power	LED (yellow): Signal (S1/S2)


Technical Data	
Operating voltage	24 V DC
Operating current per contact (40 °C)	max. 4 A
Signal per port	2
Total current	max. 10 A
Housing	Plastic, flame retardant
Protection	IP65, IP67
Temperature range	-20...+80 °C
Technical data M12 port	
Locking of ports	Screw thread M12 × 1 mm
Commercial data	
Gross weight	102
Net weight	102
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1
Accessories	
	Art.-No.
M12 plastic lock screw	58627
Label plate for use with MVP 17X9mm, white, 2 sets=12 pieces.	996050
Coding element PU 6 for use with MVP12 / MVP8 - plug. clamps	996054
adaptor M12 male/ M8 female 3p., seizure 1,3,4	7000-42201-000000
Comments	
Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.	

Contact layout

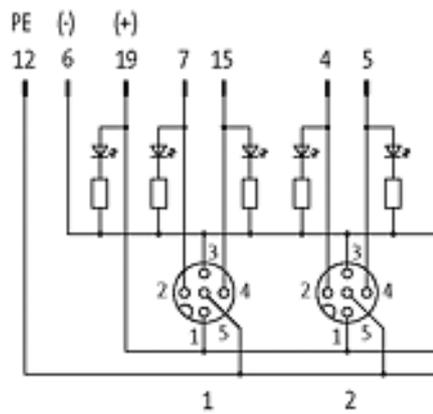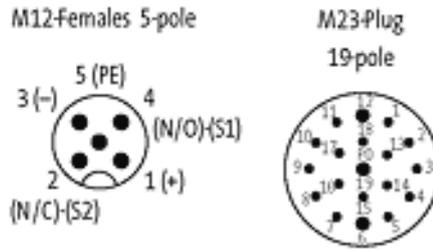


for 2 signals per port

Circuit diagram

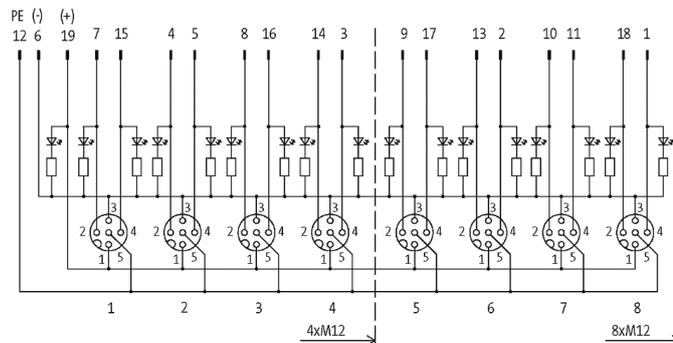

Dimension drawing

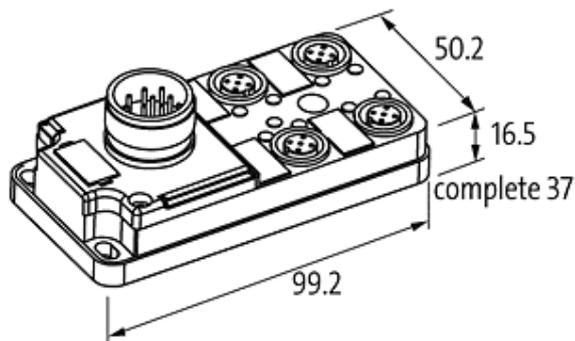

De-rating curve

