

31

3111 01 G




Minimodul™ connectors, pitch 2.5 mm




Minimodul™ crimp contact, on reel

31

3111 01 G

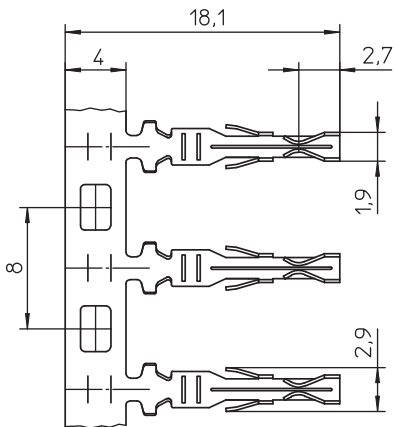

\*a



\*b

#### Environmental conditions

Temperature range -25 °C/+100 °C

#### Materials

Contact spring CuSn, tin-plated  
other finishings on request

#### Mechanical data

Insertion force/contact ≤ 4.0 N  
Withdrawal force/contact ≥ 0.5 N  
Retaining force contact in insulating body ≥ 50 N  
Further data see suitable connector housing

#### Connectable conductors for crimp area

Section 

>0.10–0.25 mm <sup>2</sup>
----------------------------

  
Insulation diameter 2.1 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance ≤ 5 mΩ  
Rated current 5.0 A (T<sub>amb</sub> 30 °C)  
2.5 A (T<sub>amb</sub> 70 °C)  
Further data see suitable connector housing


#### Associated products

Accessories  
☞ 3114 ☞ 3823

Harnessing equipment  
☞ CA31-01 ☞ CAS31-01 ☞ CAW31-01  
☞ CM31-01 ☞ CMW31-01 ☞ CZB31-01

31

3111 01 G

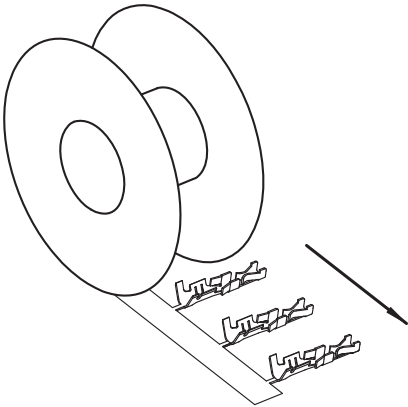

- \*a crimp at conductor
- \*b crimp at insulation

31

3111 01 G

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions			
				A (mm)	B (mm)	C (mm)	D (mm)
3111 01 G	1	14000	14000	1.5	1.7	2.2	2.0
3111 01 G500	1	500	5000	1.5	1.7	2.2	2.0

**Packaging:**  
on reel