


## EPIC® ULTRA H-B 24 AG QB

Housing H-B ULTRA: for higher functional reliability  
Optimum, low-resistance 360° screening  
All-purpose due to high corrosion resistance and high environmental protection.  
Space-saving due to compact dimensions  
Faster than any other comparable system  
High mechanical resistance



Good chemical resistance

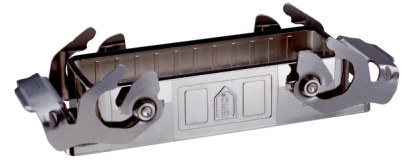

Wide clamping range



Assembly time



Optimum strain relief



Space requirement



Robust



Integrated SKINTOP® cable gland



Connector with standard housing unit



Interference signals



Waterproof

### Info

EMC protection  
Corrosion-resistant

### Application range

In EMC-sensitive environments  
For fixed and flexible applications (e.g. machinery building, wind turbines)  
Construction machinery  
Electric motor manufacturing

### Product features

Housings with the BRUSH addition come with BRUSH cable screen contacting  
Pluggable with standard housings  
Corrosion-resistant according to DIN EN 6988  
Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2  
Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

**EPIC® ULTRA H-B 24 AG QB****Technical Data**

Material:	Housing: nickel-plated zinc die-casting Lever and bolts: stainless steel Sealing: NBR Cable gland Body: nickel-plated brass Insert: PA Seal: special elastomer
Protection rating:	IP 65
Temperature range:	-40°C to +100°C

**Note**

Photographs are not to scale and do not represent detailed images of the respective products.



**EPIC® ULTRA H-B 24 AG QB**

Part number	Article description
H-B housing: panel-mount base (double lever)	
70250222	ULTRA H-B 24 AG QB

**EPIC® ULTRA H-B 24 AG QB**

