

Data sheet | Item number: 870-402

Push-in type jumper bar; insulated; 2-way; Nominal current 18 A; light gray

www.wago.com/870-402



Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Geometrical Data

Width	9 mm / 0.354 inch
Depth	2.5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0.011 MJ
Weight	0.8 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918506458
Customs Tariff No.	85366990990

Downloads

Documentation

Additional Information

Technical explanations	03-Apr-2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 870-402	URL	Download
----------------------	-----	----------



CAE data

WSCAD Universe 870-402	Download
------------------------	----------

Subject to changes.

Installation Notes

Jumpered

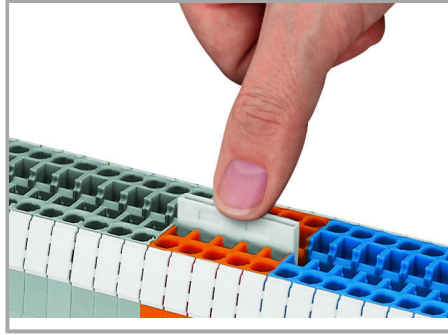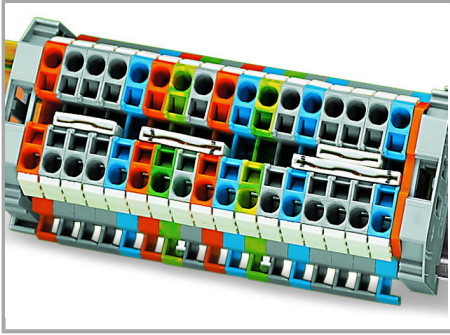

Commoning with push-in type jumper bars:

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Two parallel jumper slots are accommodated in one terminal block.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes.