



**A+**  
energy class

**75**  
lumens/watt


## Downlight Start Gen2


LED Downlight Start TU G2 3" 6W 840  
93110628

### Product information


Tungsräm introduces the range of Start Downlight Gen2. There are a selection of sizes and colour temperature options to meet customer requirements. The discrete pattern fits in every indoor environment while lightweight design allows quick and easy installation for new construction. The best choice for brightening up your property through the benefit of long lifetime.

**TUNGSRAM** 93110628  
LED Downlight Start  
TU G2 3" 6W 840

 This luminaire contains built-in LED lamps.

 **L  
E  
D**

The LED lamps cannot be changed in the luminaire

874/2012 

## Product data

DIALux description	TUNGSRAM - Downlight Start Gen2 - 450lm - 6W - 4000K - 80CRI - 93110628[SKU] - Recessed
Brand	TUNGSRAM
Mounting type	Recessed
Weight [kg]	0.067
Body color	White
Product dimensions (Length) x (Width) x (Height) [mm]	Ø92 x30mm
Certifications	CE

## Performance data

Rated efficacy [lm/W]	75
Rated life L70/B50 [h]	25000
IP Rating	20
Impact resistance (IK)	IK06
Energy efficiency class (EEC)	A+
Rated power [W]	6
Nominal lumens [lm]	450
Rated lumens [lm]	450
Ambient Temperature [°C]	+25°C

## Photometrical data

Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80
Nominal beam angle [°]	110°


## Electrical data

IEC protection class	Class II
Operating voltage [V]	220-240V
Nominal lamp power factor	> 0.5

## Logistic data

Box quantity	1
Shipment	Standard
Product status	Available

## Light distribution

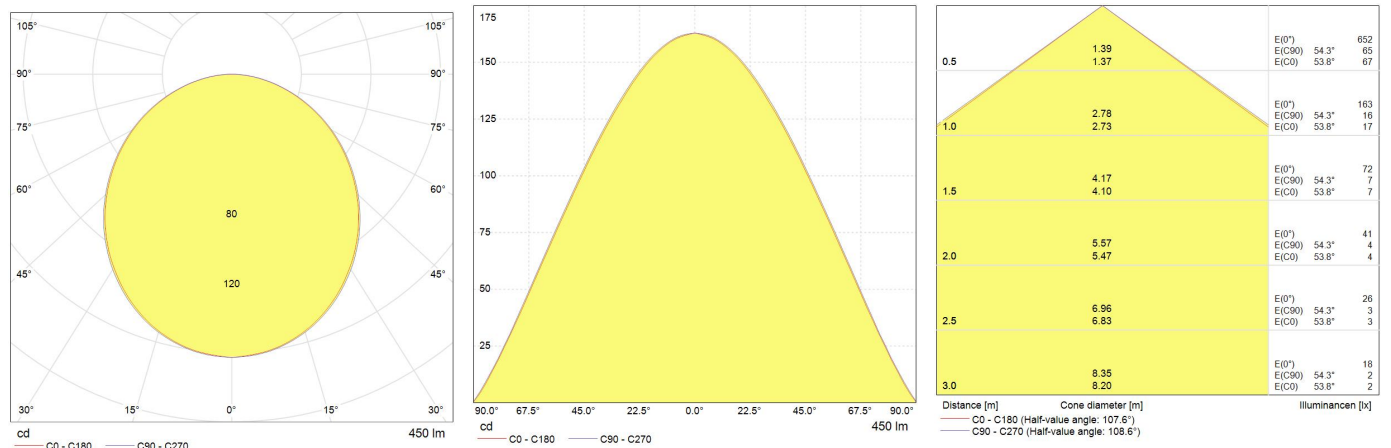

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[DoC Document \(PDF\)](#)

[Datasheet \(FR\) \(PDF\)](#)