


Specifications

Nominal Voltage [V]		4.8
Typical capacity [mAh]		2500
Size [mm]		According to the drawing
Typical charge [mA]		250 (15 hrs)
Standard continuous discharge current [mA]		2500 (temp. 20 °C)
Charge temperature	Typical	0 °C do 60 °C
Discharge temperature	Continous	-20 °C do 70 °C
Storage temperature	Recommended	-20 °C do 45 °C



Label: 50x30mm

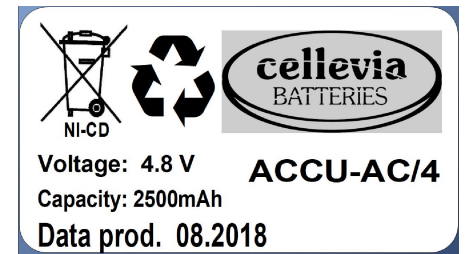

Material/ Materiał:		Scale/ Skala: 1:2	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie : _		Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:	J. Dadacz	2019-04-16				Revision symbol
Checked by/ Sprawdził:	P. Kuznia	2019-04-17				ERP system number:
Approved by/ Zatwierdził:	J. Zreda	2019-04-17				NDED.05.446.1A
Update/ Aktualizował:	J. Dadacz	Update/ Data aktualizacji: 2019-04-16	Date of implementation/ Data wykonania:	Product reference/ Nazwa: Ni-Cd BD-C2500H 4.80V 2.50Ah 4S 1P Ver: 1 A ACCU-AC/4	Docum. number/ Nr rysunku:	