

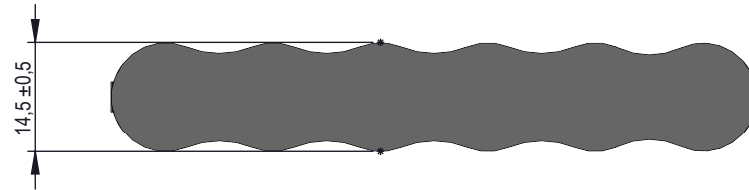



Specifications		
Nominal Voltage [V]	7,2	
Typical capacity [mAh]	1700	
Size [mm]	According to the drawing	
Typical charge [mA]	170(16 hrs)	
Standard continuous discharge current [mA]	340(temp. 20°C)	
Charge temperature	Typical	0°C do 45°C
Discharge temperature	Continous	-20°C do 65°C
Storage temperature	Recommended	-20°C do 45°C

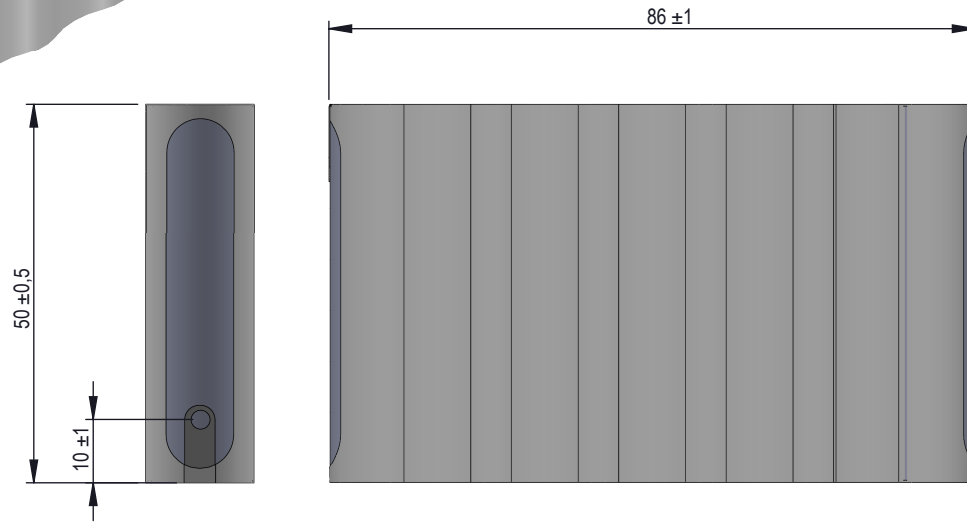

Label 50x30mm

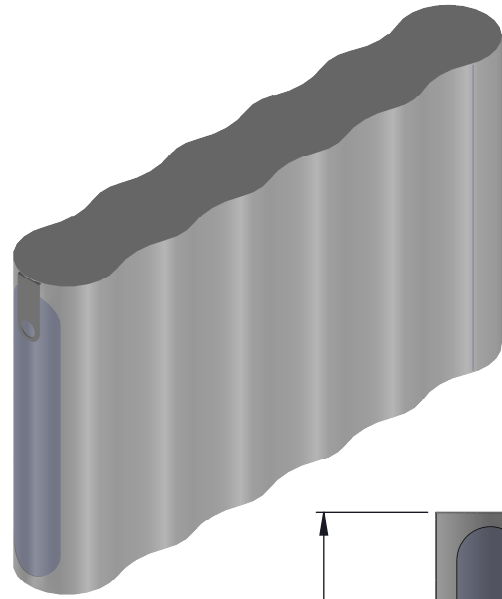

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie : _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number:
Checked by/ Sprawdził:					NDED.04.079.1A
Approved by/ Zatwierdził:					
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
J. Dadacz	2019-05-08	2016-11-08	ACCU-R6/6-B17 VHAA1700 7,20V 1,70Ah cylil		