


BN 388

Cross recessed flat countersunk head screws
Phillips H

DIN 965 A
~ISO 7046
~UNI 7688

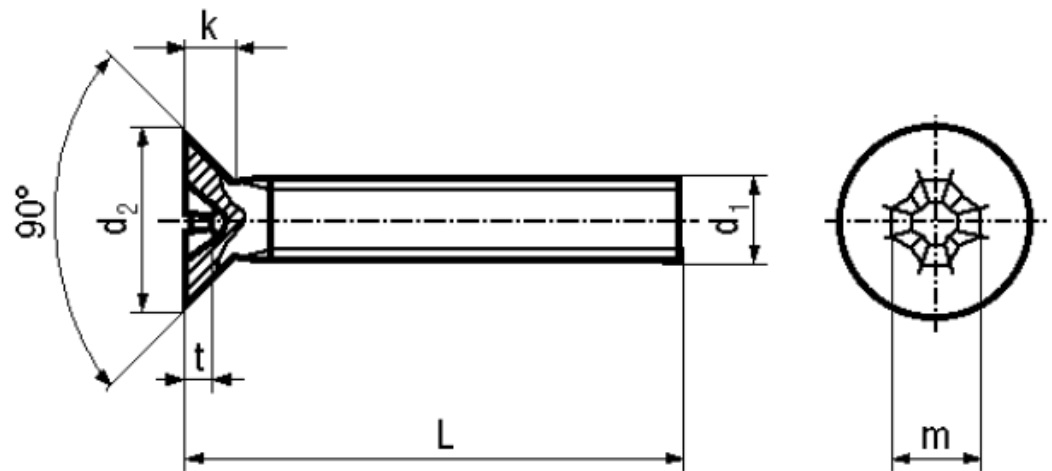

Material	Steel	Tensile strength	400 N/mm2
Surface	zinc plated blue	Elongation after fracture	min. 14%
Quality	4.8		

Article No. - 1156586

d ₁	(M3,5)
L	8
d ₂ max.	6,5
k max.	1,93
Phillips	2
m~	3,9
t min.	1,4
t max.	1,9

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.
All lengths fully threaded.
DIN 965 A Prozidriv cross recess (Type Z) see BN 3333