

## Data sheet Product BL 16 SMD 067 ...



PCB connectors>Female headers

for □ 0.635 mm and up to 0.85 mm Ø; ... packing (option) - additions:

**BL 16 SMD 067 ... B TR: 4-6 contacts, 500 pcs/reel**

**BL 16 SMD ... B TR: 6-40 contacts, 250 pcs/reel**

No capillary action when soldering due to protected contact insert. Separable!


Therefore any required number of contacts is available.

**Features**

grid:	<b>2.54 mm</b>
no. of contacts:	<b>4 / 6 / 8 / 10 / 12 / 14 / 16 / 18 / 20 / 22 / 24 / 26 / ... / 40</b>
contact material:	<b>CuZn-alloy</b>
contact sleeve:	<b>tin-plated</b>
surface contact / contact sleeve:	<b>Ni+4...6µm Sn</b>
contact spring:	<b>gold-plated</b>
inner contact spring material:	<b>CuBe-alloy</b>
inner contact spring surface:	<b>Ni+0,75µm Au</b>
type internal spring:	<b>6-fingers</b>
plugability for circuit points:	<ul style="list-style-type: none"> <li>• □0,55...0,65mm</li> <li>• Ø0,65...0,85mm</li> </ul>
insert depth:	<b>2.5...6mm</b>
insertion / drawing force:	<b>1.3N/0.3N</b>
shock resistance:	<b>50 g</b>
volume resistance:	<b>≤10 mΩ</b>
vibration resistance max.:	<b>15 g</b>
capacity between two adjacent contacts:	<b>≤ 0,3 pF</b>
nominal current:	<b>3 A</b>
nominal voltage:	<b>150 V DC</b>
test voltage:	<b>1500 V</b>
insulating body material:	<b>PA 4.6. GF</b>

temperature range:	<ul style="list-style-type: none"> <li>• -40°C... +163°C</li> <li>• (260°C/10 s)</li> </ul>
class of inflammability:	UL 94 V-0
version:	female header
specific insulation resistance:	$>10^7 \Omega \cdot m$
connection type:	SMD
reflow solderable:	yes
packing:	<ul style="list-style-type: none"> <li>• bar magazine</li> <li>• pick and place pad and bar magazine</li> <li>• pick and place pad and tape and reel</li> </ul>

## Technical Drawing

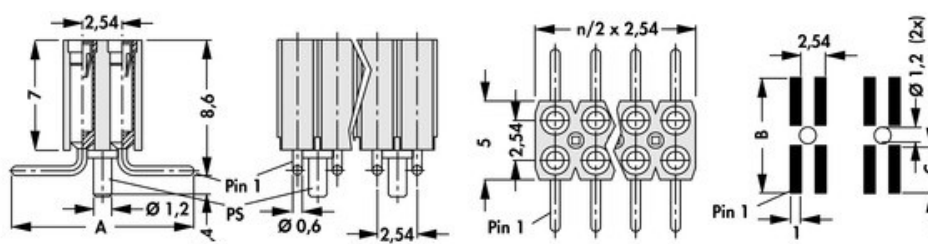

A: 6.7 mm

B: 7.5 mm

C: 2.5 mm

## Equipping

- reel diameter  $\varnothing 330$  mm

