

MAGNETIC TRANSDUCER

Customer	
Customer P/O	
BeStar Model Name	BMT1212H09
Product No.	010406
Issue No.	BS/TET01.016A
Issue Date	02/07/01

Approval :

- 1.Characteristic
- 2.Drawing
- 3.Reliability Test
- 4.Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park4/F,Site B ChangZhou New District
Tel:86-519-5103228
Fax:86-519-5131010
Http:www.be-star.com
E-Mail:bestarco@pub.cz.jsinfo.net

BMT1212H09




1. Characteristic

★ Electrical and Mechanical Characteristics

No.	Item	Specification
1.	Rated Voltage	12 V
2.	Operating Voltage	7...16V
3.	a) Rated Current	max 40mA
4.	Coil Resistance	140 ± 14ohm
5.	b) Coil Impedance	240ohm
6.	a) Sound Output at10cm	min 85 dB
7.	Resonance Frequency	2400 ± 200Hz
8.	Housing Material	NORYL
9.	Working Temperature	-40...+85 °C
10.	Storage Temperature	-40...+85 °C
	a) Value applying at rated voltage (2400Hz,1/2duty square wave)	
	b) Value applying at rated voltage (2400Hz,sine wave measuring current 60 μ A)	

★ Standard Output Measurement Setup

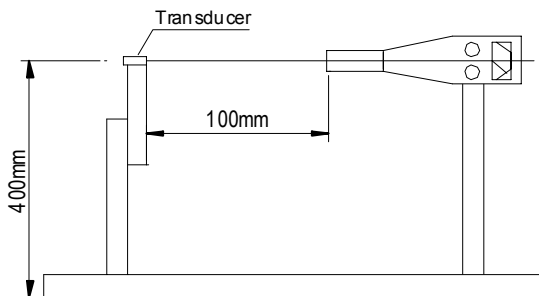

Standard Conditions

Temperature: 17~25°C
 Relative Humidity: 45~85 %(RH)
 Air Pressure: 860~1060hPa


DIS.		DATE		Page:1 of 4	BMT1212H09
CHEC.		DATE		3rd angle projection	Transducer
APPR.		DATE			
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No.010-406


BMT-1212H09

2. Drawing


Tolerance: ± 0.5

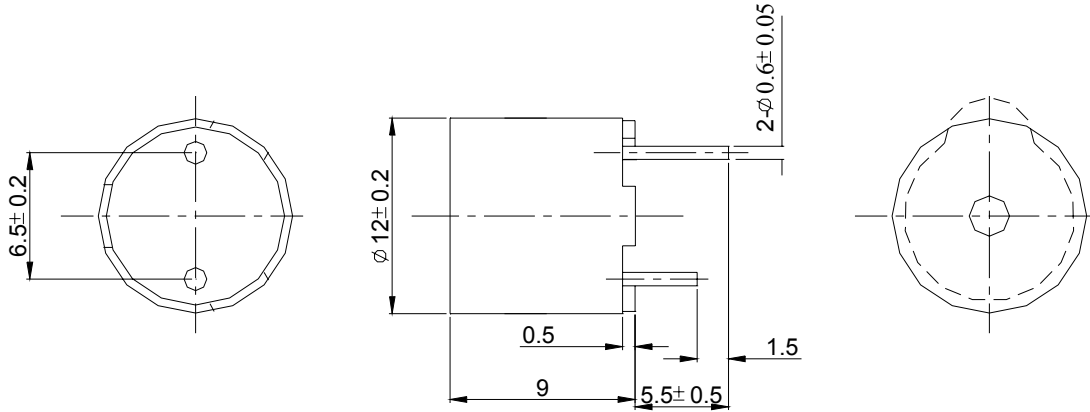

★Frequency Response

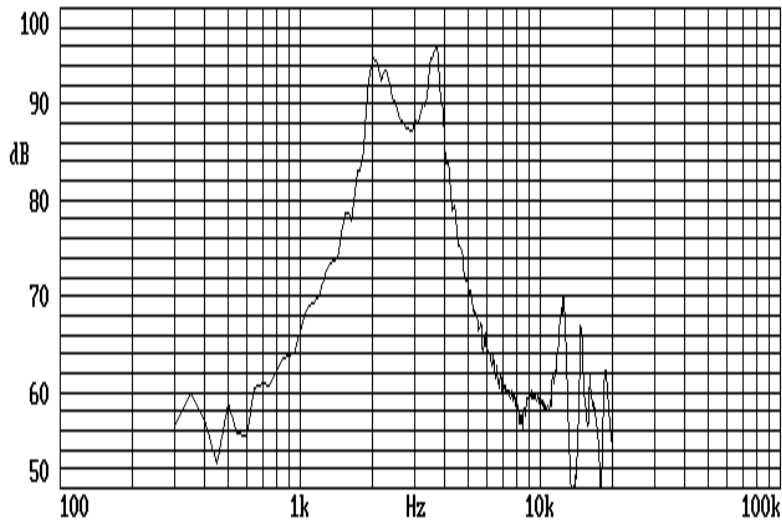


This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content. No010406

DIS.		DATE		Page:2 of 4	BMT-1212S Transducer
CHEC.		DATE		3rd angle projection	
APPR.		DATE			
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A


BMT1212H09

3. Reliability test

- 3.1 High temperature test
 - Temperature +85° C
 - Duration 96hrs
- 3.2 Low temperature test
 - Temperature -40° C
 - Duration 96hrs
- 3.3 Temperature cycle test
 - Cycles 5



- 3.4 Humidity cycle test
 - Cycles 10



all these tests above should be measured after leaving normal temperature for 2hrs.

- 3.5 Load test
 - Power supply rated voltage
 - Duration 1000hrs
- 3.6 Vibration Test
 - Vibration Frequency 10~55Hz
 - Amplitude 1.5mm
 - Duration x,y&z directions 30min
- 3.7 Drop test
 - Height 70cm
 - (to 10mm thickness woodenboard)
 - Direction 3
- 3.8 Solderability test
 - Solderability temperature 255° C
 - Heat applying time 3sec



Notice: After the test the part shall meet specifications without any degraance and performance except S.P.L, S.P.L shall be 77dB more .

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No010406

DIS.		DATE		Page:3 of 4 3rd angle projection	BMT1212H09
CHEC.		DATE			
APPR.		DATE			Transducer
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A

BMT1212H09

4. Packing

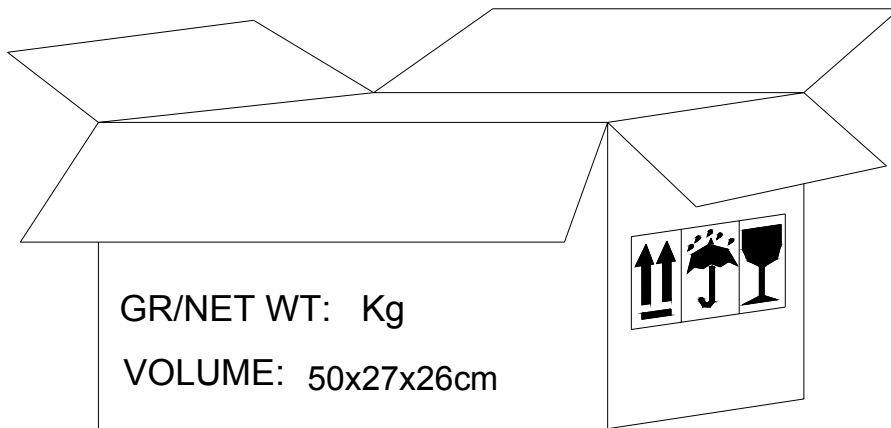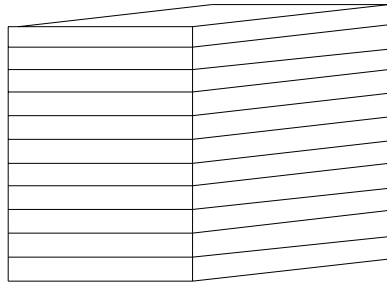

- 1)100pcs/tray
- 2)30tray/carton
- 3)3000 pcs/carton in total
- 4)carton size 50x27x26cm

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No.010406

DIS.		DATE		Page:4 of 4 3rd angle projection	BMT1212H09
CHEC.		DATE			Transducer
APPR.		DATE			
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A