


SPAX®

BN 20545 - Hexalobular (6 Lobe) socket T-STAR plus flat countersunk head screws for timber construction, partially threaded with 4CUT point



Manufacturer

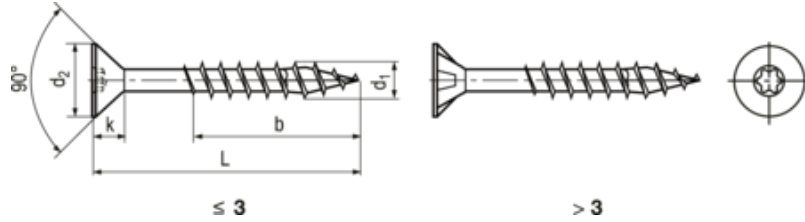

Product description

Other documentation: www.spax.com

Additional information

The WIROX® coating is an alternative chromium free (VI) surface coating with considerably higher corrosion protection compared to yellow electrogalvanizing.

Headform

Countersunk

Drive

Hexalobular socket

Thread

partially threaded

Brand

SPAX®

Material

Steel

Material execution

case-hardened

Surface

WIROX® added lubricant

Version

with 4CUT point

Certificates



Warnings

ISO 4042

Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!

Further notice to residual risks can be found in the introduction section.

4CUT cutter for screw lengths of 160 mm and over

Article no	d1	L	d2	k max	Hexalobular socket	b
------------	----	---	----	-------	--------------------	---

Article no	d1	L	d2	k max	Hexalobular socket	b
3576838	8	80	15.1	4.4	T40	47
3576839	8	100	15.1	4.4	T40	57
3576840	8	120	15.1	4.4	T40	70
3576841	8	140	15.1	4.4	T40	80
3576842	8	160	15.1	4.4	T40	80
3576843	8	180	15.1	4.4	T40	80
3576844	8	200	15.1	4.4	T40	80
3576845	8	220	15.1	4.4	T40	80
3576846	8	240	15.1	4.4	T40	80
3576847	8	260	15.1	4.4	T40	80
3576848	8	280	15.1	4.4	T40	80
3576849	8	300	15.1	4.4	T40	80
3576850	8	320	15.1	4.4	T40	80
3576852	8	340	15.1	4.4	T40	80
3576853	8	360	15.1	4.4	T40	80
3576854	8	380	15.1	4.4	T40	80
3576855	8	400	15.1	4.4	T40	80
3576856	8	450	15.1	4.4	T40	80
3792606	10	80	18.6	5.4	T50	50
3792609	10	100	18.6	5.4	T50	60
3792610	10	120	18.6	5.4	T50	70
3792611	10	140	18.6	5.4	T50	80
3792612	10	160	18.6	5.4	T50	80
3792613	10	180	18.6	5.4	T50	80
3792614	10	200	18.6	5.4	T50	80
3792615	10	220	18.6	5.4	T50	80
3792617	10	240	18.6	5.4	T50	80
3792618	10	260	18.6	5.4	T50	80
3792619	10	280	18.6	5.4	T50	80
3792620	10	300	18.6	5.4	T50	80
3792621	10	320	18.6	5.4	T50	80
3792622	10	340	18.6	5.4	T50	80
3792623	10	360	18.6	5.4	T50	80
3792624	10	380	18.6	5.4	T50	80
3792625	10	400	18.6	5.4	T50	80
3792626	10	450	18.6	5.4	T50	80