


## Hexalobular (6 Lobe) socket flat countersunk head chipboard screws fully threaded

BN 20592

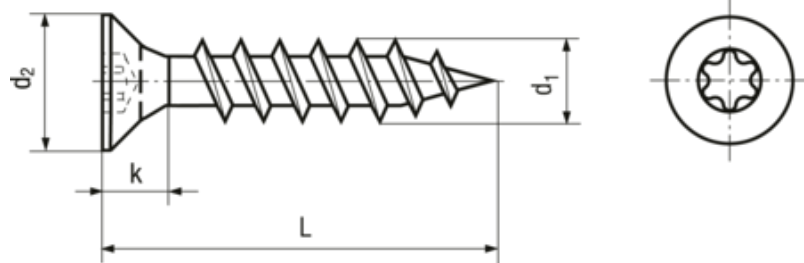

Headform	Countersunk
Drive	Hexalobular socket
Thread	fully threaded
Material	Steel
Material execution	case-hardened
Surface	zinc plated blue, added lubricant
Warnings	<p>ISO 4042</p> <p>Quenched and tempered fasteners <math>\geq 360</math> HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!</p> <p>Further notice to residual risks can be found in the introduction section.</p>

Article no	d1	L	d2 max	k~	Hexalobular socket
3588397	3	10	6	2.9	X10
3588398	3	12	6	2.9	X10
3588399	3	16	6	2.9	X10
3588401	3	20	6	2.9	X10
3588402	3	25	6	2.9	X10
3588403	3	30	6	2.9	X10
3588404	3	35	6	2.9	X10
3588405	3	40	6	2.9	X10
3588406	3.5	12	7	3.2	X15
3588408	3.5	16	7	3.2	X15
3588410	3.5	20	7	3.2	X15
3588411	3.5	25	7	3.2	X15
3588412	3.5	30	7	3.2	X15
3588413	3.5	35	7	3.2	X15

Article no	d1	L	d2 max	k~	Hexalobular socket
3588414	3.5	40	7	3.2	X15
3588415	3.5	45	7	3.2	X15
3588416	3.5	50	7	3.2	X15
3588417	4	16	8	3.9	X20
3588418	4	20	8	3.9	X20
3588419	4	25	8	3.9	X20
3588421	4	30	8	3.9	X20
3588422	4	35	8	3.9	X20
3588423	4	40	8	3.9	X20
3588424	4	45	8	3.9	X20
3588425	4	50	8	3.9	X20
3588426	4	60	8	3.9	X20
3588427	4.5	16	9	4.2	X20
3588428	4.5	20	9	4.2	X20
3588429	4.5	25	9	4.2	X20
3588430	4.5	30	9	4.2	X20
3588431	4.5	35	9	4.2	X20
3588432	4.5	40	9	4.2	X20
3588433	4.5	45	9	4.2	X20
3588435	4.5	50	9	4.2	X20
3588436	4.5	60	9	4.2	X20
3588437	5	20	10	4.7	X25
3588438	5	25	10	4.7	X25
3588439	5	30	10	4.7	X25
3588440	5	35	10	4.7	X25
3588441	5	40	10	4.7	X25
3588442	5	45	10	4.7	X25
3588443	5	50	10	4.7	X25
3588444	5	60	10	4.7	X25
3588445	5	70	10	4.7	X25
3588446	6	40	12	5.3	X25
3588447	6	45	12	5.3	X25
3588448	6	50	12	5.3	X25
3588449	6	60	12	5.3	X25
3588450	6	70	12	5.3	X25