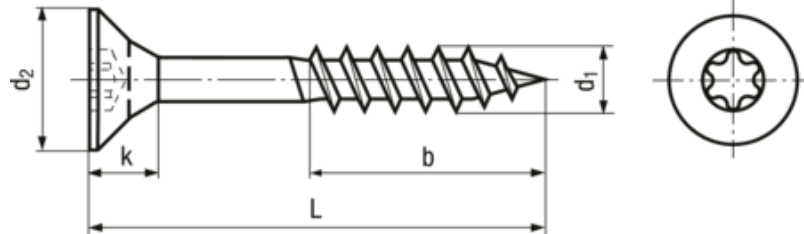


Hexalobular (6 Lobe) socket flat countersunk head chipboard screws partially threaded
BN 20593


Headform	Countersunk
Drive	Hexalobular socket
Thread	partially threaded
Material	Steel
Material execution	case-hardened
Surface	zinc plated blue, added lubricant
Warnings	<p>ISO 4042</p> <p>Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!</p> <p>Further notice to residual risks can be found in the introduction section.</p>

Article no	d1	L	d2 max	k~	Hexalobular socket	b
3588459	3	25	6	1.8	X10	16
3588460	3	30	6	1.8	X10	18
3588461	3	35	6	1.8	X10	21
3588462	3	40	6	1.8	X10	24
3588463	3	45	6	1.8	X10	27
3588465	3.5	35	7	2	X15	21
3588466	3.5	40	7	2	X15	24
3588467	3.5	45	7	2	X15	27
3588468	3.5	50	7	2	X15	30
3588470	4	30	8	2.3	X20	18
3588471	4	35	8	2.3	X20	21
3588472	4	40	8	2.3	X20	24
3588473	4	45	8	2.3	X20	27
3588474	4	50	8	2.3	X20	30

Article no	d1	L	d2 max	k~	Hexalobular socket	b
3588475	4	60	8	2.3	X20	36
3588476	4	70	8	2.3	X20	42
3588477	4	80	8	2.3	X20	48
3588478	4.5	30	9	2.5	X20	18
3588479	4.5	35	9	2.5	X20	21
3588481	4.5	45	9	2.5	X20	27
3588484	4.5	70	9	2.5	X20	42
3588485	4.5	80	9	2.5	X20	48
3588488	5	40	10	2.8	X25	24
3588490	5	50	10	2.8	X25	30
3588497	5	120	10	2.8	X25	72
3588498	6	50	12	3.3	X25	30
3588499	6	60	12	3.3	X25	36
3588500	6	70	12	3.3	X25	42
3588504	6	110	12	3.3	X25	72
3588506	6	130	12	3.3	X25	72
3588508	6	150	12	3.3	X25	72
3588509	6	160	12	3.3	X25	72
3588493	5	80	10	2.8	X25	48