




~DIN 934

~ISO 4032

Standard withdrawn

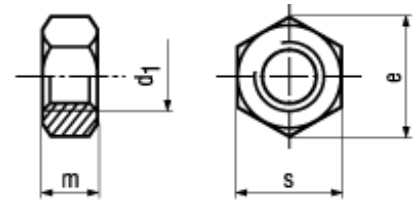

**BN 505**

**Hex nuts ~0,8d**

Brass

nickel plated

- ~UNI 5588
- ~ČSN 021401



M10; M12; M14: wrench size according to ISO on request

Article#	d <sub>1</sub>	e min.	s	m max.
1444751	M1	2,71	2,5	0,8
1195271	M1,4	3,28	3	1,2
1195298	M1,6	3,41	3,2	1,3
1195301	(M1,7)	4	3,5	1,4
1195336	M2	4,32	4	1,6
1195360	M2,5	5,45	5	2
1195387	M3	6,01	5,5	2,4
1195395	(M3,5)	6,58	6	2,8
1195409	M4	7,66	7	3,2
1195417	M5	8,79	8	4
1195425	M6	11,05	10	5
1195433	M8	14,38	13	6,5
1195441	M10	18,9	17	8
1195468	M12	21,1	19	10
1195476	(M14)	24,49	22	11
1195484	M16	26,75	24	13
1439944	(M18)	29,56	27	15
1439952	M20	32,95	30	16