





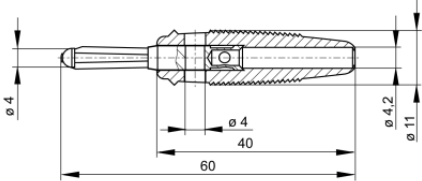


Plugs

BUELA 30 K



| Product | BUELA 30 K |
|---|---|
| description | Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead. Solder connection up to maximum cable cross-section of 2.5 mm ² . Nickel-plated brass contact material. |
| operating instruction | BA409 |
| article-no. / *colour | 9307271xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> <div style="text-align: center;"> 07 white</div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div> |
| drawing |  |
| technical data | |
| connection | solder connection |
| rated voltage ⁽¹⁾ | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O ⁽³⁾ |
| rated current ⁽¹⁾ (consider derating curve) | 30 A |
| material plug | brass, nickel plated |
| housing material | PVC-P |
| temperature range acc. To IEC61010 ⁽²⁾ | -25 °C to +70 °C |
| standard | IEC 61010 |

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 06.05.2019