


Product Sheet

Part Number: CNEM 24 T

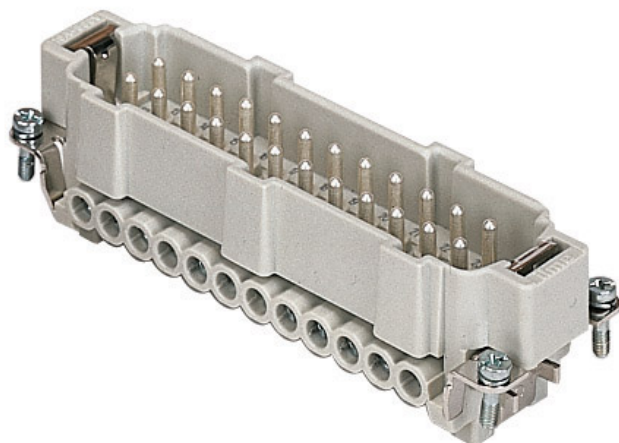

Family	inserts
Version	screw terminal connections
Series	CNE
Product type	with male contacts
Type	with plate
Model	male insert
Reference standard	EN 61984 (2001-11)
Contact type	silver plated
No. of poles	24 poles +
Voltage (V)	500V
Current (A)	16A (A.C./D.C.)
Wire section	0,5mm ² - 4mm ²
Awg size	20 - 12
IP degree of protection	IP20 degree of protection without enclosure; IP65, IP66, IP67, IP68 (EN 60529) and IP69K (DIN 40050 - 9) with enclosure

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.

Fixing centre distance size "104.27"


Impulse withstand voltage 6kV

Pollution degree 3

Barcode EAN13 8015747033305

Notes

- CNE ... : for non-prepared conductors
- inserts with plate for section conductors:
0.5 - 4 mm² - AWG 20 - 12
 - conductors stripping length: 7 mm
 - terminal screw torque: 0.5 Nm

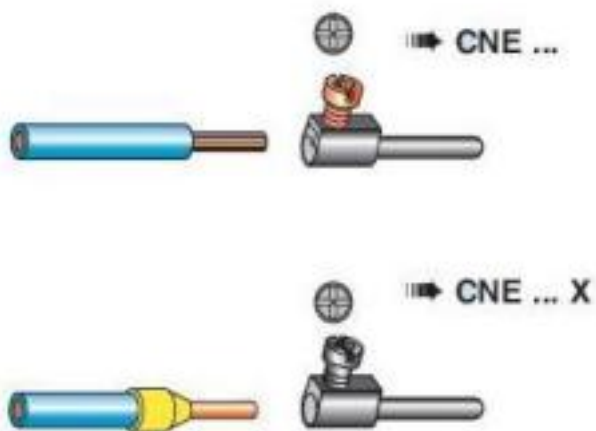

- CNE ... X : for conductors with bush terminal
- inserts without plate for section conductors:
0.25 - 2.5 mm² - AWG 24 - 14
 - conductors stripping length: 7 mm
 - terminal screw torque: 0.5 Nm

CNEF/M 24 T inserts:

- characteristics according to EN 61984:
(16A 500V 6kV 3)
(16A 400/690V 6kV 2)
- rated voltage according to UL/CSA: 600V
- insulation resistance: > 10 GOhm
- ambient temperature limit: -40 °C ... +125 °C
- are made of self-extinguishing thermoplastic resin UL 94 V0
- mechanical life: > 500 cycles
- contact resistance:

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.