


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Selection	
TYPE	Thread
D16B-SF-1L-M25	D1 D2
D16B-SF-1L-2M25	M25
D16B-SF-1L-PG21	M25 M25
D16B-SF-1L-2PG21	PG21 PG21

Selection	
TYPE	Thread
D16B-SF-1L-M25	D1 D2
D16B-SF-1L-2M25	M25
D16B-SF-1L-PG21	M25 M25
D16B-SF-1L-2PG21	PG21 PG21

Housings Feature
 01.Material: aluminium die-cast
 02.Surface:Powder-coated
 03.Color:grey(RAL 7037)
 04.Material:Metal (Lever)
 05.Sealing:NBR
 06.Limiting temperatures:-40°C ~ +125°C
 07.Flammability acc to UL94:V0
 08.Degree of protection acc.to EN60529 for coupled connector :IP65
 09.Rohs compliance

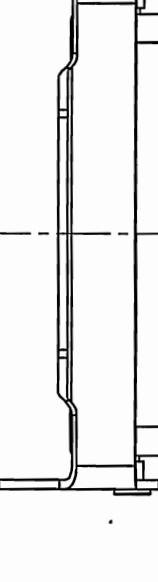

PART NO.:	/
APPD:	HYS 2017.7.5
CHKD:	CHT 2017.7.1
DRFT:	Mr.yang 2017/06/28
THIRD ANGLE PROJECTION	

DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO.,LTD	
NAME: D16B-SF-1L-MPG	
TITLE: CUSTOMER DRAWING	
REV	DO-1
SHEET	1/1
DO NOT SCALE DRAWING	SCALE
1:1.5	1:1.5