

| REVISION RECORD | | | | |
|-----------------|-----|-------------|------|------|
| REV | ECN | DESCRIPTION | DRFT | DATE |
| | | | | |

Technical characteristics:

Specifications
 DIN EN 60 664-1
 DIN EN 61 984



Inserts

- 01. Number of contacts :40+PE
- 02. Rated Current :10A
- 03. Rated Voltage :250V
- 04. Pollution degree :3
- 05. Rated impulse voltage :4kv¹⁰
- 06. Insulation resistance :≥10Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : -40°C~+125°C
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) : ≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance : ≤3mΩ
- 04. Terminal :Crimp terminal
- 05. Wire gauge :0.14-2.5mm² (AWG 26-14)
- 06. Stripping length :8.0mm
- 07. Rohs Compliance

Note:Crimp contact pins should order separately

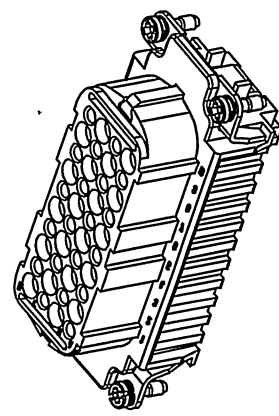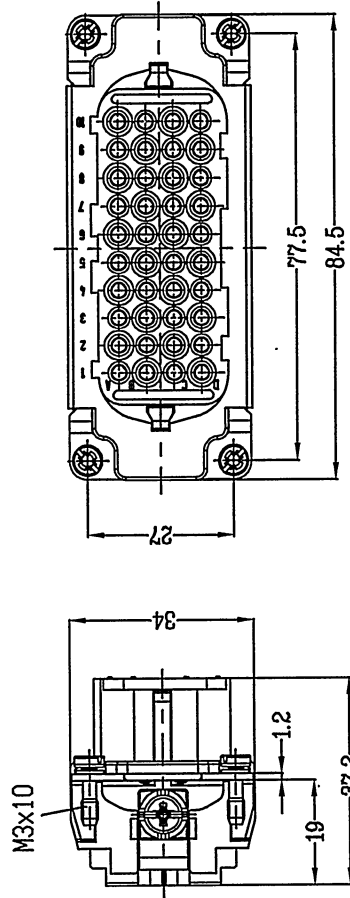

| | | | |
|----------|------------------|------------------------|-----------------------------------|
| PART NO: | / | DEGSON® | NINGBO DEGSON ELECTRICAL CO., LTD |
| APPD: | HJS 2016.8.27 | NAME: | 宁波高松电子有限公司 |
| CHKD: | LJM 2016.8.25 | | DD-040-FC |
| DRFT: | young 2016.07.25 | TITLE: | CUSTOMER DRAWING |
| | | DRAWING NO.: | DD-040-FC-E01 |
| | | REV | DO-1 |
| | | SHEET | 1/1 |
| | | DO NOT SCALE | DRAWING SCALE |
| | | MM (INCH) | 2 |
| | | THIRD ANGLE PROJECTION | 1 |

DETACHED LISTS