

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications
 DIN EN 60 664-1
 DIN EN 61 984



Inserts

- 01. Number of contacts : 108+PE
- 02. Rated Current : 10A
- 03. Rated Voltage : 250V
- 04. Pollution degree : 3
- 05. Rated impulse voltage : 4kv_{in}
- 06. Insulation resistance : $\geq 10^9 \Omega$
- 07. Material: Polycarbonate
- 08. Rated voltage acc. to UL/CSA: 600V
- 09. Limiting temperatures : -40°C ~ +125°C
- 10. Flammability acc. to UL94: V0
- 11. Mechanical working life (mating cycles) : ≥ 500

Contacts

- 01. Material: Copper alloy
- 02. Surface: hard-silver plated
- 03. Contact resistance : $\leq 3m\Omega$
- 04. Terminal : Crimp terminal
- 05. Wire gauge : 0.14-2.5mm² (AWG 26-14)
- 06. Stripping length : 6-8mm

Note: Crimp contact pins should order separately

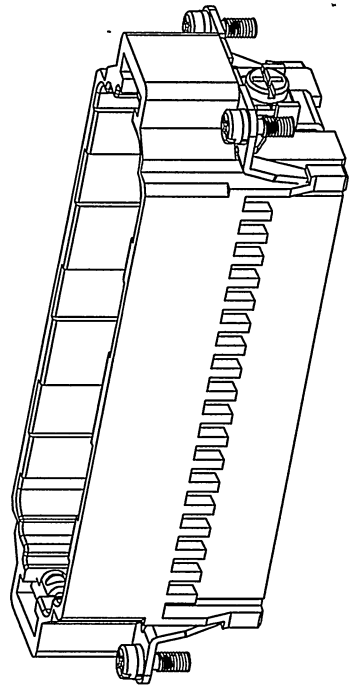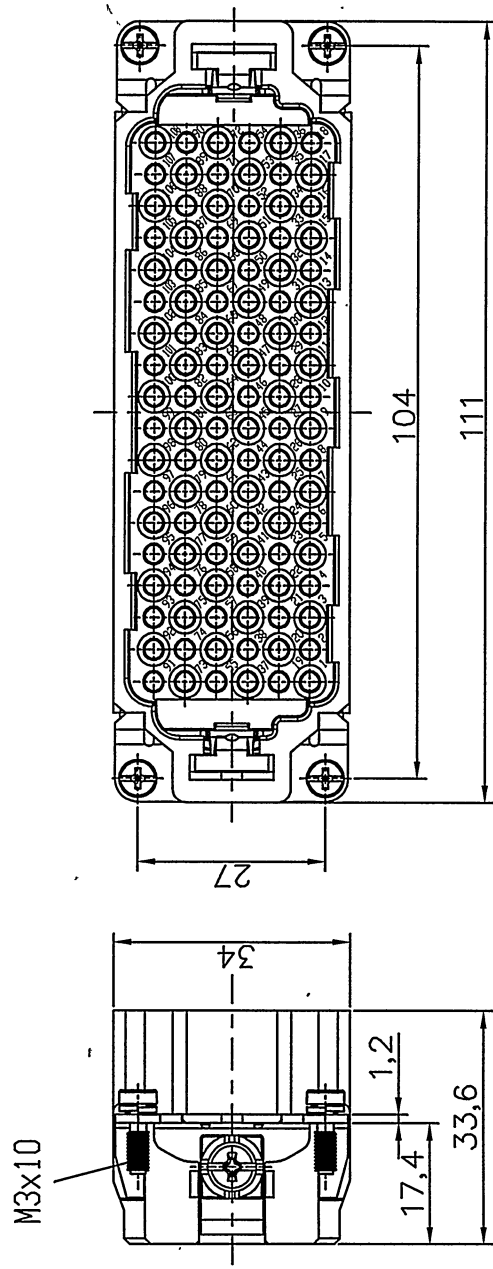

PART NO.: /	NAME: HJS 2016.10.20	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
		APPD: JYM 2016.10.18	DDD-108-MC
		CHKD: Mr. Yang	TITLE: CUSTOMER DRAWING
		DRFT: 2016.09.25	DRAWING NO.: DDD-108-MC-E01
THIRD ANGLE PROJECTION		REV: DO-1	SCALE: 1:1
DO NOT SCALE DRAWING		SHEET: 1/1	SCALE: 1:1