


DIN 985

Prevailing torque type hexagon nuts with non-metallic insert, thin type
 Nakrętki samozabezpieczające niskie z wkładką niemetalową

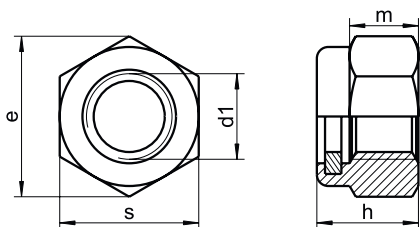

d1	m	h	s	e
M2,5	2,3	3,5	5	5,50
M3	2,4	4,0	5,5	6,01
M4	2,9	5,0	7	7,66
M5	3,2	5,0	8	8,79
M6	4,0	6,0	10	11,05
M8	5,5	8,0	13	14,38
M10	6,5	10,0	17	18,90
M12	8,0	12,0	19	21,10
M14	9,5	14,0	22	24,49
M16	10,5	16,0	24	26,75
M18	13,0	18,5	27	29,56
M20	14,0	20,0	30	32,95
M22	15,0	22,0	32	35,05
M24	15,0	24,0	36	39,55
M27	17,0	27,0	41	45,02
M30	19,0	30,0	46	50,85
M33	22,0	33,0	50	55,37
M36	25,0	36,0	55	60,79

MAT.	BOX
★ ★	1000
★ ★	1000
★ ★	1000
★ ★	1000
★ ★	500
★ ★	200
★ ★	100
★ ★	100
★ ★	100
★ ★	50
★ ★	50
★ ★	50
★ ★	25
★ ★	25
★ ★	25
★ ★	25
★ ★	25
★ ★	25

★ A1 / ★ A2 / ★ A4