

DIGITUS®

Professional

DIGITUS® Line Interactive UPS DN-170013-1 600VA/360W



✓ 2 Ways European output

✓ 2~6ms transfer time(10ms max)

✓ Fast Charge (4 hours 90%)

✓ Backup time 10~12mins

Abstract

DIGITUS® Line Interactive UPS DN-170013-1, 2ways European output 600VA 360W

Input 160~290V AC Output 230V AC +/-10%

High performance protection for your business and office computer systems against data loss and damage

Features

- Capacity 600VA/360W
- Input: 162~290V AC Output Voltage 230V AC +/-10%
- Typical 2-6 ms(10 ms max) Transfer Time , Charging Time 4-6 hours recover to 90% capacity. Simulated Sine Wave
- BATTERY 12 V/7 AH*1
- Sound alarm. Overload, discharge, and overcharge protection
- Dimension (DxWxH) 279 x 101 x 142 mm Net Weight 4.25Kg


Product Overview

DIGITUS® Line Interactive UPS with Compact size, excellent microprocessor control guarantees high reliability

Boost and buck AVR for voltage stabilization, Auto restart while AC is recovering

Off-mode charging and cold start function

DIGITUS® is made for high demand IT-Infrastructure Solutions – designed and developed on highest standard in Germany.

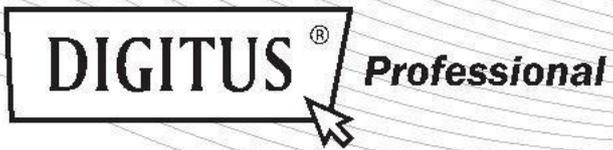

DIGITUS[®] Line Interactive UPS DN-170013-1 600VA/360W

Part Number Information

- DN-170013-1 Line Interactive UPS, 2ways European output. 600VA 360W, Input 160~290V AC, Output 230V AC +/-10%
- DN-170014-1 Line Interactive UPS, 4ways European output 1000VA 600W, Input 160~290V AC, Output 230V AC +/-10%.
Software & USB port, LED monitor
- DN-170015-1 Line Interactive UPS, 4ways European output 1500VA 900W, Input 160~290V AC, Output 230V AC +/-10%.
Software & USB port, LED monitor

DIGITUS[®] is made for high demand IT-Infrastructure Solutions – designed and developed on highest standard in Germany.