
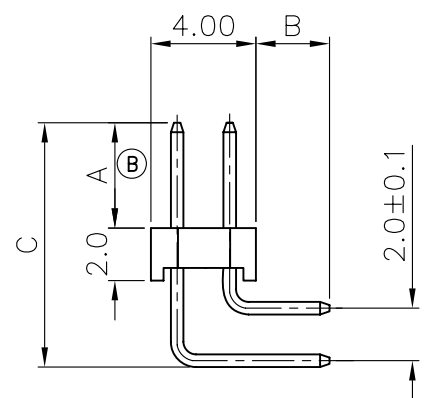


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/08/05'	~	LJC 05/08/05'
B	图面绘制错误	LL 08/11/06'	~	LJC 08/11/06'
C	增加规格尺寸	LL 01/15/07'		

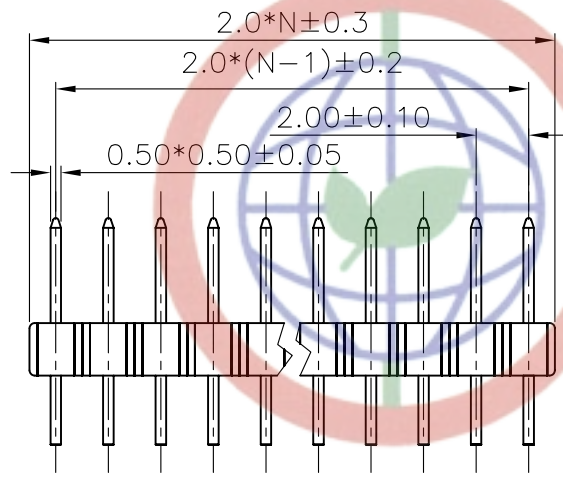

NOTES:


- MATERIAL&FINISHES
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO +105°C.
- PART NUMBER: DS1025-06
- PRODUCT NUMBER CODE:  
DS1025-06 - X X X X X X

A&B: CUSTOMER LENGTH AVAILABLE  
N: NUMBER OF CONTACTS/2

TABLE A

TYPE	Dimension			Pin Length
	A	B	C	
1	4.00	2.80	9.30	10.70 14.70
2	6.00	2.80	11.30	12.70 16.70
3	2.42	5.00	12.70	16.10 20.10
4	3.70	3.00	9.00	10.30 14.30
5	3.20	3.00	9.20	10.50 14.50
6	8.00	2.80	13.30	14.70 18.70
7				
8				
9				
10				

Dim A/B/C type  
1:Type 1  
2:Type 2  
.....  
CONTACTS TYPE  
R:RIGHT ANGLE TYPE  
HOUSING COLOR  
B:BLACK  
CONTACT PLATING  
8: FULL GOLD FLASH  
CONNECTOR TYPE  
P:PLUG  
No.OF CONTACTS  
2\*2-2\*X

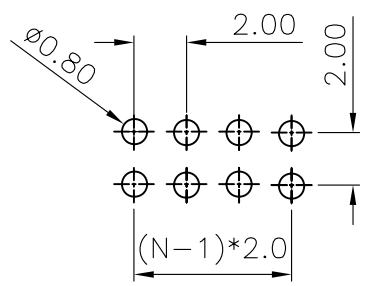

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	DUAL ROW RIGHT ANGLE	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1025-06 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4		Add: East Industry Zone KuangYan	
.XX	±0.25	.XX	±2°			Town xixi Zone KuangYan		
DRAWING TYPE		CUSTOMER				晨翔电子有限公司		
SCALE	1:1	SHEET	1 OF 1			CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING NO.		C-DS1025-06-XXXXX		P.C:315353				