

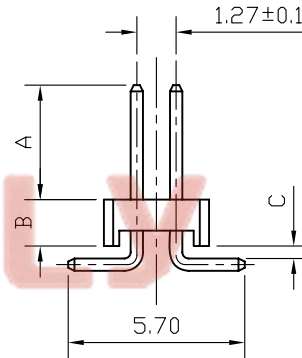
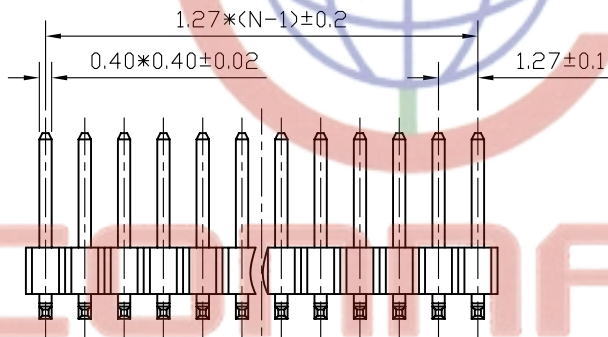


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

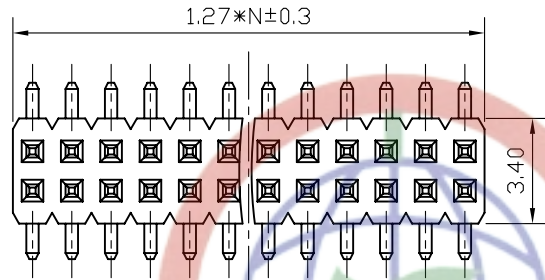

N:NUMBER OF CONTACTS/2

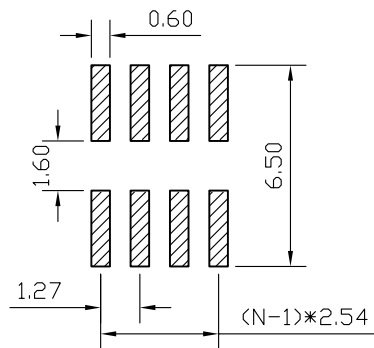

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM C
1	3.70	0.40
2	3.00	0.40
3	3.30	0.20
4	3.30	0.40
5		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 50mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1031-08
- PRODUCT NUMBER CODE:

DS1031-08 - X X X X X X X X

- DIM.A C TYPE
  - 1: TYPE 1
  - 2: TYPE 2
  - 3: TYPE 3
  - .....
- HOUSING HEIGHT(DIM.B)
  - 1: 1.00mm
  - 2: 1.50mm
  - 3: 1.70mm
  - 4: 2.00mm
- MOUNTING TYPE
  - S: SMT TYPE
- HOUSING COLOR
  - B:BLACK
- CONTACT PLATING
  - 8: FULL GOLD FLASH
- CONNECTOR TYPE
  - P:PLUG
- No.OF CONTACTS
  - 2\*1-2\*40
- SERIES No.
  - DS1031-08

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5'		PIN HEADER PITCH 1.27mm SMT TYPE
.X	±0.38	.X	±3'	mm	
.XX	±0.25	.XX	±2'		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1		A4	DS1031-08 SERIES
DRAWING NO.		C-DS1031-08-XXXXXXX		SHEET 1 OF 1	

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD