

**Drg No :-C 31935**

# INSTALLATION DRAWING

ISSUE	REVISION	DATE
1	FIRST ISSUE	18.7.95
2		4.3.87
3		7.7.89
4		29.7.92
5		30.4.96
6	REDRAWN ON NEW FORMAT	27.1.00

## SPECIFICATION

ACTUATING FORCE = 1.4N [5ozf] MAX

RELEASE FORCE= 0.25N [0.9ozf] MIN

FREE POSITION = 8.8 [0.35] MAX


OPERATING POSITION =  $8.1^{+0.3}_{-0.2}$  [0.32]

MOVEMENT DIFFERENTIAL = 0.13 [0.005] MAX


OVER TRAVEL = DEPRESS TO CASE (AVAILABLE)

SPECIAL FEATURE :-  
TESTED AND STAMPED TO U.L.  
AND C.S.A. REQUIREMENTS.

APPROVAL RATING :-  
5A - 250 V.A.C.

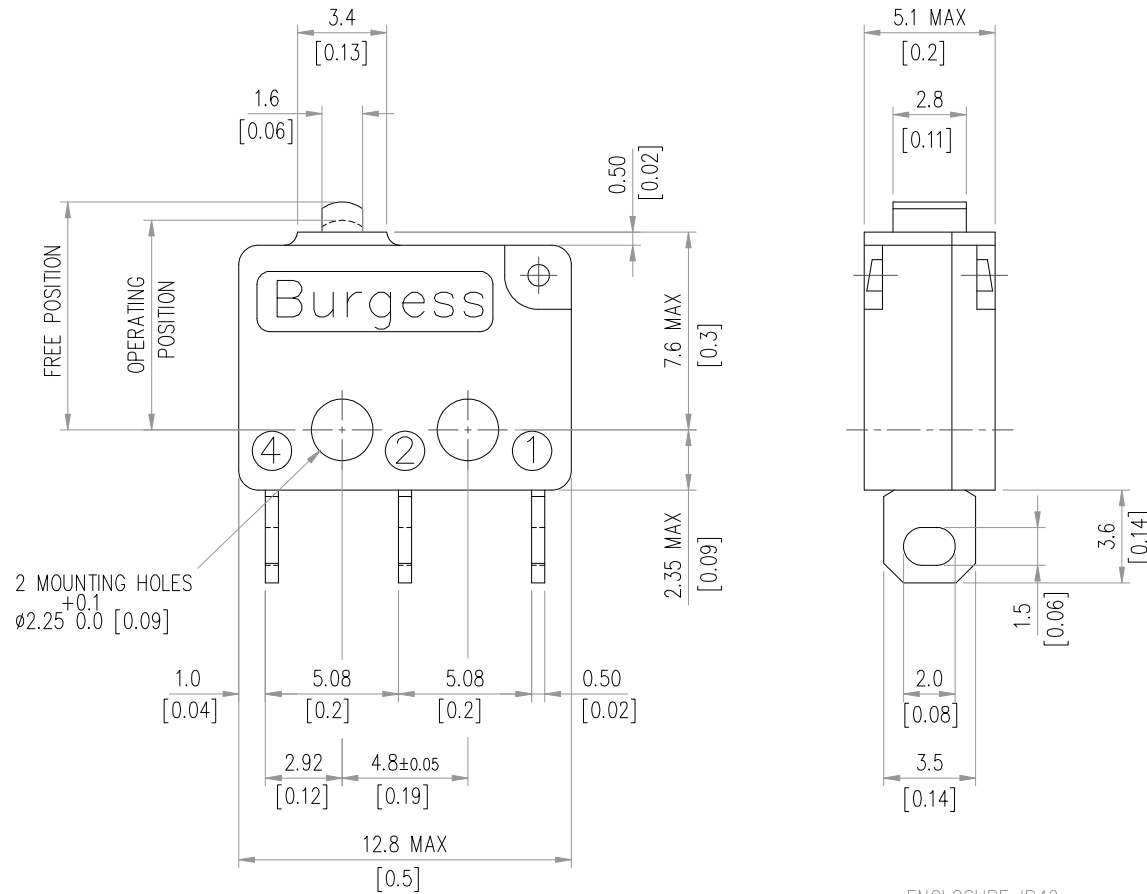

## DIAGRAM OF CONNECTIONS

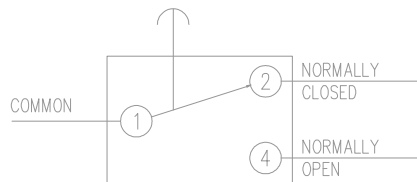

DEGREE OF PROTECTION: - ENCLOSURE IP40  
TERMINALS IP00

**SAIA-Burgess Electronics**

SWITCHES • MOTORS • CONTROLLERS

SAIA-Burgess Electronics Limited  
Dukesway, Team Valley Trading Estate  
Gateshead, Tyne & Wear NE11 0UB  
Tel: (0191)4016100, Fax: (0191)4016322



**DO NOT SCALE !**  
This drawing must only be  
amended on CAD system

TOLERANCES UNLESS STATED:-  
NO DECIMAL PLACE  $\pm 0.50$  1 DECIMAL PLACES  $\pm 0.25$   
2 DECIMAL PLACES  $\pm 0.15$  ANGULAR  $\pm 1^\circ$   
INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

DRAWN	J.H.D.	<b>Approved</b>	
DATE	18.7.85	DRAWING OFFICE	
SCALE	5:1	ENGINEERING	
DATE ISSUED		QUALITY ASSURANCE	

TITLE / DESCRIPTION	
F4T7GP-UL	
<b>Drg No :- C 31935</b>	<b>A3</b>