



FFA.2E.306.CLAC70Z

MECHANICAL DETAILS

Shell Style Model FFA* : Straight plug
cable collet and nut for fitting a bend relief


Keying Hermaphroditic keying ("half moon" insert), plug has male pin 1

Housing Material Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces

Cable Fixing 6.6 - 7 mm

Variant 2 Z : Nut for fitting a bend relief

	A	L	M	S2
Mm.	16	52	36	12
In.	0.63	2.05	1.42	0.47



PERFORMANCE DETAIL

Insert 2E.306 : 6 Low Voltage

Insulator L: PEEK

Specifications

Contact Type: Solder

Max. Matings: 5000

Contact Dia.: 1.3 mm (0.051in)

Bucket Dia.: 1 mm (0.039in)

Max. Solid 0.5 mm² (AWG 20)

Max. Stranded 0.5 mm² (AWG 20)

R (max): 3.6 mOhm



OTHER CHARACTERISTICS

Endurance (Shell) Endurance (Shell):

Temp (min) -55°C

Temp (max) +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms]


Salt Spray >144 hr

Climatical 50/175/21

Shielding (min): 95 dB (10 MHz)

Shielding (min): 80 dB (1 GHz)

IP Rating 68

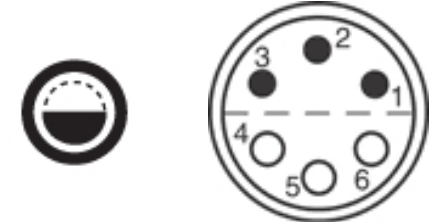

Available Download

unipole_multipole.pdf

Related links

- [Contact](#)
- [Quote Request](#)
- [Catalogs Downloads](#)
- [Catalogs Requests](#)
- [Sample Request](#)
- [3D drawings](#)