
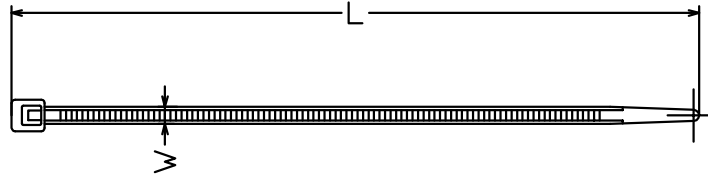



ITEM: FIX-S-2.5X60






**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	60MM (2.36 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	




ITEM: FIX-S-2.5X80

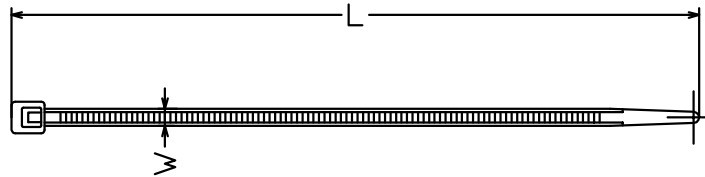



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  
 $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ ,  
 LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE  
 SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  
 $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	80MM (3.15 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	



ITEM: FIX-S-2.5X100

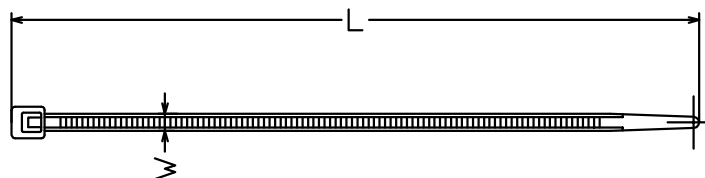




**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  
 $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ ,  
 LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE  
 SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  
 $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	100MM (3.94 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	




ITEM: FIX-S-2.5X120

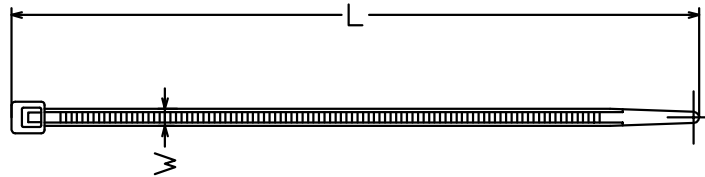



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	120MM (4.72 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	




ITEM: FIX-S-2.5X150

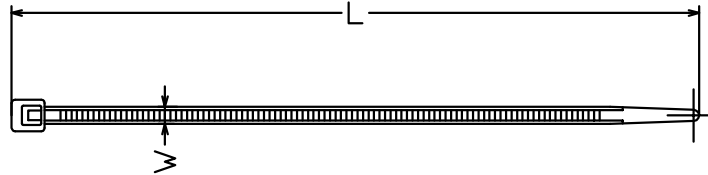




**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	150MM (5.91 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	




ITEM: FIX-S-2.5X160

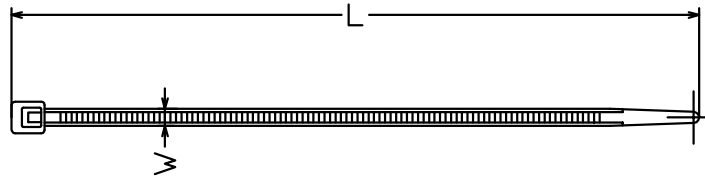




**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	160MM (6.29 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	




ITEM: FIX-S-2.5X200

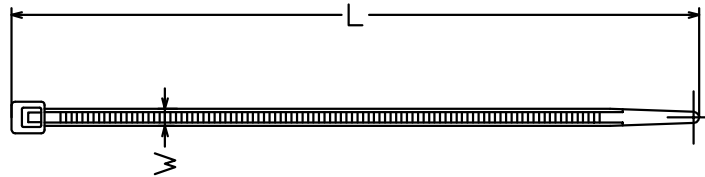



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	200MM (7.87 INCH)
WIDTH:	2.5MM (0.10 INCH)
THICKNESS:	1.10MM (0.043 INCH)
TENSILE STR.	18 LBS (8.1 KGS)
Fix & Fasten	



ITEM: FIX-S-3.6X100

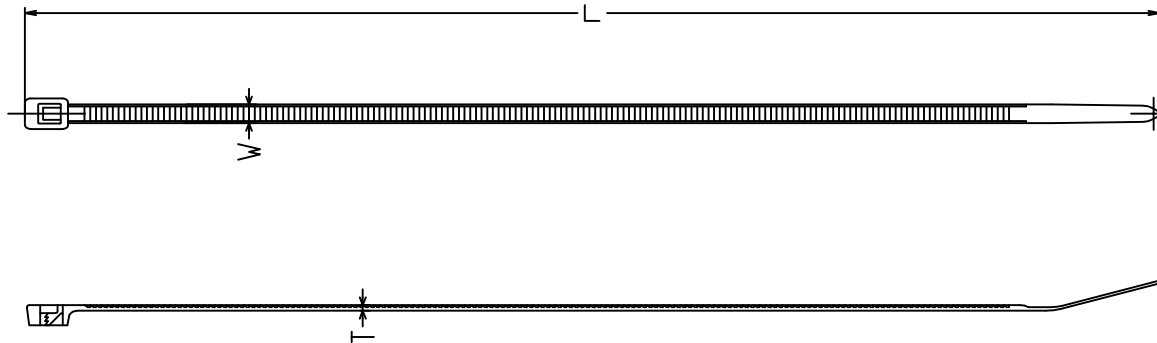

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .



MATERIAL:	ASCEND PA66 Natural & Black
LEMGTH:	100MM (3.937INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten





ITEM: FIX-S-3.6X120

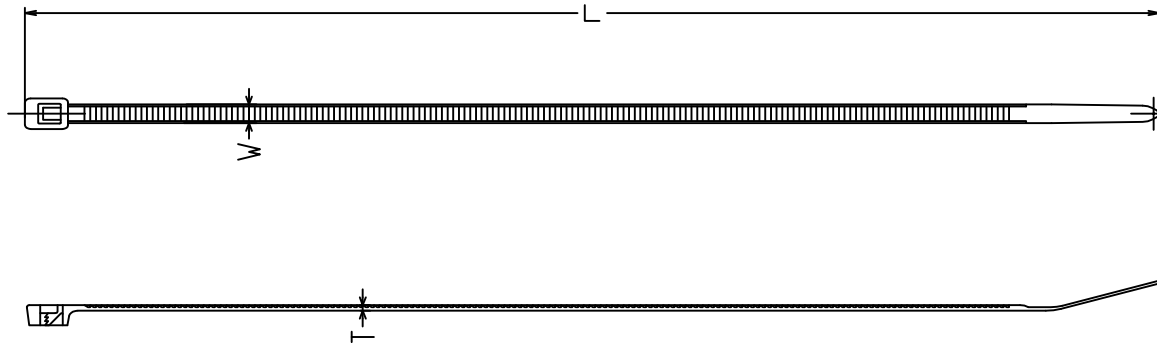

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 Natural & Black
LEMGTH:	120MM (4.72INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X140

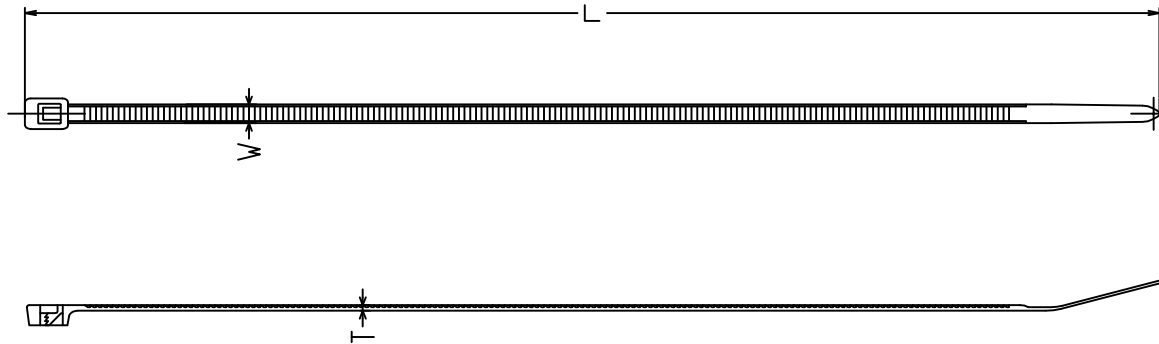

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 Natural & Black
LEMGTH:	140MM (5.51INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X150

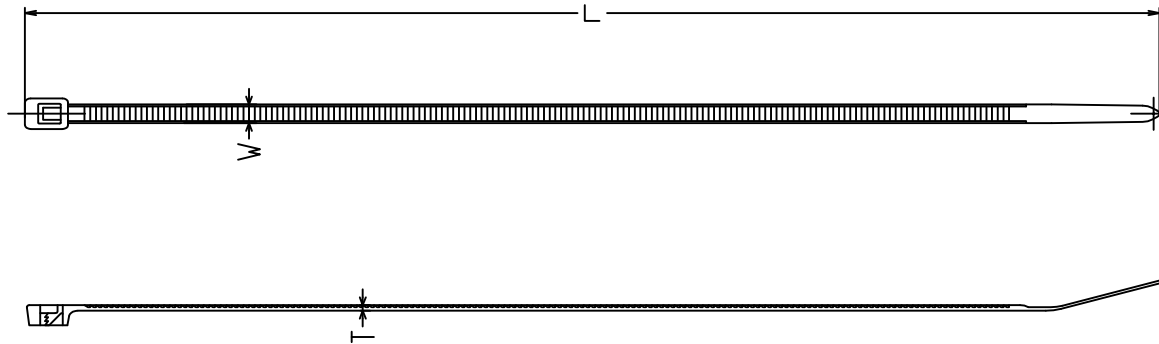

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 Natural & Black
LEMGTH:	150MM (5.91INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X180

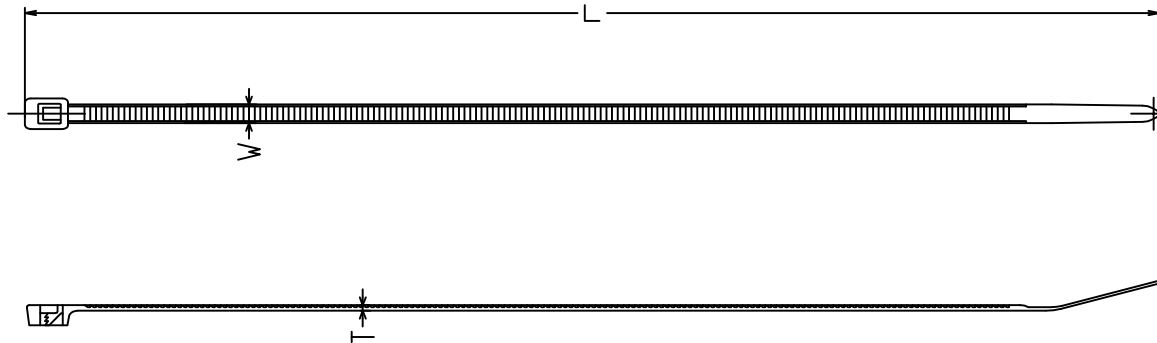


**NOTE :**



TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

<b>MATERIAL:</b>	ASCEND PA66 Natural & Black
<b>LEMGTH:</b>	180MM (7.09INCH)
<b>WIDTH:</b>	3.6MM (0.14 INCH)
<b>THICKNESS:</b>	1.2MM (0.047 INCH)
<b>TENSILE STR.</b>	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X200

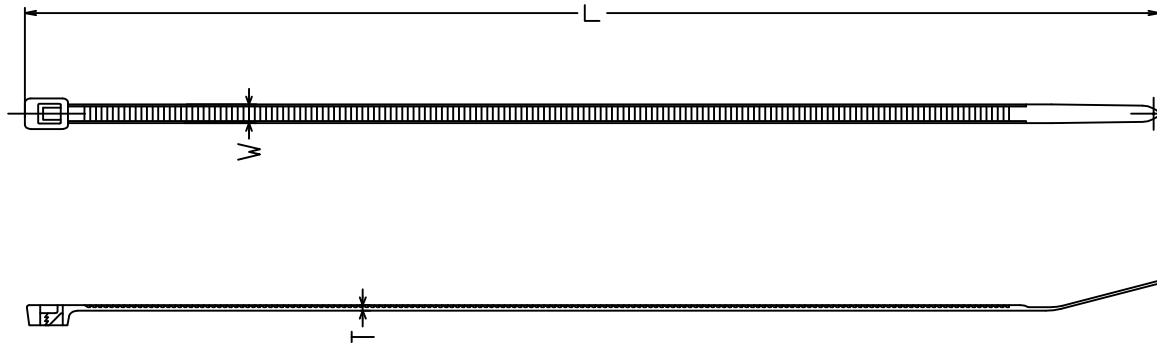

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 Natural & Black
LEMGTH:	200MM (7.87INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X250

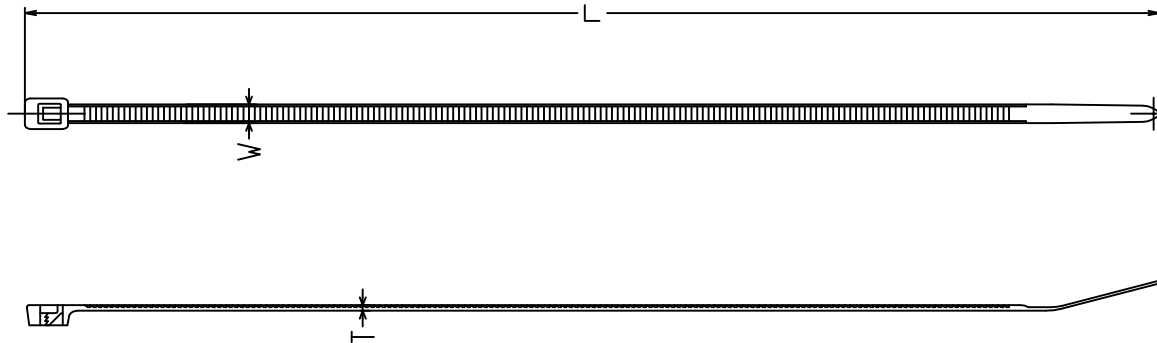

NOTE :


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 NYLON
LEMGTH:	250MM (9.84INCH)
WIDTH:	3.6MM (0.14 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X280

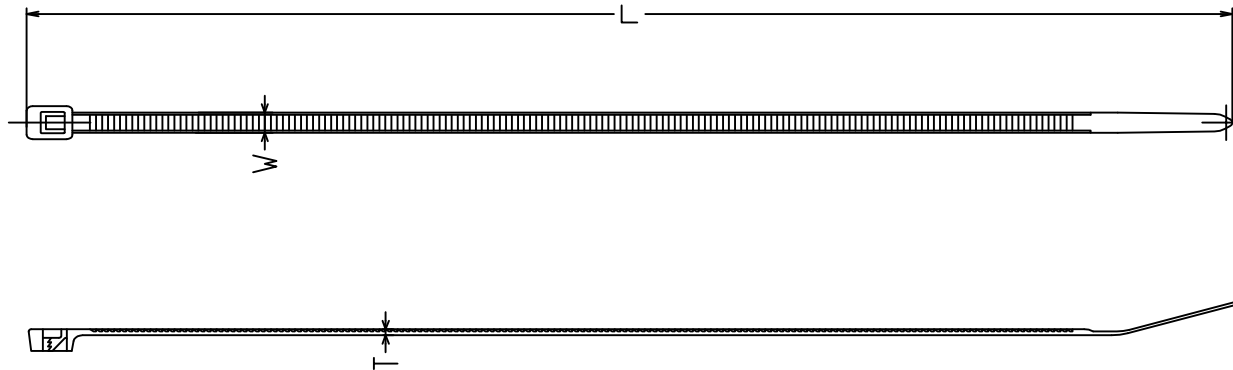

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 NYLON
LEMGTH:	280MM (11.02INCH)
WIDTH:	3.6MM (0.14INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-3.6X300

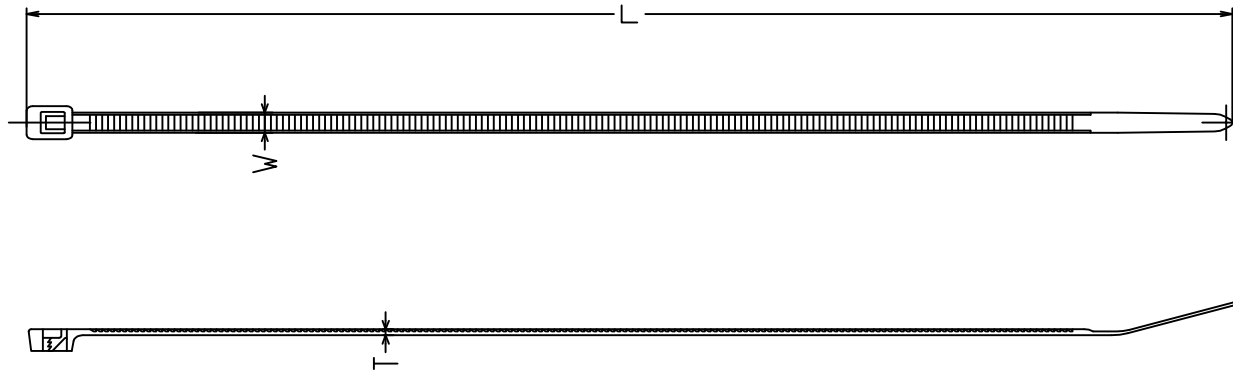

**NOTE :**


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .



MATERIAL:	ASCEND PA66 NYLON
LEMGTH:	300MM (11.81INCH)
WIDTH:	3.6MM (0.14INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten





ITEM: FIX-S-3.6X370

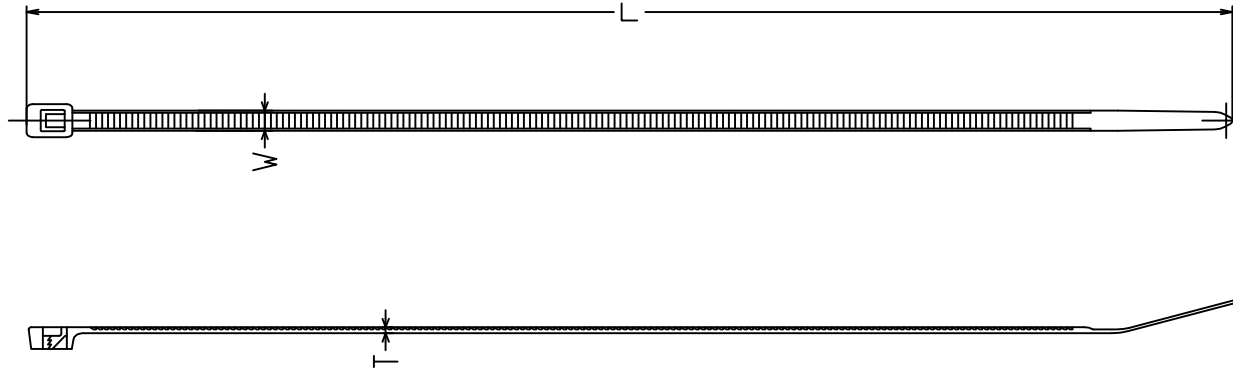

NOTE :


TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .



MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 NYLON
LEMGTH:	370MM (14.57INCH)
WIDTH:	3.6MM (0.14INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	40 LBS (18.2KGS/180N)

Fix & Fasten



ITEM: FIX-S-4.8X120

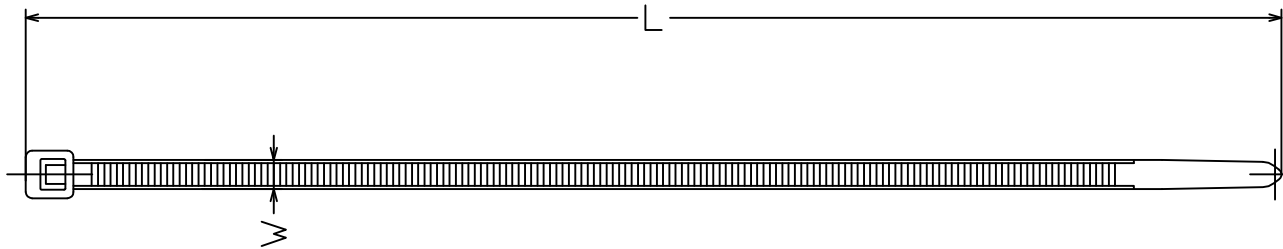


**NOTE:**



TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	120MM (4.72 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)

Fix & Fasten




ITEM: FIX-S-4.8X160

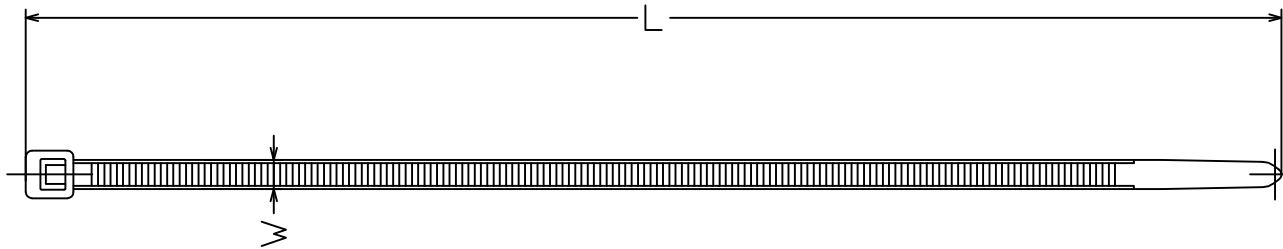



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	160MM (6.30 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




ITEM: FIX-S-4.8X180

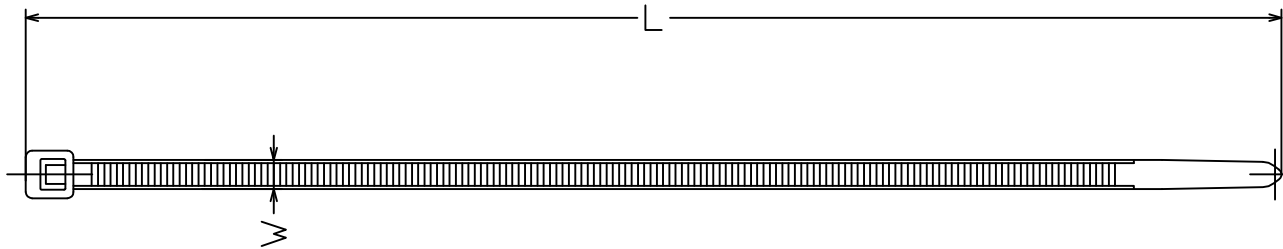



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	180MM (7.09 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	



ITEM: FIX-S-4.8X185

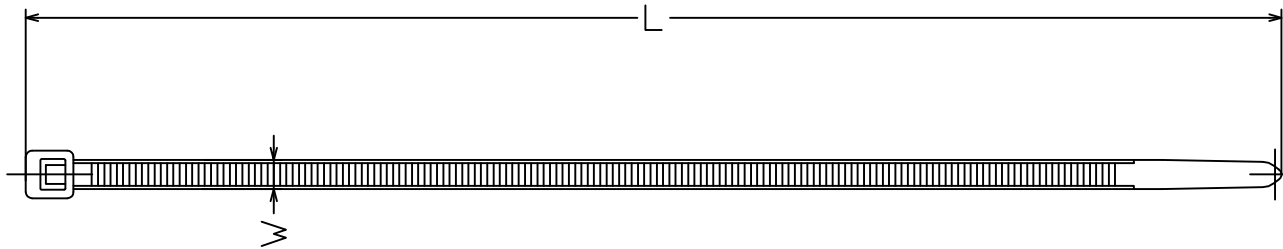


**NOTE:**




TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	185MM (7.28 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)

Fix & Fasten



ITEM: FIX-S-4.8X200S

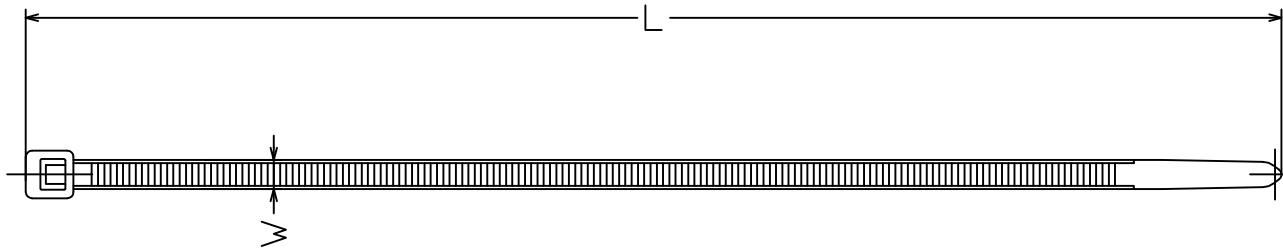


**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)



INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	200MM (7.87 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




ITEM: FIX-S-4. 8X200T

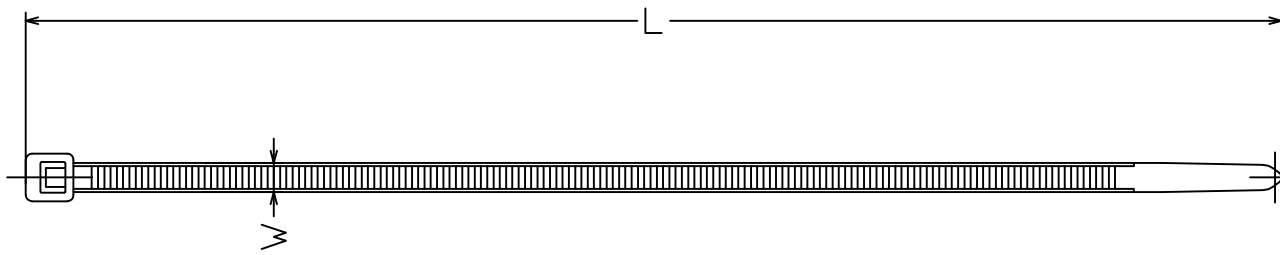



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	200MM (7.87 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	75 LBS (34.02 KGS/333N)
Fix & Fasten	



ITEM: FIX-S-4.8X215

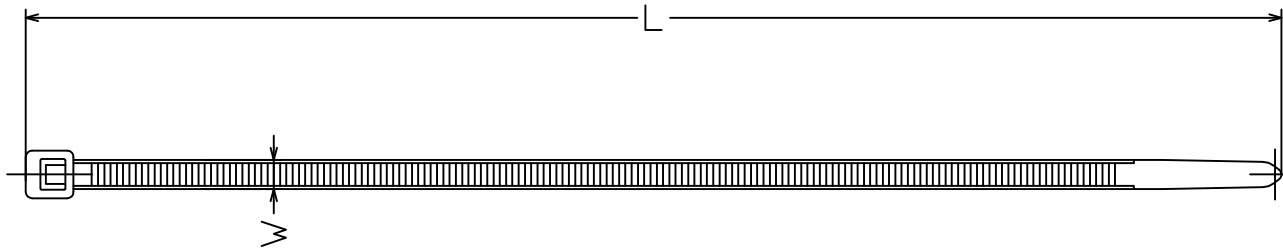


**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.




MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	215MM (8.46 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)

Fix & Fasten






ITEM: FIX-S-4. 8X250S

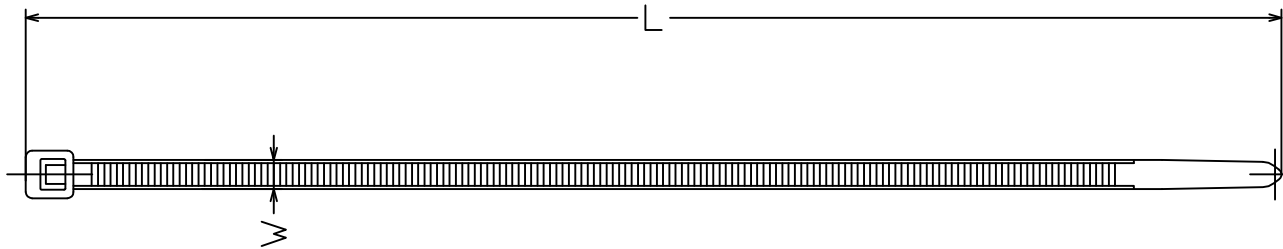




**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	250MM (9.84 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	



ITEM: FIX-S-4. 8X250W

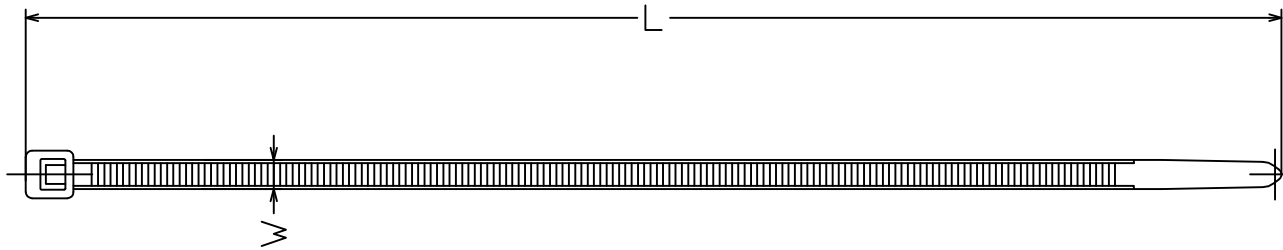


**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGTH  $\pm$ 0.039.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGTH  $\pm$  1.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	250MM (9.84 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	75 LBS (34.04 KGS/333N)

Fix & Fasten



G

F

E

D


C

B

A

1


ITEM: FIX-S-4. 8X280S



1

2

2

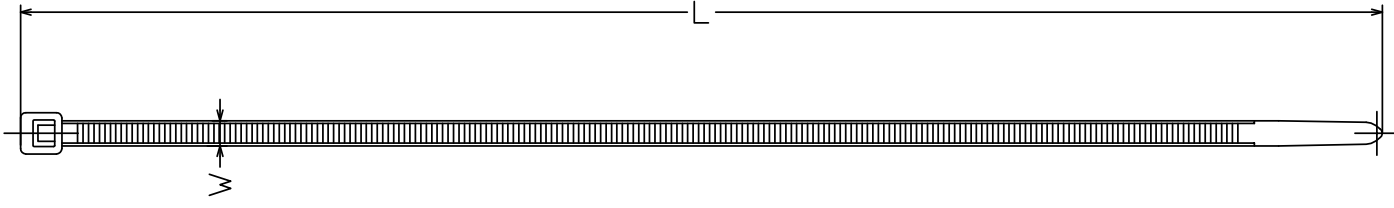


3

3

4

4



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	280MM (11.02 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D


C

B

A

1


ITEM: FIX-S-4. 8X280T



1

2

2

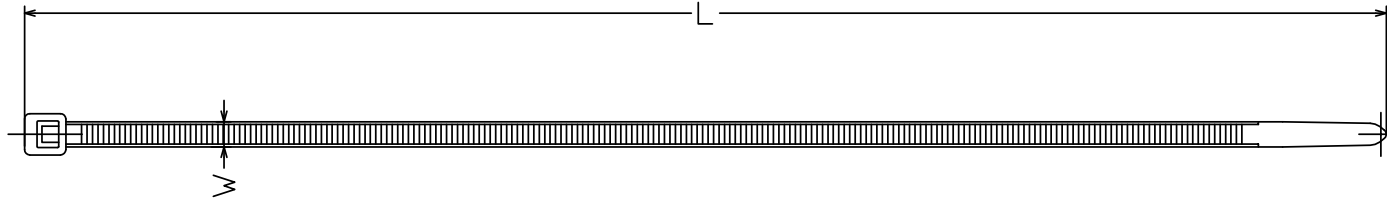

3

3

4

4



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.039$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	280MM (11.02 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	75 LBS (34.04 KGS/333N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D

C


B

A

1


1

ITEM: FIX-S-4. 8X300S



2

2

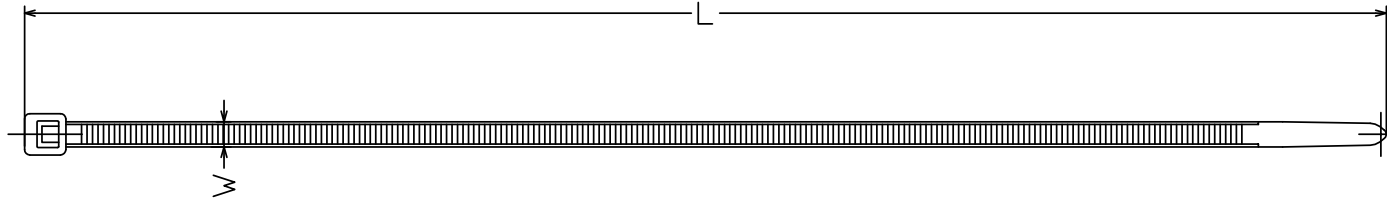

3

3

4

4



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	<b>300MM (11.81 INCH)</b>
WIDTH:	<b>4.8MM (0.19 INCH)</b>
THICKNESS:	<b>1.2MM (0.047 INCH)</b>
TENSILE STR.	<b>50 LBS (22.2 KGS/222N)</b>
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D


C

B

A

1


ITEM: FIX-S-4. 8X300T



1

2

2

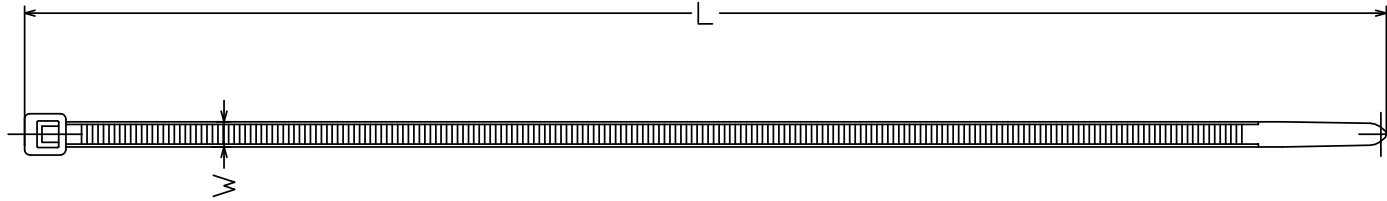

3

3

4



4

**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	300MM (11.81 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	75 LBS (34.04 KGS/333N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D


C

B

A

1


ITEM: FIX-S-4. 8X350



1

2

2

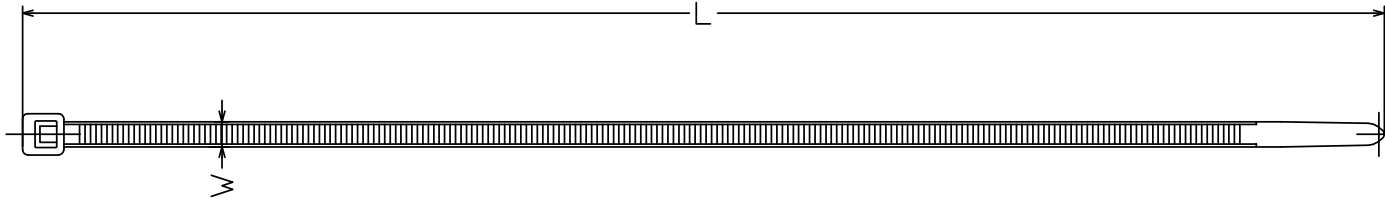

3

3

4



4

**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	350MM (13.78 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D

C


B

A

1


1

ITEM: FIX-S-4. 8X370S



2

2

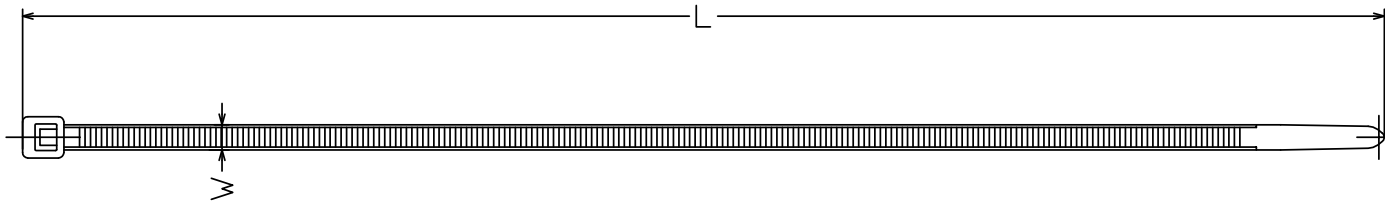


3

3

4

4



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	370MM (14.57 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C





G

F

E

D


C

B

A

1


ITEM: FIX-S-4.8X370T



1

2


2

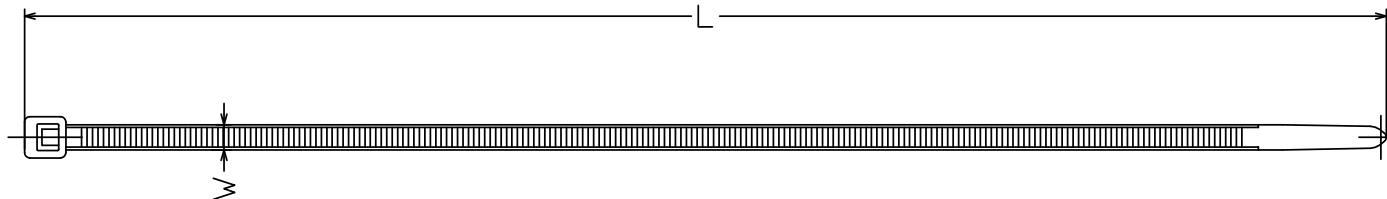

3

3

4



4

**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	370MM (14.57 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.3MM (0.051 INCH)
TENSILE STR.	75 LBS (34.04 KGS/333N)
Fix & Fasten	

5

5

6

6


G

F

E

D

C



G

F

E

D


C

B

A

1


ITEM: FIX-S-4. 8X380



1

2

2

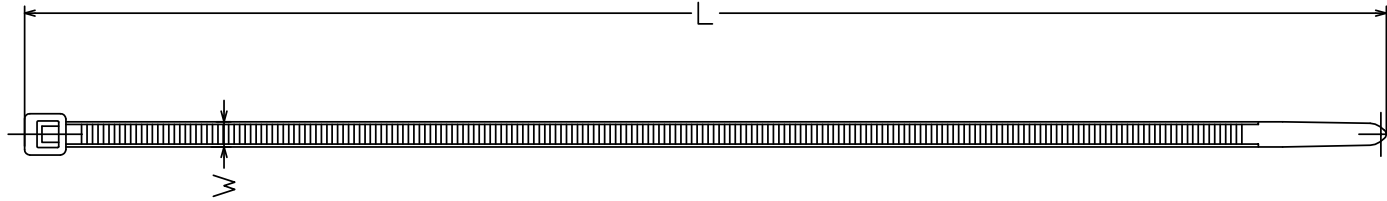

3

3

4

4



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGTH  $\pm 0.078$ .

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGTH  $\pm 1$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMNGTH:	380MM (14.96 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	

5

5

6

6


G

F



E

D

C




**ITEM: FIX-S-4. 8X400**

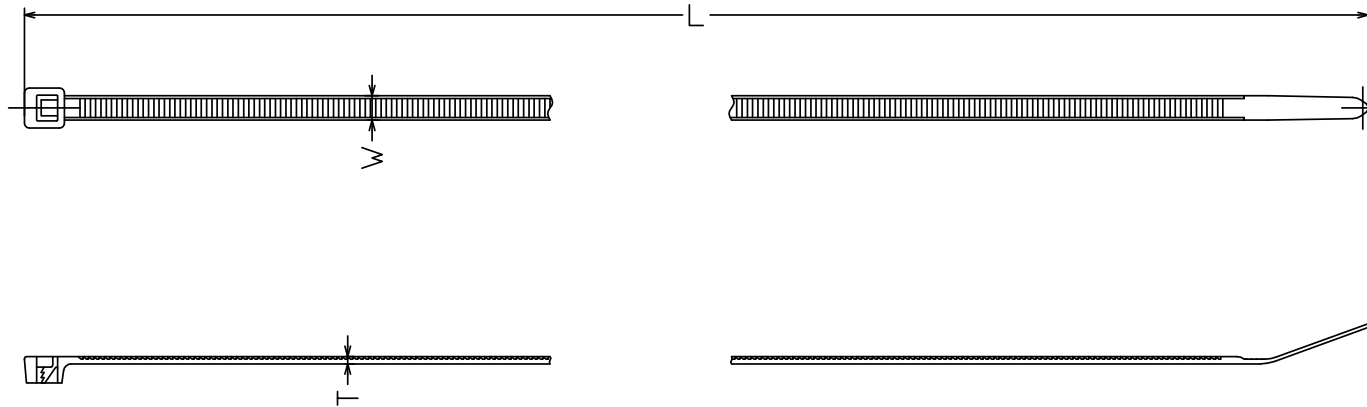



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGH  $\pm 0.078$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGH  $\pm 2$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	400MM (15.75 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




**ITEM: FIX-S-4.8X450**

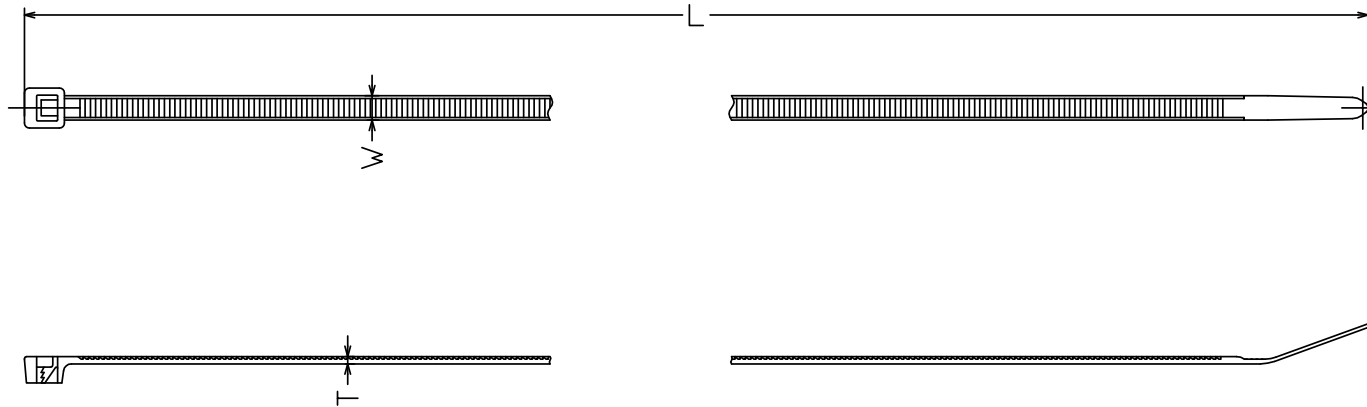



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGH  $\pm$ 0.078.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGH  $\pm$  2.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	450MM (17.72 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




**ITEM: FIX-S-4.8X500**

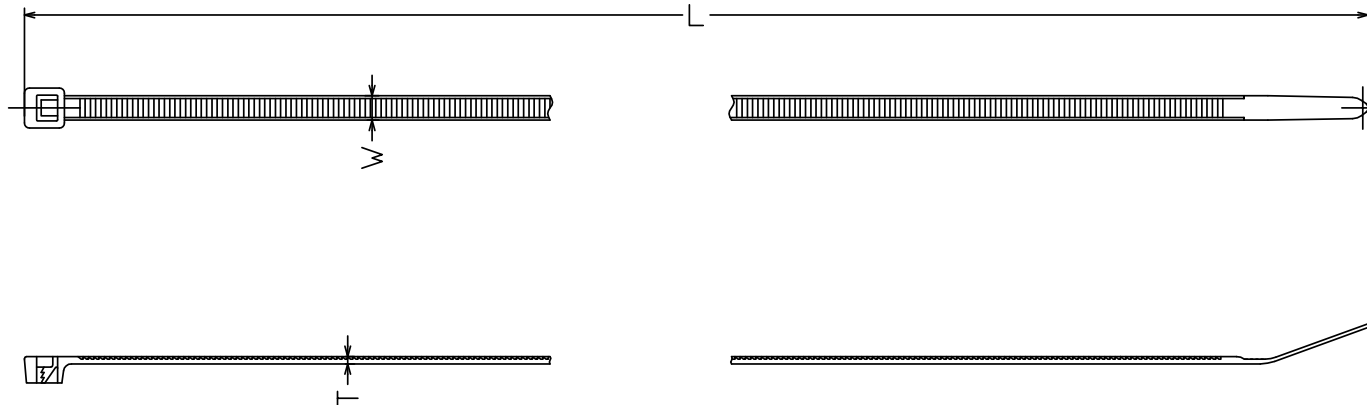



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.0078$ , WIDTH  $\pm 0.0039$ , THICKNESS  $\pm 0.0019$ , LENGH  $\pm 0.078$ .  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm 0.2$ , WIDTH  $\pm 0.1$ , THICKNESS  $\pm 0.05$ , LENGH  $\pm 2$ .

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	500MM (19.68 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




ITEM: FIX-S-4.8X550

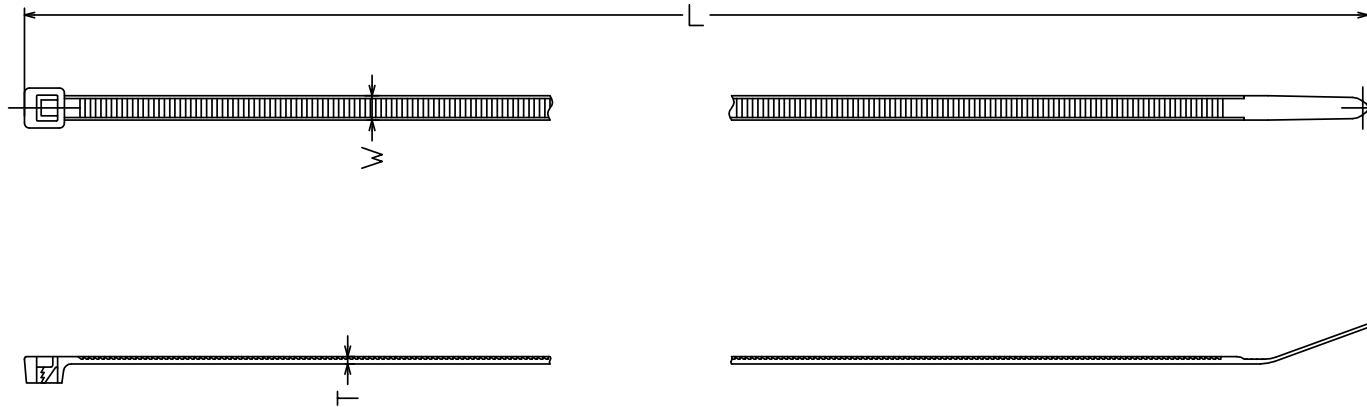



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGH  $\pm$ 0.078.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGH  $\pm$  2.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	550MM (21.65 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	




ITEM: FIX-S-4. 8X650

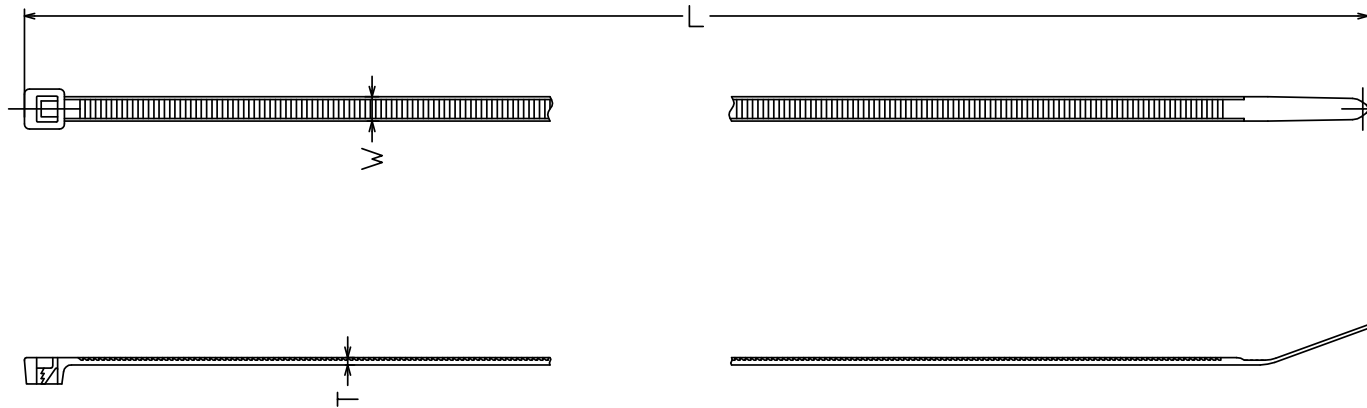



**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGH  $\pm$ 0.078.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGH  $\pm$  2.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	650MM (25.59 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	



**ITEM: FIX-S-4.8X750**

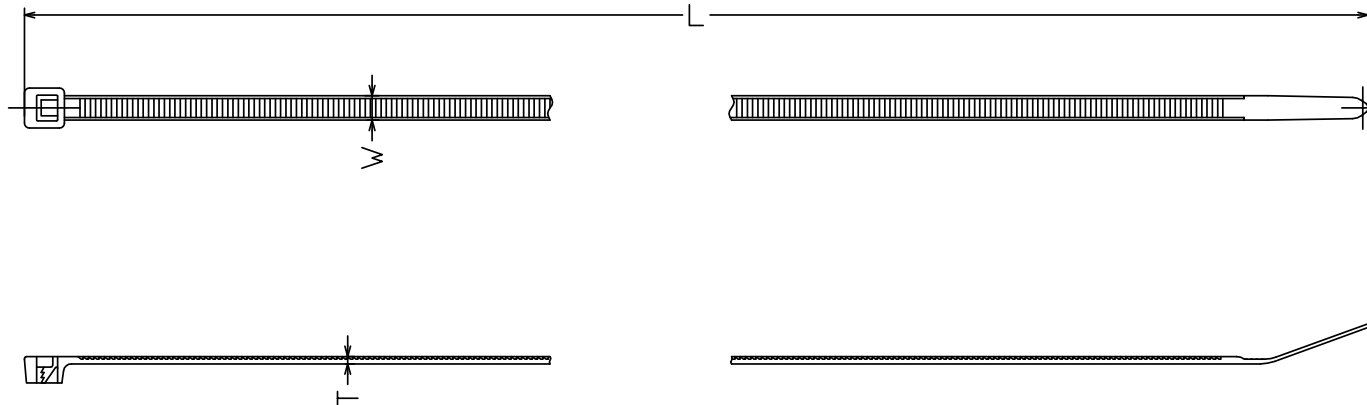

**NOTE:**

TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F)  
 INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$  0.0078, WIDTH  $\pm$ 0.0039, THICKNESS  $\pm$ 0.0019, LENGH  $\pm$ 0.078.  
 MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK  $\pm$ 0.2, WIDTH  $\pm$ 0.1, THICKNESS  $\pm$  0.05, LENGH  $\pm$  2.

MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS
LEMGTH:	750MM (29.53 INCH)
WIDTH:	4.8MM (0.19 INCH)
THICKNESS:	1.2MM (0.047 INCH)
TENSILE STR.	50 LBS (22.2 KGS/222N)
Fix & Fasten	

