


KEMET, FLLD3-PH, EMI/RFI Filters, Noise Suppression, 690 VAC, 250 A, 300x180x125mm

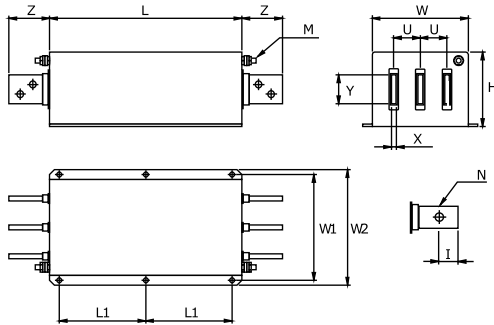

**Dimensions**

<b>L</b>	300mm NOM
<b>W</b>	180mm NOM
<b>H</b>	125mm NOM
<b>L1</b>	120mm NOM
<b>W1</b>	205mm NOM
<b>W2</b>	230mm NOM
<b>U</b>	55mm NOM
<b>X</b>	5mm NOM
<b>Y</b>	20mm NOM
<b>Z</b>	45mm NOM
<b>I</b>	15mm NOM
<b>N</b>	9mm NOM
<b>M (Earth)</b>	Threaded Studs M10
<b>Lead</b>	Threaded Studs M10

**Packaging Specifications**

<b>Packaging:</b>	Bulk
<b>Packaging Quantity:</b>	1
<b>Weight:</b>	7 kg

**General Information**

<b>Series:</b>	FLLD3-PH
<b>Style:</b>	Chassis Mount
<b>Description:</b>	EMI Filter, Compact, With Y Capacitor
<b>Features:</b>	Three Phase, High Current, High Voltage
<b>RoHS:</b>	Yes
<b>Qualifications:</b>	IEC/EN 60939, UL 1283
<b>Lead:</b>	Threaded Studs M10

**Specifications**

<b>Voltage AC:</b>	690 VAC
<b>Rated Frequency:</b>	50-60 Hz
<b>Ripple Current:</b>	250 A (50°C)
<b>Rated Temperature:</b>	50°C
<b>Temperature Range:</b>	-40/+100°C
<b>Climate Category:</b>	40/100/21
<b>Test Voltage DC (P to P):</b>	3100 VDC
<b>Test Voltage DC (P to E):</b>	3400 VDC
<b>Voltage:</b>	3100 VDC (Test P to P), 3400 VDC (Test P to E)
<b>Power Loss:</b>	15 W (25°C 50 Hz)
<b>Leakage Current:</b>	5 mA (MAX)