



## FVB.00.303.NLAE24

### MECHANICAL DETAILS

**Shell Style Model** FVB\* : Straight plug for special cable crimping


**Keying** 2 keys (alpha=60, plug: male contacts, receptacle: female contacts)

**Housing Material** Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces

**Cable Fixing** 0 - 0 mm

**Variant 2** :

|     | A    | L    | M    |
|-----|------|------|------|
| Mm. | 9    | 20   | 15.4 |
| In. | 0.35 | 0.79 | 0.61 |

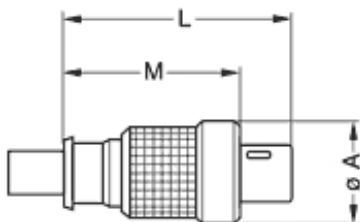

### Available Download

 [unipole\\_multipole.pdf](#)

### PERFORMANCE DETAIL

**Insert** 0.303 : 3 Low Voltage

**Insulator** L: PEEK

#### Specifications

**Contact Type:** Solder

**Max. Matings:** 5000

**Contact Dia.:** 0.5 mm (0.02in)

**Bucket Dia.:** 0.4 mm (0.016in)

**Max. Solid** 0.09 mm<sup>2</sup> (AWG 28)

**Max. Stranded** 0.05 mm<sup>2</sup> (AWG 30)

**R (max):** 8.7 mOhm









### OTHER CHARACTERISTICS

**Shell Style/Model** Libellé

**IP Rating** 50



### Related links

-  [Contact](#)
-  [Quote Request](#)
-  [Catalogs Downloads](#)
-  [Catalogs Requests](#)
-  [Sample Request](#)
-  [3D drawings](#)