
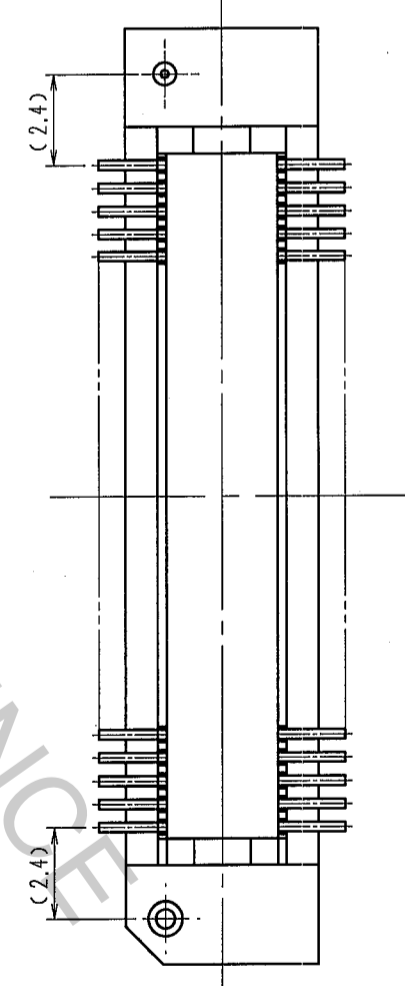
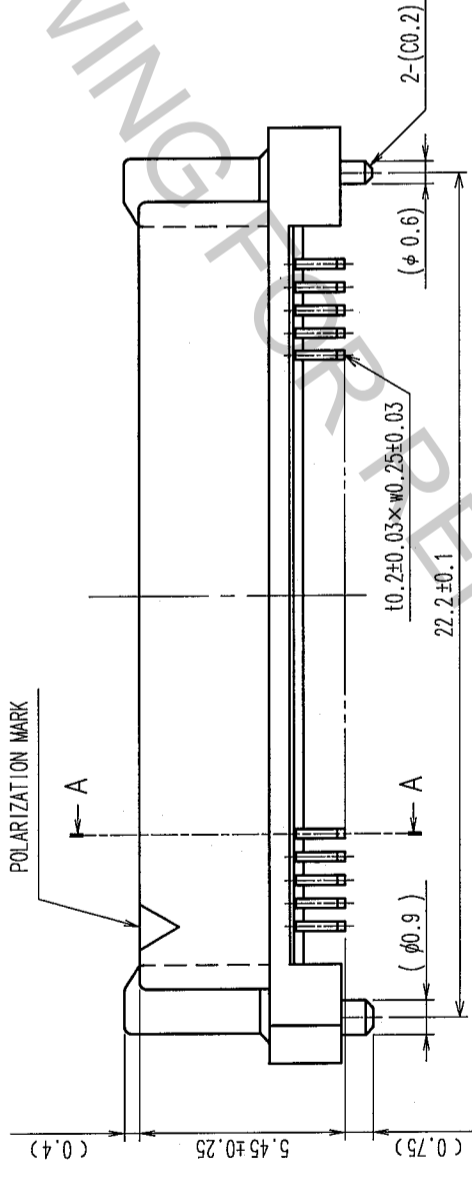
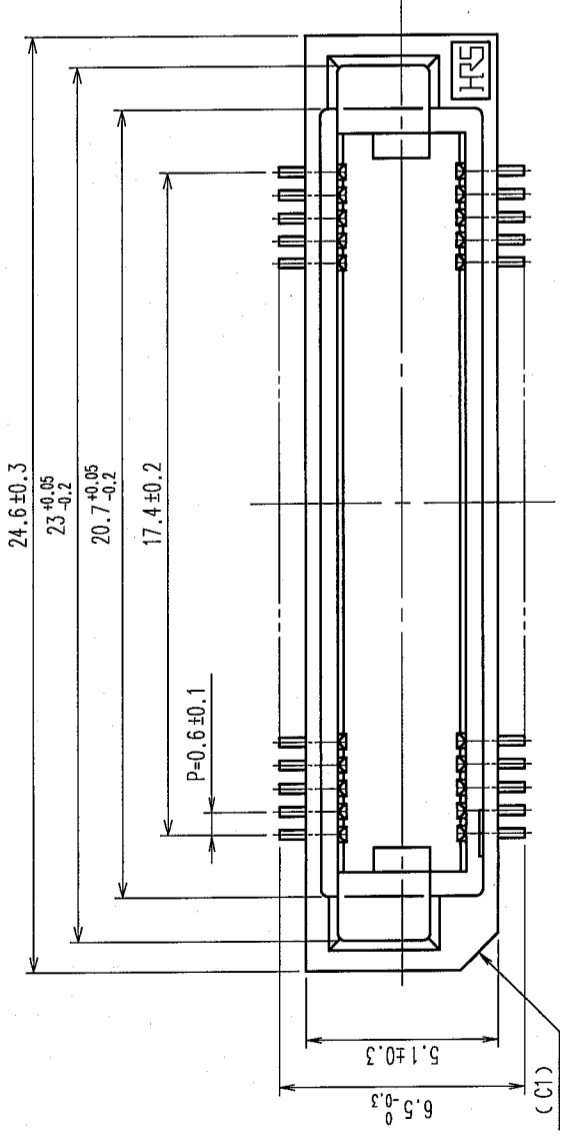
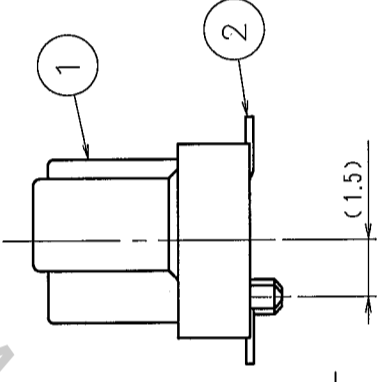
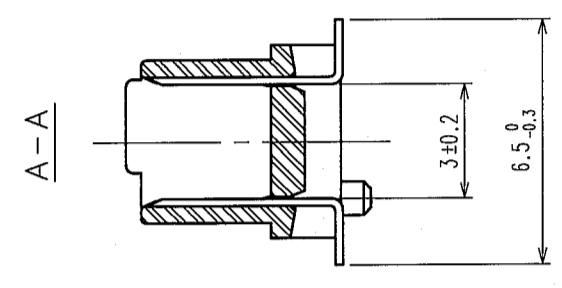


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△									
△									
△									

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)

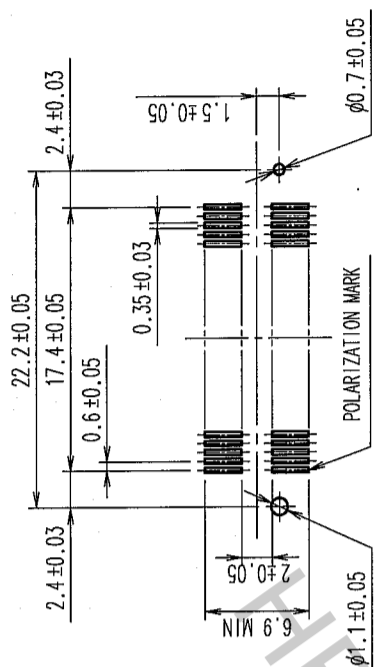


- NOTE.
1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CL					
DRAWN		DESIGNED		CHECKED	
K. NAKAMURA		K. NAKAMURA		J. Ogawa	
05.12.16		05.12.16		'05.12.16	
CL		APPROVED		RELEASED	
DRAWING NO.		PART NO.			
EDC3-150831-21		FX8C-60P-SV1(91)			
SCALE		CODE NO.			
5 : 1		CL578-0521-6-91		1/2	
UNITS		HIROSE ELECTRIC CO., LTD.		FORM NO. 229	
mm				8	

TO
PCK

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

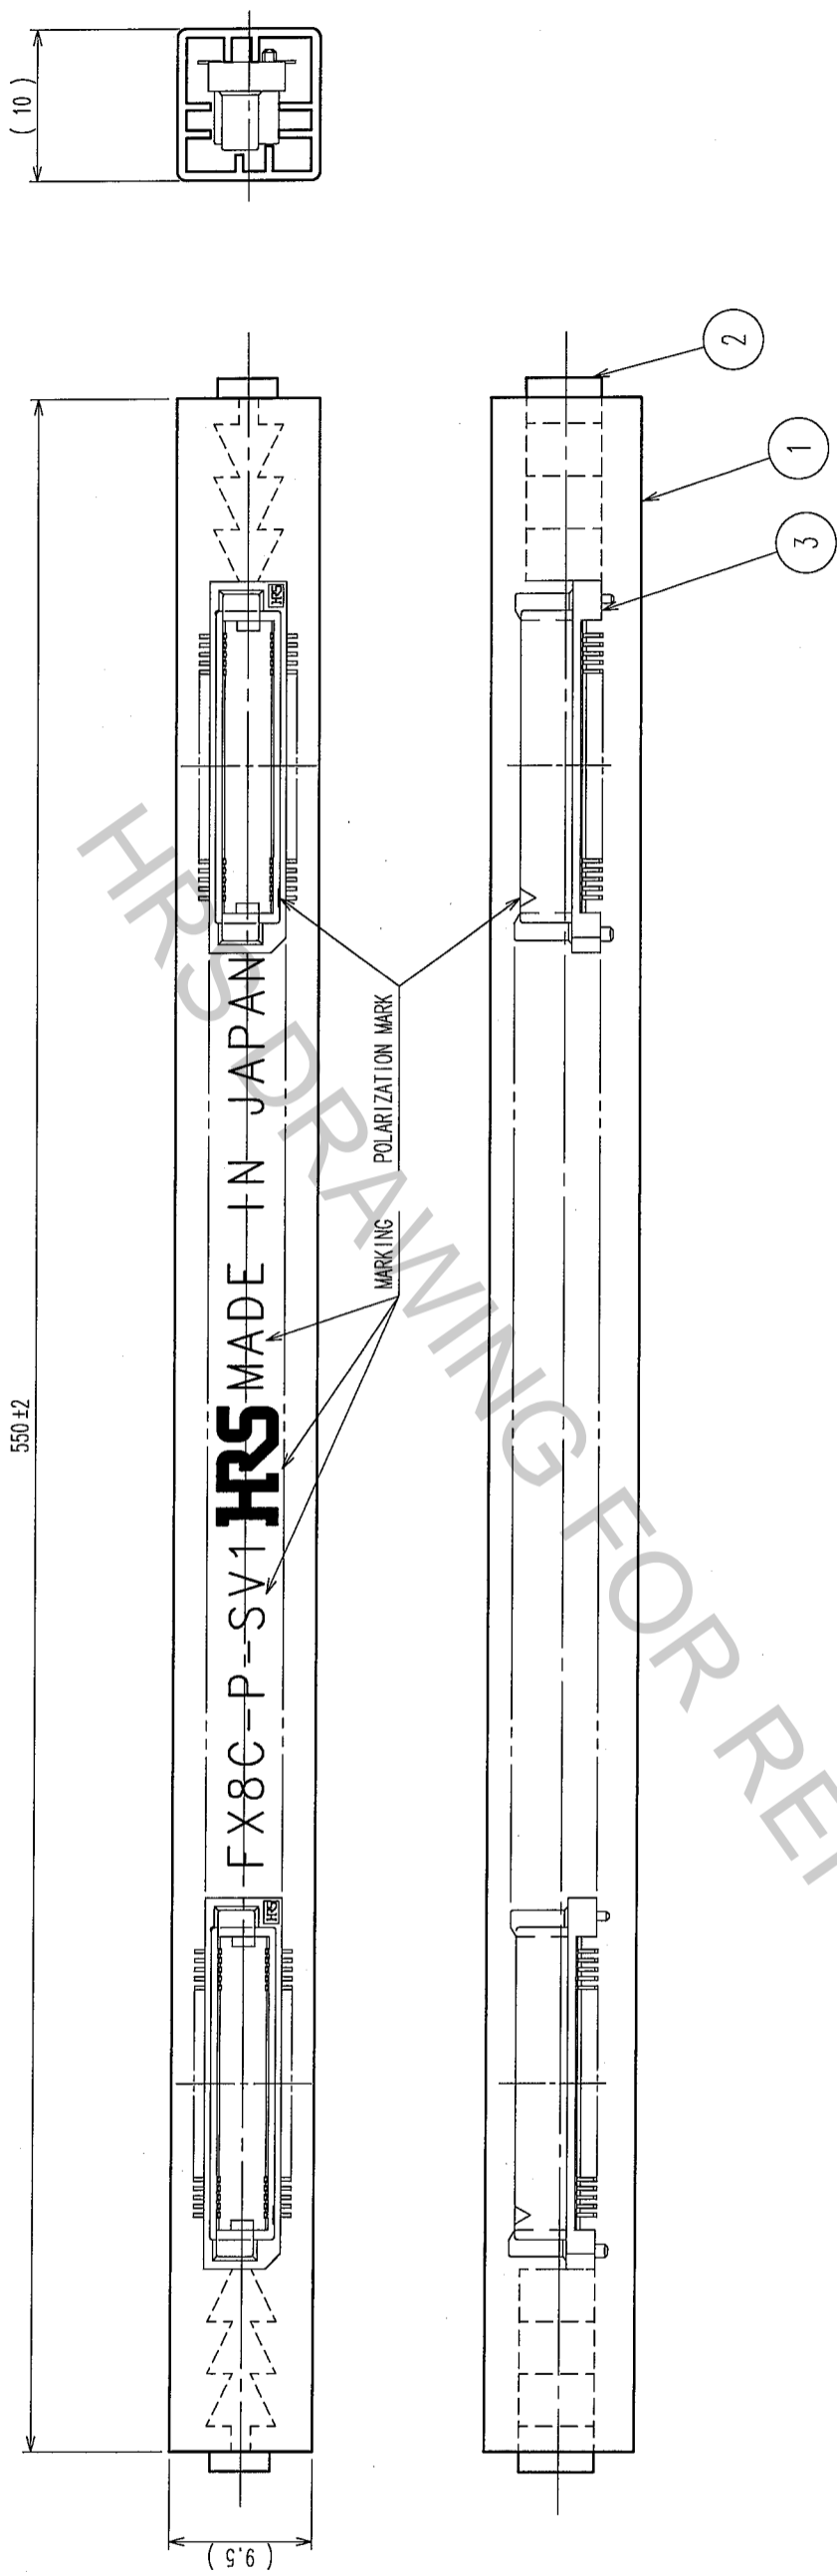

NOTE 1. 1 TUBE : 21 CONNECTORS.
 2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2		POLYVINYL CHLORIDE (STOPPER)		3		(CONNECTOR)	
NO.	MATERIAL	FINISH, REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	CL		K.NAKAMURA	K.NAKAMURA	N. Ogawa	H. Okawa	
			05.12.16	05.12.16	05.12.16	05.12.16	
DRAWING NO.		EDC3-150831-21		PART NO.		FX8C-60P-SV1(91)	
SCALE		FREE		CODE NO.		CL578-0521-6-91	
UNITS		mm					

TO	
PCK	