

L-937EW/1GEW

GREEN
HIGH EFFICIENCY RED

Features


- PRE-TRIMMED LEADS FOR PC MOUNTING.
- I.C. COMPATIBLE.
- BLACK CASE ENHANCES CONTRAST RATIO.
- HIGH RELIABILITY LIFE MEASURED IN YEARS.
- UL RATING : 94V-0.
- HOUSING MATERIAL: TYPE 66 NYLON.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The High Efficiency Red source color devices are made With Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

Package Dimensions

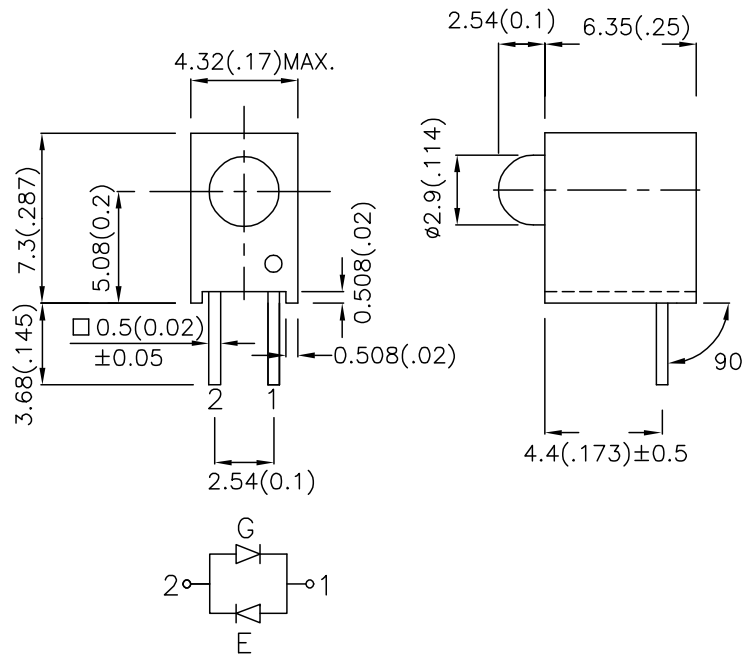

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20mA		Viewing Angle
			Min.	Typ.	2 θ 1/2
L-937EW/1GEW	GREEN (GaP)	WHITE DIFFUSED	7	16	60°
	HIGH EFFICIENCY RED (GaAsP/GaP)		7	20	

Note:

1.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at TA=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ _{peak}	Peak Wavelength	Green High Efficiency Red	565 627		nm	I _F =20mA
λ _D	Dominate Wavelength	Green High Efficiency Red	568 625		nm	I _F =20mA
Δλ _{1/2}	Spectral Line Half-width	Green High Efficiency Red	30 45		nm	I _F =20mA
C	Capacitance	Green High Efficiency Red	15 15		pF	V _F =0V;f=1MHz
V _F	Forward Voltage	Green High Efficiency Red	2.2 2.0	2.5 2.5	V	I _F =20mA

Absolute Maximum Ratings at TA=25°C

Parameter	Green	High Efficiency Red	Units
Power dissipation	105	105	mW
DC Forward Current	25	30	mA
Peak Forward Current [1]	140	160	mA
Operating / storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 5 Seconds		

Notes:

- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2mm below package base.

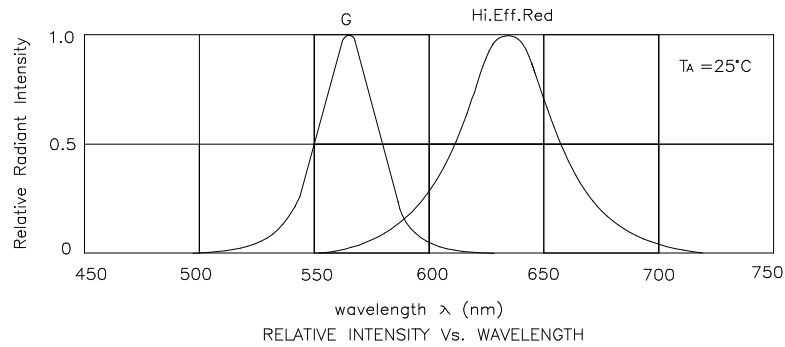

Green / High Efficiency Red

L-937EW/1GEW

