





This document is the property of Amphenol Corporation and is addressed on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for any purpose other than that for which it was prepared by Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

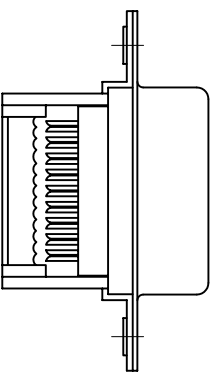

STRAIN RELIEF

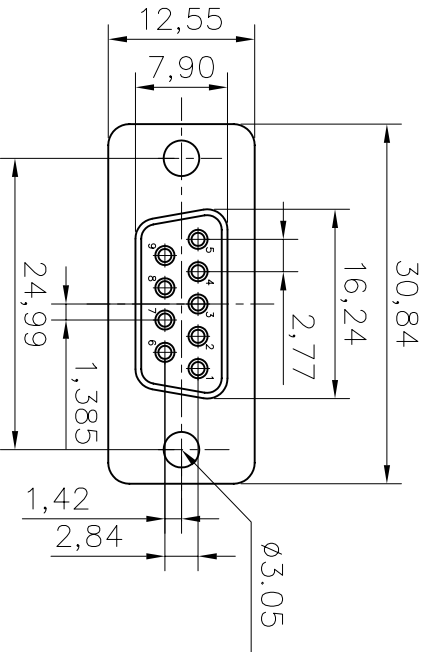


REVISIONS			DATE	APPROVED
S/N	EDN	DESCRIPTION		
A			09/27/07	

D-SUB TECHNICAL DATA

SHELL : Steel with nickel plating
 BODY : Glass filled thermoplastic. Flame retarding to UL94 V-0
 CONTACTS : Brass, gold flash over 1.25um (50u") min nickel
 ELECTRICAL : Voltage rating : 250 V RMS at 60 Hz, Current rating 5A.
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -40 °C up to 125°C
 Damp heat 56 days(40 °C-95% HR)
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 17D E FR A 09 S

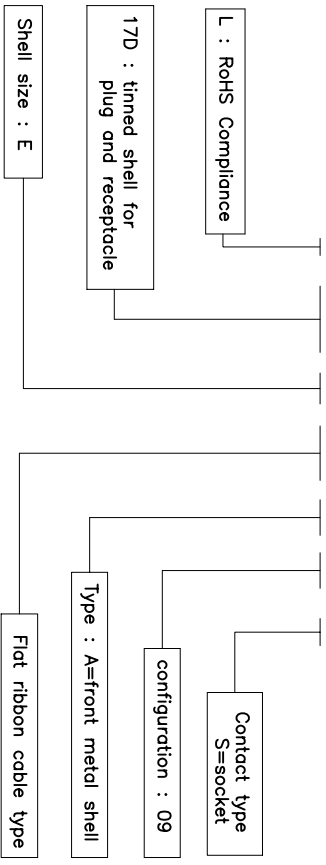

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.4 .XX +/- 0.30 .XXX +/- 0.20 FRACTIONS +/- ANGLES +/- 2°		APPROVAL DATE DRAWN Date: and 09/27/07 CHECKED 16k. veng 09/27/07 CHECKED		AMPHENOL IDC Flat Cable D-Sub Series	
FOR MATERIALS AND FINISHES REMOVE SHARP EDGES DIMENSIONS IN MILLIMETERS DIMENSIONS IN MILLIMETERS FINISH		DRAWING FILE : PE master drawing /Subd ANGLE OF PROJECTION		SIZE: DRAWING NO. A4 SCALE: NONE REV.: A	
FINISH		FINISH		SHEET 1 OF 1	