

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® ST-HF-M	14.11.2013

SKINTOP® halogen-free
Maximum reliability
Extremely flame-retardant according to UL 94 V0
Completely halogen-free (including sealing material)
Self-extinguishing, no dripping
Permanent vibration protection



Good chemical resistance



Wide clamping range



Halogen-free



Variety of approval certifications

Info

Cable gland for railway applications- Fire protection on railway vehicles Approval according to DIN EN 45545-2:2013

Application range

When the protection of people and property is a priority.
Public buildings
Ventilation systems
Tunnel construction
Underground railways and trains

Design

Metric connection thread acc. to EN 50262

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Light grey (RAL 7035)
Material:	Polyamide UL 94V-0 - halogen-free Sealing ring: LSE 1 - halogen-free O-ring: LSE 1 - halogen-free
Tests:	Filament wire test EN 60695-2-1/1 +960 °C
Protection rating:	IP 68 - 5 bar
Temperature range:	-20 °C to +100 °C

Product Management	Document: LAPP_PRO978EN.pdf	1 / 3
--------------------	-----------------------------	-------




SKINTOP® ST-HF-M

14.11.2013

Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)	Pieces / PU
SKINTOP® ST-HF-M						
53111407	ST-HF-M 12 x 1,5	4-5,5	15	30.0	8.0	100
53111417	ST-HF-M 16 x 1,5	4,5-9	19	34.0	8.0	100
53111427	ST-HF-M 20 x 1,5	7-13	25	37.0	9.0	100
53111437	ST-HF-M 25 x 1,5	9-17	30	40.0	10.0	50
53111447	ST-HF-M 32 x 1,5	11-21	36	47.0	10.0	25
53111457	ST-HF-M 40 x 1,5	19-28	46	52.0	10.0	10
53111467	ST-HF-M 50 x 1,5	27-35	55	62.0	12.0	5
53111477	ST-HF-M 63 x 1,5	34-45	66	71.0	12.0	5

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	SKINTOP® ST-HF-M	14.11.2013

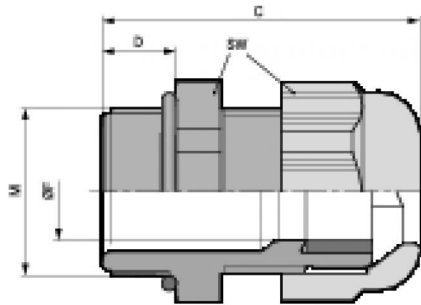

Product Management	Document: LAPP_PRO978EN.pdf	3 / 3
--------------------	-----------------------------	-------