

LED light bar OPBRGB5060-03012WL - PRODUCT DATASHEET



Voltage	12 V DC
Power	7,2 W/m
Luminocity	RGB
Qty LED	30 LED/m
Distance between LED	33,3 mm
Can be cut into section	10 cm


Powered by

Basic information:

- PL LINE PRODUCT- PROFESSIONAL LINE, HIGHEST QUALITY, LUMINOSITY AND DURABILITY
- PROFESSIONAL PCB MOUNTING, ONLY BRAND-NAME LED DIODES (LITEON)
- MODULES CAN BE SPLIT INTO 10 CM SECTIONS (3LED)
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTION WITH ONE POWER-SUPPLY POINT: 5M)

Typical application:

- DECORATIVE LIGHTING
- CEILING, WALL, NICHE, SHELF, PASSAGeways BACKLIGHTING
- ADVERTISING (SIGNBOARDS): SHOP, MUSEUM, TARDE FAIRS EXPOSITIONS ETC.

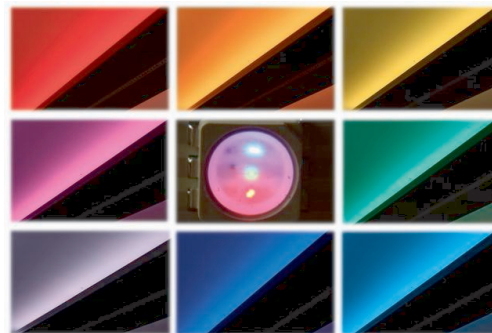

UWAGA
ZACHOWAĆ OSTROŻNIEŚĆ
ELEMENTY WYKAZUJĄCE
NA WYKŁADANIA
ELEKTROSTATYCZNE




PRODUKT WYKONANY
Z PODZESPOŁÓW
ZGODNYCH Z NORMĄ
RoHS



IP20

Additional Information

Color	Red R	Green G	Blue B
Voltage		12 V DC	
Power		7,2 W/m	
Power of single LED		0,24 W	
Current		0,6 A/m	
Luminocity	35 lm/m	120 lm/m	30
Qty LED		30 LED/m	
Distance between LED		33,3 mm	
Can be cut into section		10 cm	
Width		10 mm	
Height		3 mm	
Color temperature / Wavelenght scope	619-635 nm	512-528 nm	463-475 nm
Beam angle		120°	
Color rendering index (Ra)		-	
Operating temperature		-25 - +60°C	
Storage temperature		-40 - +80°C	
IP degree		IP20	



In spite of all our efforts, we do not guarantee, that technical data doesn't include any mistakes or defects, which can't be basis of any claiming. Figures and pictures are for illustration only and can be different from authentic appearance of product.